



EU-TYPE EXAMINATION CERTIFICATE



The following model of Personal Protective Equipment has been subjected to an EU-type examination in accordance with the module B of the PPE regulation (2016/425) and has been shown to satisfy to essential health and safety requirements.

Certificate N° 0075/2867/162/02/19/0591 - EXT 01/02/19

Issued by CTC, Notified Body N°0075, to the following model of personal protective equipment :

Manufacturer : Honeywell Safety Products USA, Inc.
10 Thurber Boulevard, Smithfield RI 02917
United States

Description

PPE Type : *protective glove against mechanical risks*

Product reference : Rig Dog™ Xtreme 42-622BY

Glove description : Cut and sewn glove composed of Microfiber for oil and grip and abrasion resistance. Thermoplastic rubber pads in fingers and back of hand for impact resistance. A knitted fabric as the inner layer for comfort and sweat absorption

Available sizes : 6/XS 7/S 8/M 9/L 10/XL 11/XXL

Pictures :



Honeywell

Rig Dog™ Xtreme
42-622BY/ 8M



Address:
Honeywell Safety Products USA, Inc.
10 Thurber Boulevard
Smithfield, RI 02917
USA



Address should be printed on back side of the gloves or on a label inside the gloves.

Reference standard :

Levels of performance / class of protection

EN 420:2003+A1:2009

-

EN 388:2016

4 X 2 2 F P

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

Full description of the PPE, reference rules verified in the context of the EU-type examination and information given on the product are detailed in the manufacturer's technical file index 01 dated from February 2019

NOTA : Any modification to new items of the personal protective equipment object of this EU type approval certificate or any modification of the information contained in the manufacturer technical file which served for the deliverance of the EU type approval certificate (change of address, change of company status) should be brought to the attention of the notified body in accordance with Annex V §7.2 of Regulation 2016/425.

Issued in Lyon by
Lionel GAUDILLERE
PPE Certification Manager

Date of first issue : 21 February 2019
End of validity date : 21 February 2024



Original CTC



In application of the Regulation 2016/425 of the European parliament and the Council of 9th March 2016 related to Personal Protective Equipment and repealing the Directive 89/686/EEC.

www.ctcgroupe.com

cemarking@ctcgroupe.com

CTC - 4, rue Hermann Frenkel - 69367 Lyon cedex 07 - France
Tél. : +33 (0)4 72 76 10 10 - Fax : +33 (0)4 72 76 10 00 - ctclyon@ctcgroupe.com

Comité Professionnel de Développement Économique (CPDE) Cuir Chaussure Maroquinerie Ganterie
Loi 78-654 du 22.06.1978 - Siret 77564972600160 - Code NAF 9412Z - TVA FR 88775649726

Honeywell Safety Products USA, Inc.

MANUFACTURER'S TECHNICAL FILE TO THE PPE REGULATION 2016/425

| | | |
|---------------------------------|----------|---------------------------------|
| Reference of the product | : | Rig Dog™ Xtreme 42-622BY |
| Article code | : | |
| Technical file index | : | 01 |
| Last update | : | February 2019 |

IDENTIFICATION

| | | |
|----------------------------|---|--------------------------|
| Reference of the product : | : | Rig Dog™ Xtreme 42-622BY |
| Article code : | : | |
| Minor Variant | : | Rig Dog™ Xtreme 42-612BY |
| Technical file index : | : | 01 |
| Last update : | : | February 2019 |

Manufacturer :

Honeywell Safety Products USA, Inc.

10 Thurber Boulevard, Smithfield RI 02917

United States

tel : 716 827 1455

fax : 716 827 1419

Factory :

Huihong (Nantong) Safety Products Co., Ltd

No.108 Huaihe Road, Rudong New Development Zoon, Nantong City, Jiangsu Province, China

China

tel: +86 513 84536066

fax: +86 513 84129009

GLOVE DESCRIPTION

General glove description :

Cut and sewn glove composed of Microfiber for oil and grip and abrasion resistance. Thermoplastic rubber pads in fingers and back of hand for impact resistance. A knitted fabric as the inner layer for comfort and sweat absorption

type of coating finish : no coating

Visual description (picture back and palm sides) :



Field of use

Rigging, Warehouse, Mining, Heavy Duty Industry, Hand Tools, Mechanic, Parts Handling Fabrication, Heavy Construction, Automotive, Heavy Machinery, Railway

| Risk assessment (Essential Health and Safety Requirement. Annex II - PPE Regulation) | | | |
|--|---|-------------------------------------|--|
| | | Applicable | Covered by |
| §1 | Requirements defined in the Annex II §1 are applicable to all PPE | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking |
| §1.4 | Manufacturer's instructions and information is available | <input checked="" type="checkbox"/> | <input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking |
| §2.5 | PPE which may be caught up during use | <input checked="" type="checkbox"/> | <input type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input type="checkbox"/> Marking |
| §2.12 | PPE bearing one or more identification markings or indicators directly or indirectly relating to health and safety | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking |
| §3.1.1 | The PPE is intended to protect against impact caused by falling or ejected objects and collisions of parts of the body with an obstacle | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking |
| §3.3 | The PPE is intended to protect against mechanical injuries | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> Standard <input checked="" type="checkbox"/> Instruction for use <input checked="" type="checkbox"/> Marking |

Available sizes :

| Minimum length of glove (mm) | Sizes |
|------------------------------|--------|
| 220 | 6/XS |
| 230 | 7/S |
| 240 | 8/M |
| 250 | 9/L |
| 260 | 10/XL |
| 270 | 11/XXL |

Glove constitution :

| | Reference | Color | Material | Surfacic mass | Gauges | Thickness |
|---------|-----------|--|---|---------------|--------|-----------|
| Palm | | Red | 60% Cationic Dyeing Polyester, 20% Polyester, 20% Polyurethane (+Thermoplastic polyurethane Membrane) | | | |
| | | Yellow and white | 49% Aramid1414, 25% Polyester, 11% Glass fiber, 15% Steel fiber | | | |
| | | Black | Polyester 100% | | | |
| Back | | Black | Polyester 92% Spandex 8% | | | |
| | | Dark grey, light grey and bright green | Thermal Plastic Rubber (100% polyester fabric inside) | | | |
| Lining | | Black | 84% Blended polyester, 16% Polyurethane | | | |
| | | Black | 80% Polyester, 20% Polyurethane | | | |
| Cuff | | Black | 60% Neoprene, 40% Nylon | | | |
| | | Dark gray and light gray | Thermal Plastic Rubber | | | |
| | | Dark gray and light gray | Thermal Plastic Rubber | | | |
| | | Black | 60% Nylon, 40% Polyester | | | |
| Binding | | Black | 88% Nylon, 12% Spandex | | | |

PROTECTION SCOPE

This glove meets the essential requirements of the Personal Protective Equipment Regulation 2016/425.

This glove is designed for against mechanical risks.

It is a category II product.

GENERAL REQUIREMENTS

Standard EN 420 : 2003 + A1 : 2009

Dexterity : 2
 Size : conform

At the date of certificate the product is in compliance with Annex XVII of REACH regulation (n° 1907/2006 and revisions)

SPECIFIC REQUIREMENTS AND PERFORMANCE LEVELS

Mechanical hazard EN 388 : 2016

| Protection offered | Performance levels |
|--------------------------------------|--------------------|
| Abrasion resistance | 4 |
| Blade cut resistance | X |
| Tear strength resistance | 2 |
| Puncture resistance | 2 |
| Cut Resistance method (EN ISO 13997) | F |
| Impact Protection | P |

Impact protection is claimed on the following areas : Back metacarpal knuckles

The levels of performance have been measured on the palm (except Impact Protection)

« X » indicates that the glove has not been submitted to the test or the test method appears not to be suitable for the glove design or material.

TEST REPORTS

| Laboratory | CTC | Other |
|------------------------|--|-------|
| EN 420 + innocuousness | S180809922_1, S181216655_1, S180809983_1PHA, Azo Dye S180911937_1 Binding D190102063_1 Lining S180709477_ Sizing & Dexterity | |
| EN 388 | S180809922_1 | |
| Other | S180809922_1 S180809983_1 | |

MARKING - PACKAGING

Information printed on the glove :

Logo of Manufacturer :

Logo 

Glove's reference : Rig Dog™ Xtreme 42-622BY

Article Code :

Size indicator


Pictograms related to risks against which protection is offered with performance levels

Information pictogram

Address of Manufacturer :

Date of Manufacture (month/year) and/or Serial number :

Marking example :

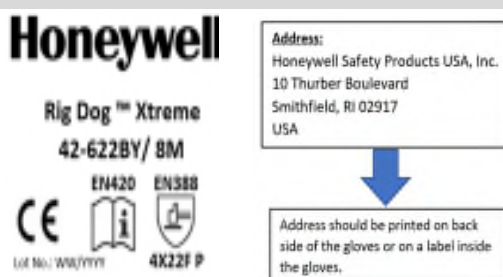

Method of marking on the glove :

Label included on the same glove.

Packaging :

1 polybag per pair, 6 pairs are packed in a big polybag and 72 pairs in a carton

PPE subject to ageing :

The design performance can not be significantly affect by ageing when stored in appropriate conditions (humidity, temperature, clean , ventilated, light).

Declaration of conformity :

Available on : <https://doc.honeywellsafety.com/>

MEANS OF CONTROL

Final inspection plan : in accordance to ISO 2859 level 1
Major defects : NQA = 1,5 / Minor defects : NQA = 10.

| Sampling Plan | | Quantity of acceptable defects | |
|---------------|-----------------|--------------------------------|---------------|
| Lot Quantity | Sample quantity | Minor Defects | Major Defects |
| 110 to 200 | D 8 | 2 | 0 |
| 201 to 500 | F 20 | 5 | 1 |
| 501 to 1200 | G 30 | 7 | 1 |
| 1201 to 10000 | J 80 | 14 | 3 |
| 10000 | K 125 | 21 | 5 |