

Miller Grip FBA Models: 494 (Friction Bolt Anchorage) Connector

Description

The 494 Miller Grip FBA (Friction Bolt Anchorage) Connector is a portable and re-useable anchor point that is mounted into a Friction Bolt (see photo at right.) The Grip is designed for use in a 39 mm Friction Bolt and must be inserted 4 to 8 inches. The 494 Grip can be reused again and again.

Materials*

1. Spoon Wedges:	Stainless Steel
2. End Fitting:	Stainless Steel
3. Cleaning Bushing:	Stainless Steel
4. Stop Sleeve:	Stainless Steel
5. Main Cable:	7x19 Galvanized
6. Swage:	Zinc Coated Copper
7. Wire Guide:	Polyurethane
8. Return Wire:	1x19 Galvanized
9. Trigger:	Aluminum
10. Spring:	Zinc-plated Copper
11. Thimble:	Steel w/Green Powder Coat


*All hardware meets ASTM (50) fifty-hour salt spray test requirements.

Technical

Weight	1 lb. (0.45 kg)
Max Working Load	400 lbs (181 kg)

Certification

Meets all ANSI A10.32, Z359.1 and OSHA 1926.502 requirements.

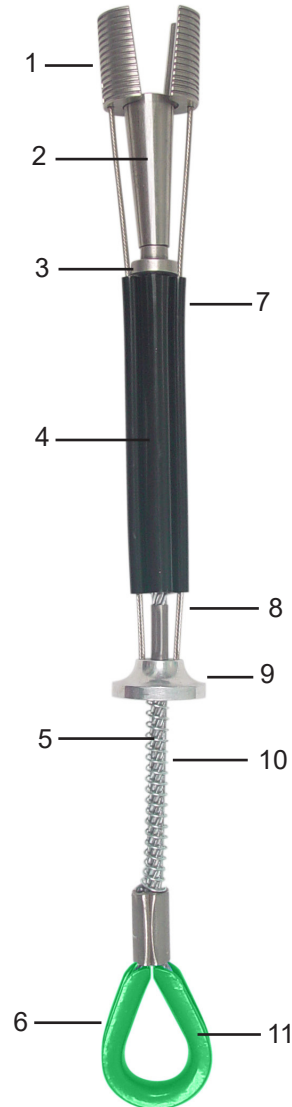

Limitless Possibilities. Ask the Expert.
Technical Service: 800.873.5242
www.millerfallprotection.com

Honeywell Industrial Safety
900 Douglas Pike
Smithfield, RI 02917

USA
Phone: 800.430.5490
Fax: 800.322.1330

Canada
Phone: 888.212.7233
Fax: 888.667.8477

⚠ This equipment should only be used after reading and understanding the manufacturer's instructions. Failure to follow instructions could result in serious injury or fatality.