



## Voyager™ 1202 Battery End Cap Installation

1. Open the latch by pinching and lifting up.

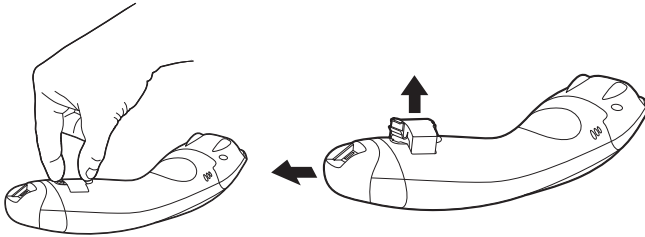


2. Remove the battery and end cap.

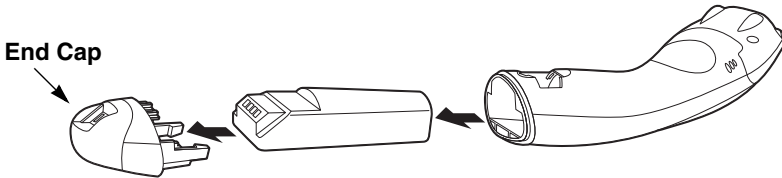


3. Insert charged battery and replace the end cap.

## Voyager™ 1202 Battery Latch Installation

1. Open the latch by pinching and lifting up. Squeeze the sides of the latch to completely remove the latch from the scanner.





2. Remove the battery and end cap.

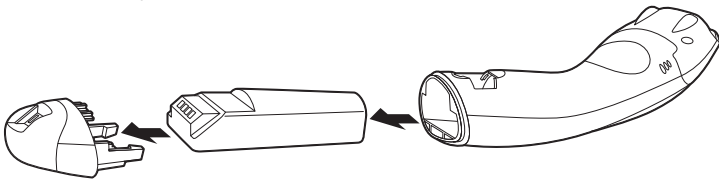

3. Replace the latch by ensuring the locking tab faces the bottom of the scanner and the text on the latch faces the same direction as the text on the scanner.

**Locking tab  
facing  
bottom of  
scanner**

4. Pinch the sides of the replacement latch and slide into place.



5. Lift up on the latch, without removing it, and replace the battery and end cap.
6. Slide the latch back into place and press to lock it.