


DO NOT SCALE DRAWING  
 ALL CHANGES TO DRAWING MUST BE DONE ON CAD

B-1228-D REV.

THIRD ANGLE PROJECTION

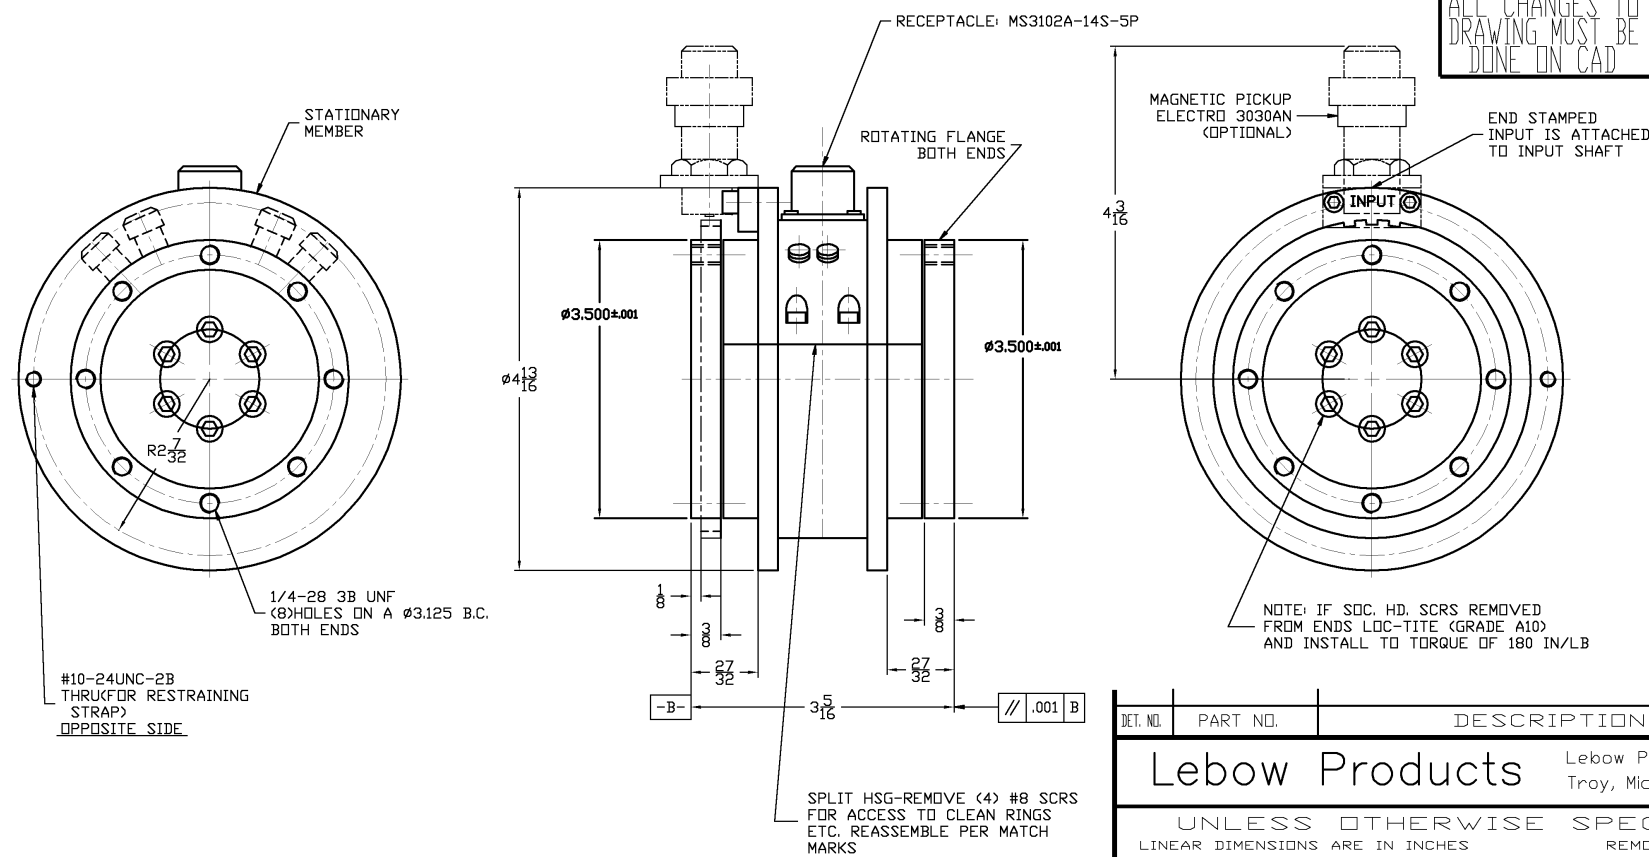

NOTE: IF SDC. HD. SCRS REMOVED FROM ENDS LOC-TITE (GRADE A10) AND INSTALL TO TORQUE OF 180 IN/LB

SPLIT HSG-REMOVE (4) #8 SCRS FOR ACCESS TO CLEAN RINGS ETC. REASSEMBLE PER MATCH MARKS

#10-24UNC-2B THRU(FOR RESTRAINING STRAP) OPPOSITE SIDE

1/4-28 3B UNF (8)HOLES ON A Ø3.125 B.C. BOTH ENDS

J	REDRAW ON CAD	5/16/03
SYM.	REVISIONS	DATE

DET. NO.	PART NO.	DESCRIPTION	REQ'D.
		<b>Lebow Products</b>	Lebow Products Troy, Michigan
UNLESS OTHERWISE SPECIFIED LINEAR DIMENSIONS ARE IN INCHES ANGULAR DIMENSIONS ARE IN DEGREES DIMENSION LIMITS HELD AFTER PLATING			
		REMOVE ALL BURRS & SHARP EDGES SURFACE FINISH 125	✓
<b>TOLERANCES</b>		DR. BY: SALLY	CHK'D. BY: ENGR.
DRILLED HOLES - .000 + .007	TWO PLACE DECIMALS ± .01	THREE PLACE DECIMALS ± .005	ANGLES ± 0 '30'
SCALE: FULL	REF. DWG. B-10497	FRACTIONAL DIMENSIONS ± 1/64	MAT'L. ~
TITLE: DRIVE SHAFT TORQUE METER		DATE: 5/17/03	MODEL: 1228
		DRAWING NO. B-1228-D	REV.