


B-18576

NAMEPLATE (1) A-13634

B & 12 RING ASS'Y


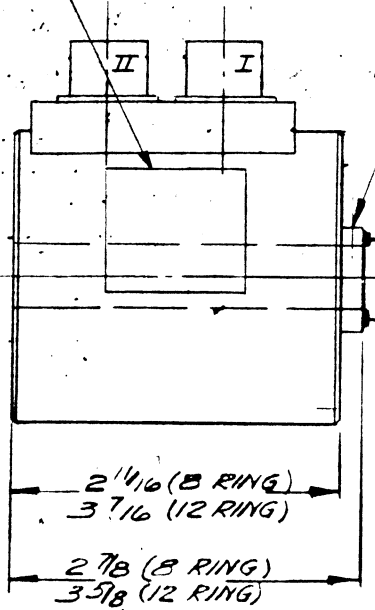


RECEPTACLE (TYP)
#PT02H-10-6P

4 RINGS
ASS'Y

REMOVABLE
BRUSH ASS'Y

#4-40 UNC TAP 1/2 DIA
4 HOLES EQ. SPACED IN
2.125 DIA. B. C. BOTH ENDS
(USED AT TERMINAL END FOR OVER MTS)

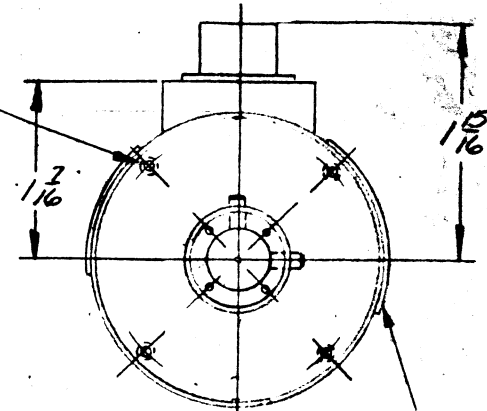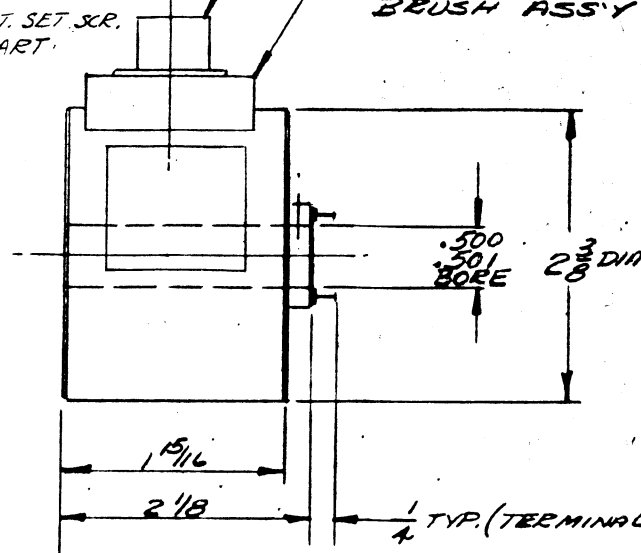

WARNING LABEL (1) A-30439

SCANNED
12/11/97

MAX. SPEED ~ 8000 R.P.M.

12 RING		8 RING		4 RING	
SHAFT PIN #	RECEPT. # PIN LETTER	SHAFT PIN #	RECEPT. # PIN LETTER	SHAFT PIN	RECEPT. PIN
1	A	1	A	1	B
2	B	2	B	2	C
3	C	3	C	3	A
4	D	4	D	4	D
5	E				
6	F				
7	A	5	A		
8	B	6	B		
9	C	7	C		
10	D	8	D		
11	E				
12	F				

DET. No		PART No		DESCRIPTION		REQ'D	
		G		NAMEPLATE & WARNING LABEL NOT SHOWN ECN 3407		3/19/82	
INSTALLATION DWG ~ SLIP RING ASS'Y							
SCALE: FULL		DRAWN BY: [Signature]		REF. DWG: B-18575		MAT'L: [Blank]	
DATE: 6-9-72		CHK'D BY: [Signature]		MODEL: B18-111		JOB NO. [Blank]	
UNLESS OTHERWISE SPECIFIED:							
TOLERANCE ON FRACTIONS ± 1/64		TOLERANCE ON DRILLED HOLES ± .007		TWO PLACE DECIMALS ± .010		REMOVE ALL BURRS & SHARP EDGES	
THREE PLACE DECIMALS ± .005		DIMENSION LIMITS HELD AFTER PLATING		SURFACE FINISH 125 ✓			
ANGLES: 0°							
LEBOW ASSOCIATES, INC. TROY, MICHIGAN						DRAWING NO. B-18576	
SYM.	REVISION	DATE					