

## Ozone

### Sensoric O3 3E 1



# Product Data Sheet

## Sensoric O3 3E 1

### FEATURES

Amperometric 3 electrode sensor cell  
Long life time  
High reliability  
High resolution  
Fast response time  
Fixed organic gel electrolyte

### TYPICAL APPLICATIONS

Environmental monitoring  
Indoor Air Quality, water treatment plants

### PART NUMBER INFORMATION

MINI	1531-031-30009
SENSORIC CLASSIC	1531-031-30069
CTL 4 series adaptation	1531-031-30049
CTL 7 series adaptation	1531-031-30079

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## Sensoric O3 3E 1

### TECHNICAL SPECIFICATIONS

Measuring Range	0–1 ppm
Sensitivity Range	1000 - 2000 nA/ppm (negative signal)
Zero Current at 20 °C	< ± 20 nA
Resolution at 20 °C	< 0.02 ppm
Bias Potential	0 mV
Linearity	< 10% full scale
Response Time at 20 °C	
t <sub>50</sub>	< 15 s calculated from 3 min. exposure time <sup>1)</sup>
t <sub>90</sub>	< 60 s calculated from 3 min. exposure time <sup>1)</sup>
Long Term Sensitivity Drift	< 10% per 6 months <sup>2)</sup>
Operation Conditions	
Temperature Range	-20 °C to +40 °C
Humidity Range	15–90% r.H., non–condensing
Effect of Humidity	abrupt changes will cause a short term drift
Sensor Life Expectancy	> 18 months
Warranty	12 months

1) At approx. 30 ccm/ min. (tolerance range to t<sub>90</sub> : 30 to 60 sec.; depend on air velocity; minimum gas flow 5 l/h)


2) At 20 °C and 30-50% r.H.; Sensitivity might increase over life time depending on application; high air flow conditions might effect life time.

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

# Product Data Sheet

## Sensoric O3 3E 1

Temperature dependence on zero reading:

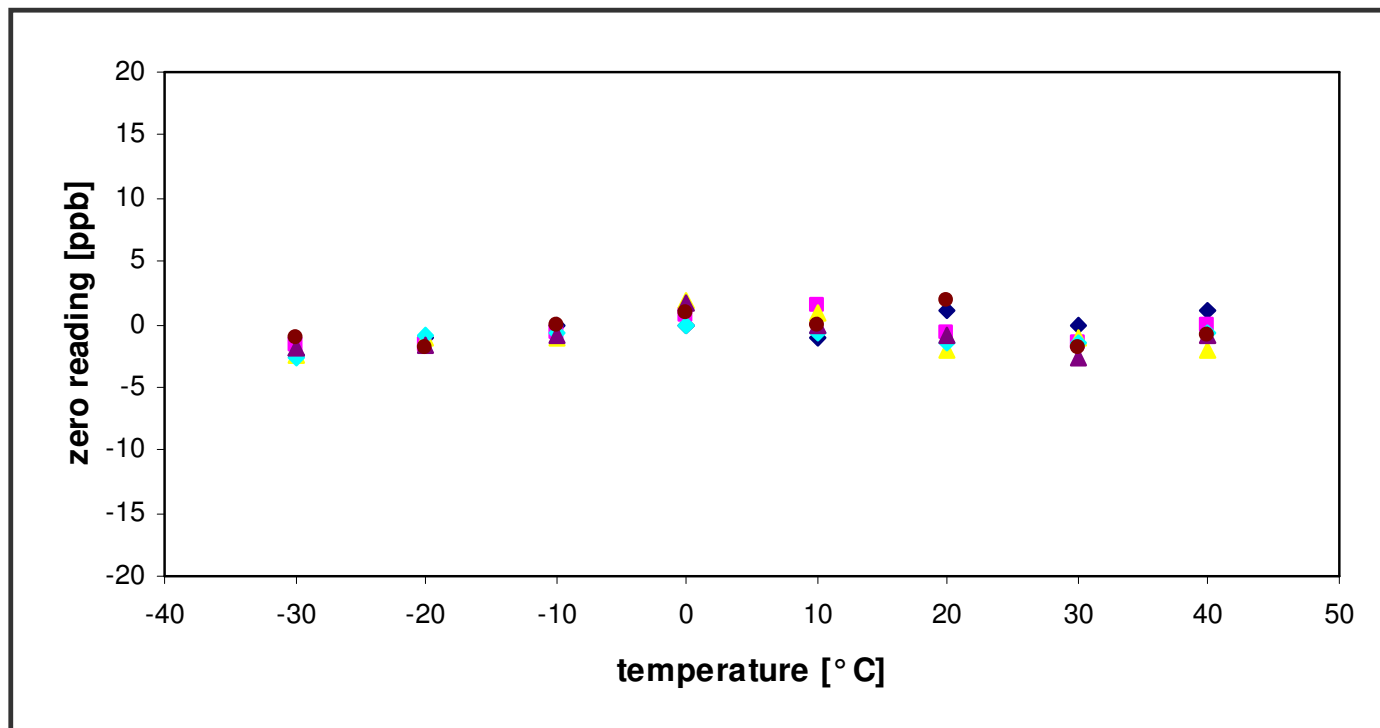


Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



## Sensoric O3 3E 1

**RELATIVE OUTPUT vs. TEMPERATURE:**  
(normalized to the output at 20 °C)

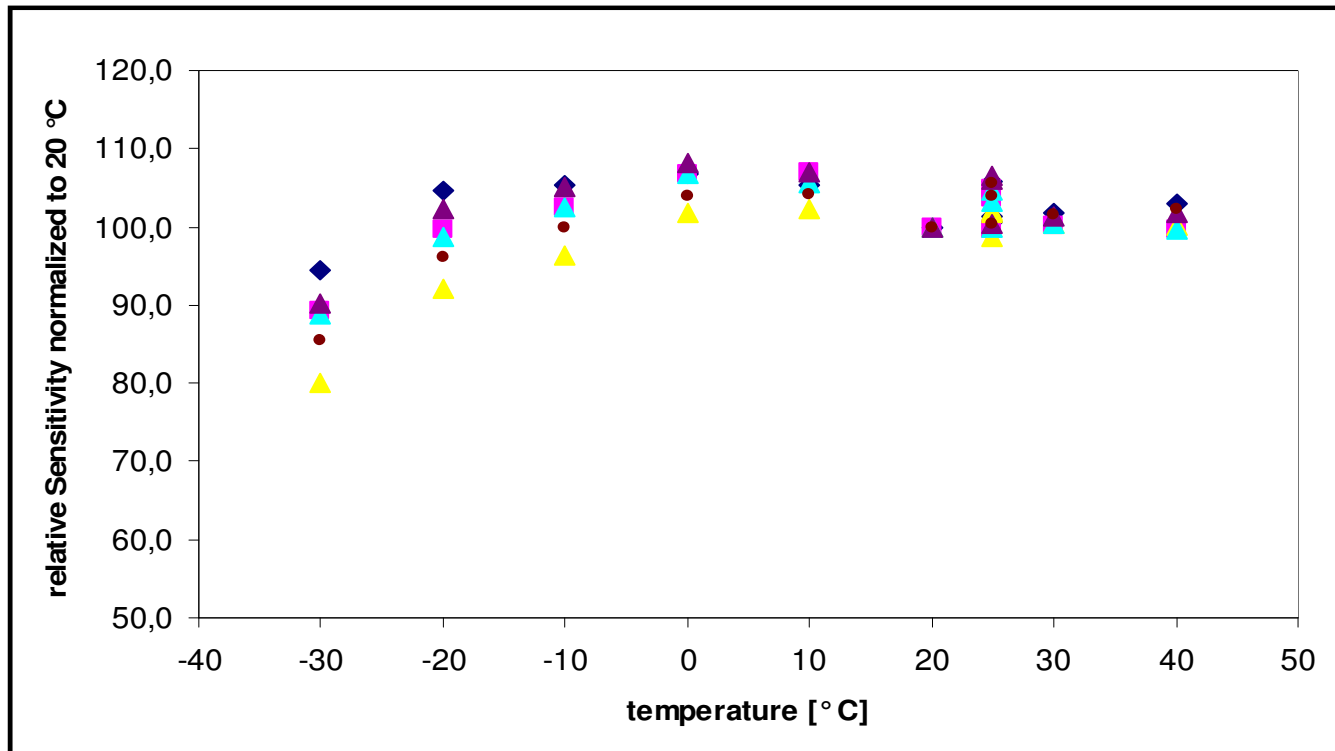

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## Sensoric O3 3E 1

### CROSS SENSITIVITIES AT 20°C

Gas	Concentration	Reading [ppm]
Bromine, Iodine		yes; n/d
Carbon Dioxide	5000 ppm	0
Carbon Monoxide	100 ppm	0
Chlorine	1 ppm	1.2
Chlorine Dioxide	1 ppm	1.5
Hydrazine	3 ppm	-3
Hydrogen	3000 ppm	0
Hydrogen Sulfide	20 ppm	-1.6 <sup>1)</sup>
Nitrogen	100 %	0
Nitrogen Dioxide	10 ppm	6

1) Continuous exposure at ppm level over more than 30 min. might blind the sensor.

#### Notes:

1. Interference factors may differ from sensor to sensor and with life time. It is not advisable to calibrate with interference gases.
2. This table does not claim to be complete. The sensor might also be sensitive to other gases.

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## Safety Note

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

## Attention

Use of the Sensoric range sensors requires complete understanding of the instructions. Before using Sensoric range sensors please carefully read 'Application Notes' which can be found at [www.citytech.com](http://www.citytech.com) under the heading 'Support' -> 'Application Notes' -> 'Sensoric'

Product Safety Data Sheets (PSDS) can be obtained at [www.citytech.com](http://www.citytech.com) under the heading 'Support' -> 'Product Safety Datasheets'

For further assistance on sensor selection and use, please contact a member of the Technical Sales team.

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

