


3 HOLES EQUALLY SPACED ON A 1.63" DIA B.C., #6-32 UNC X .25 DEEP

4 CONDUCTOR, SHIELDED, TEFLON INSULATED, COLOR CODED, 26 GA. CABLE: 5 FT. LONG, WITH 2" SPRING STRAIN RELIEF, (.19" DIA SPRING).

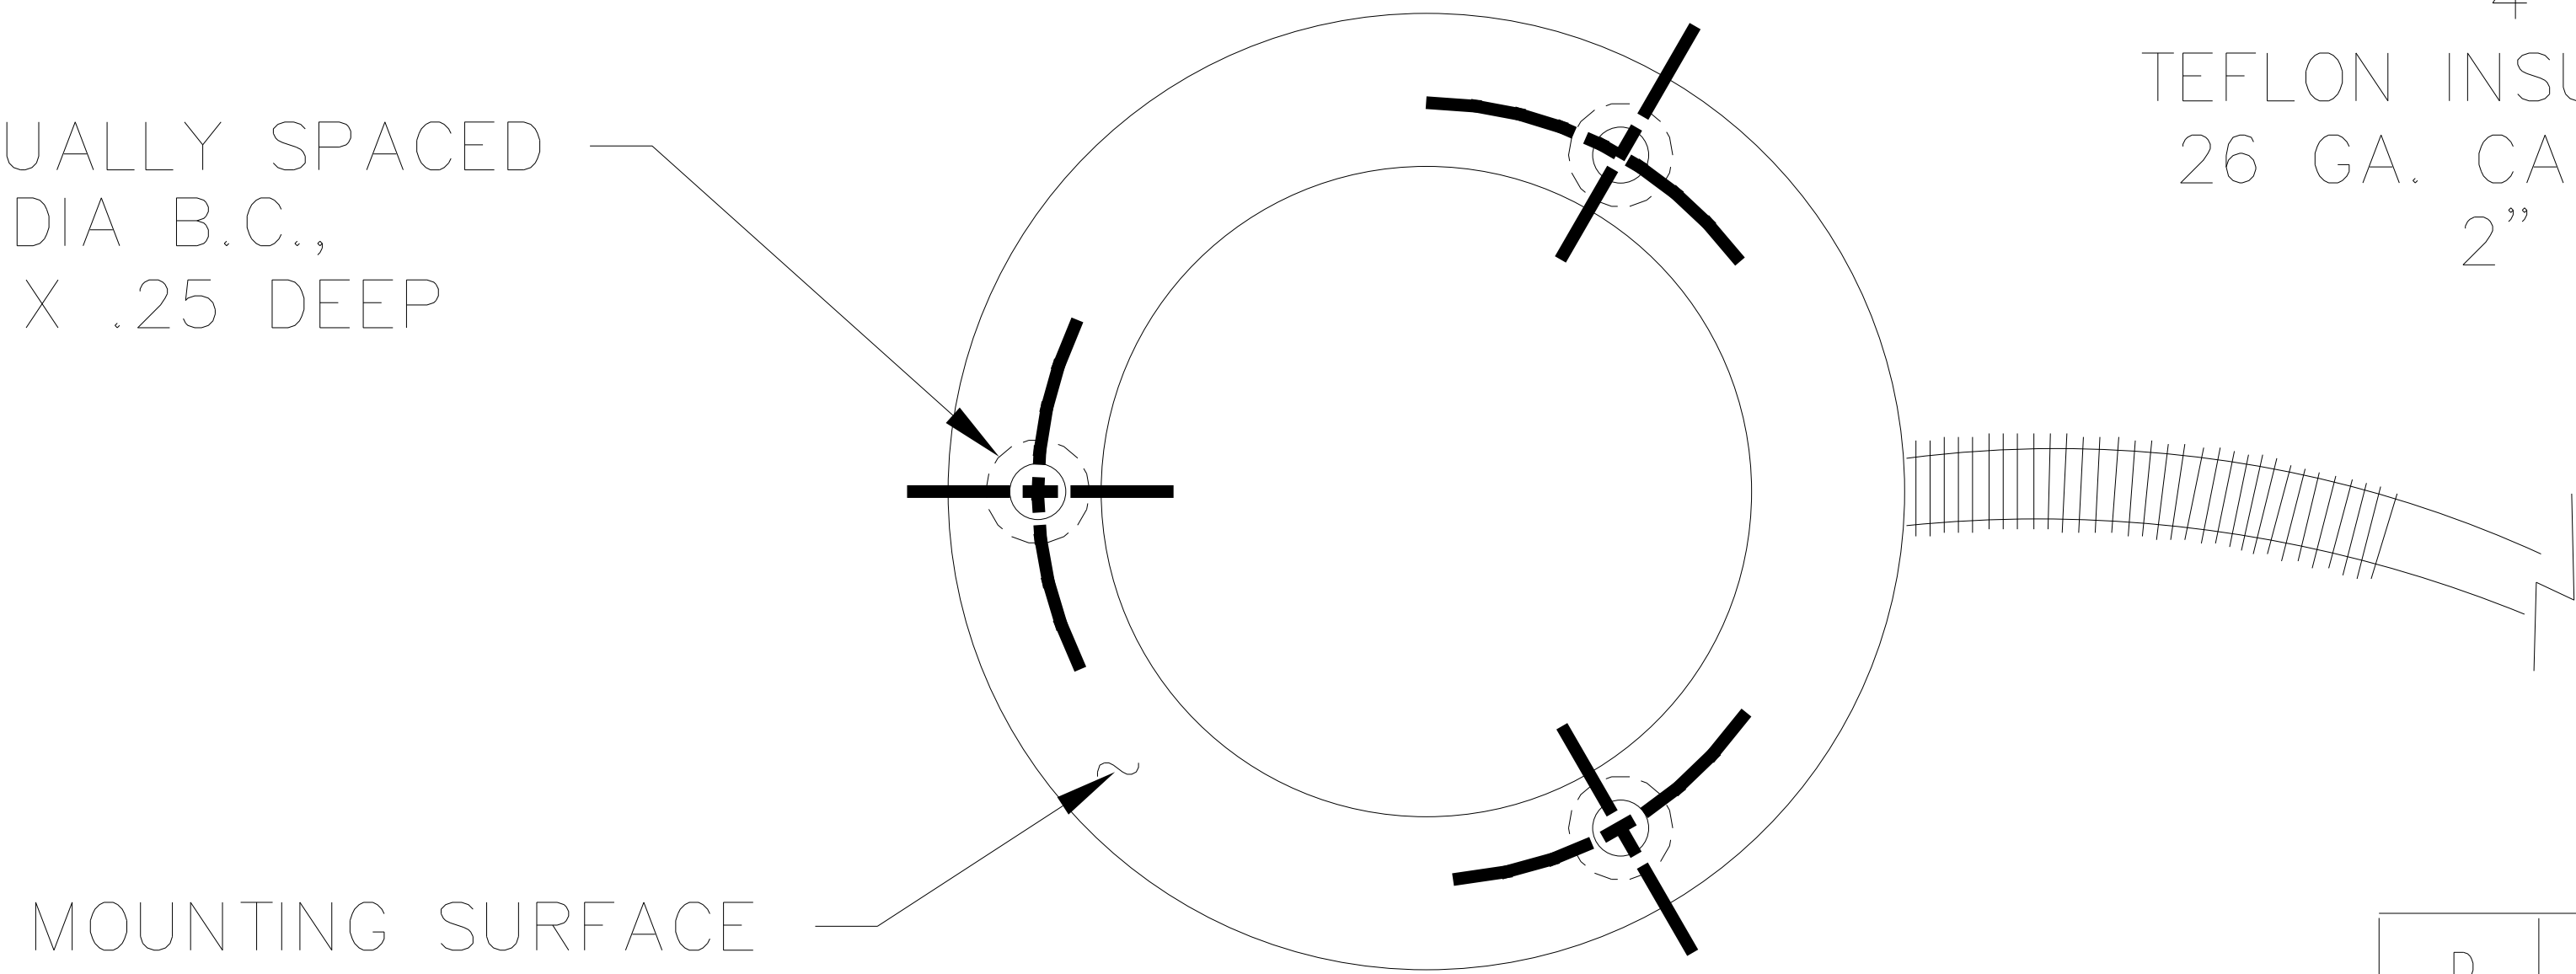

MOUNTING SURFACE

WIRING CODE	
4 cond. cable, no amp	
RED	+EXCITATION
BLACK	-EXCITATION
GREEN	-OUTPUT
WHITE	+OUTPUT

USED ON	P/N 060-0240
MATERIAL SPEC.	.X
	.XX
	.XXX
	✓
	✗

D	REDRAWN & REV. PER ECN # 2727	30DEC89 JJB	
REV	DESCRIPTION	REVISED BY	APPROV. RELEASE
SCALE: 1:1	DRAWN 2/7/78 JJB	CHECKED:	APPROVED:
<h1>SENSOTEC INC.</h1> <p>1200 CHESAPEAKE AVE. COLUMBUS, OHIO 43212</p>			
<h2>MODEL 53 LOAD CELL</h2> <p>0-15,000 LB THRU 0-30000 LB STD PROD</p>			
SHEET 1 OF 1		DOCUMENT NUMBER 000-0183-00	