


3 HOLES EQUALLY SPACED
ON A 1.00" DIA B.C.,
#6-32 UNC X .25 DEEP

4 CONDUCTOR, SHIELDED,
TEFLON INSULATED, COLOR CODED,
30 GA. CABLE: 5 FT. LONG, WITH
2" SPRING STRAIN RELIEF,
(.14" DIA SPRING).

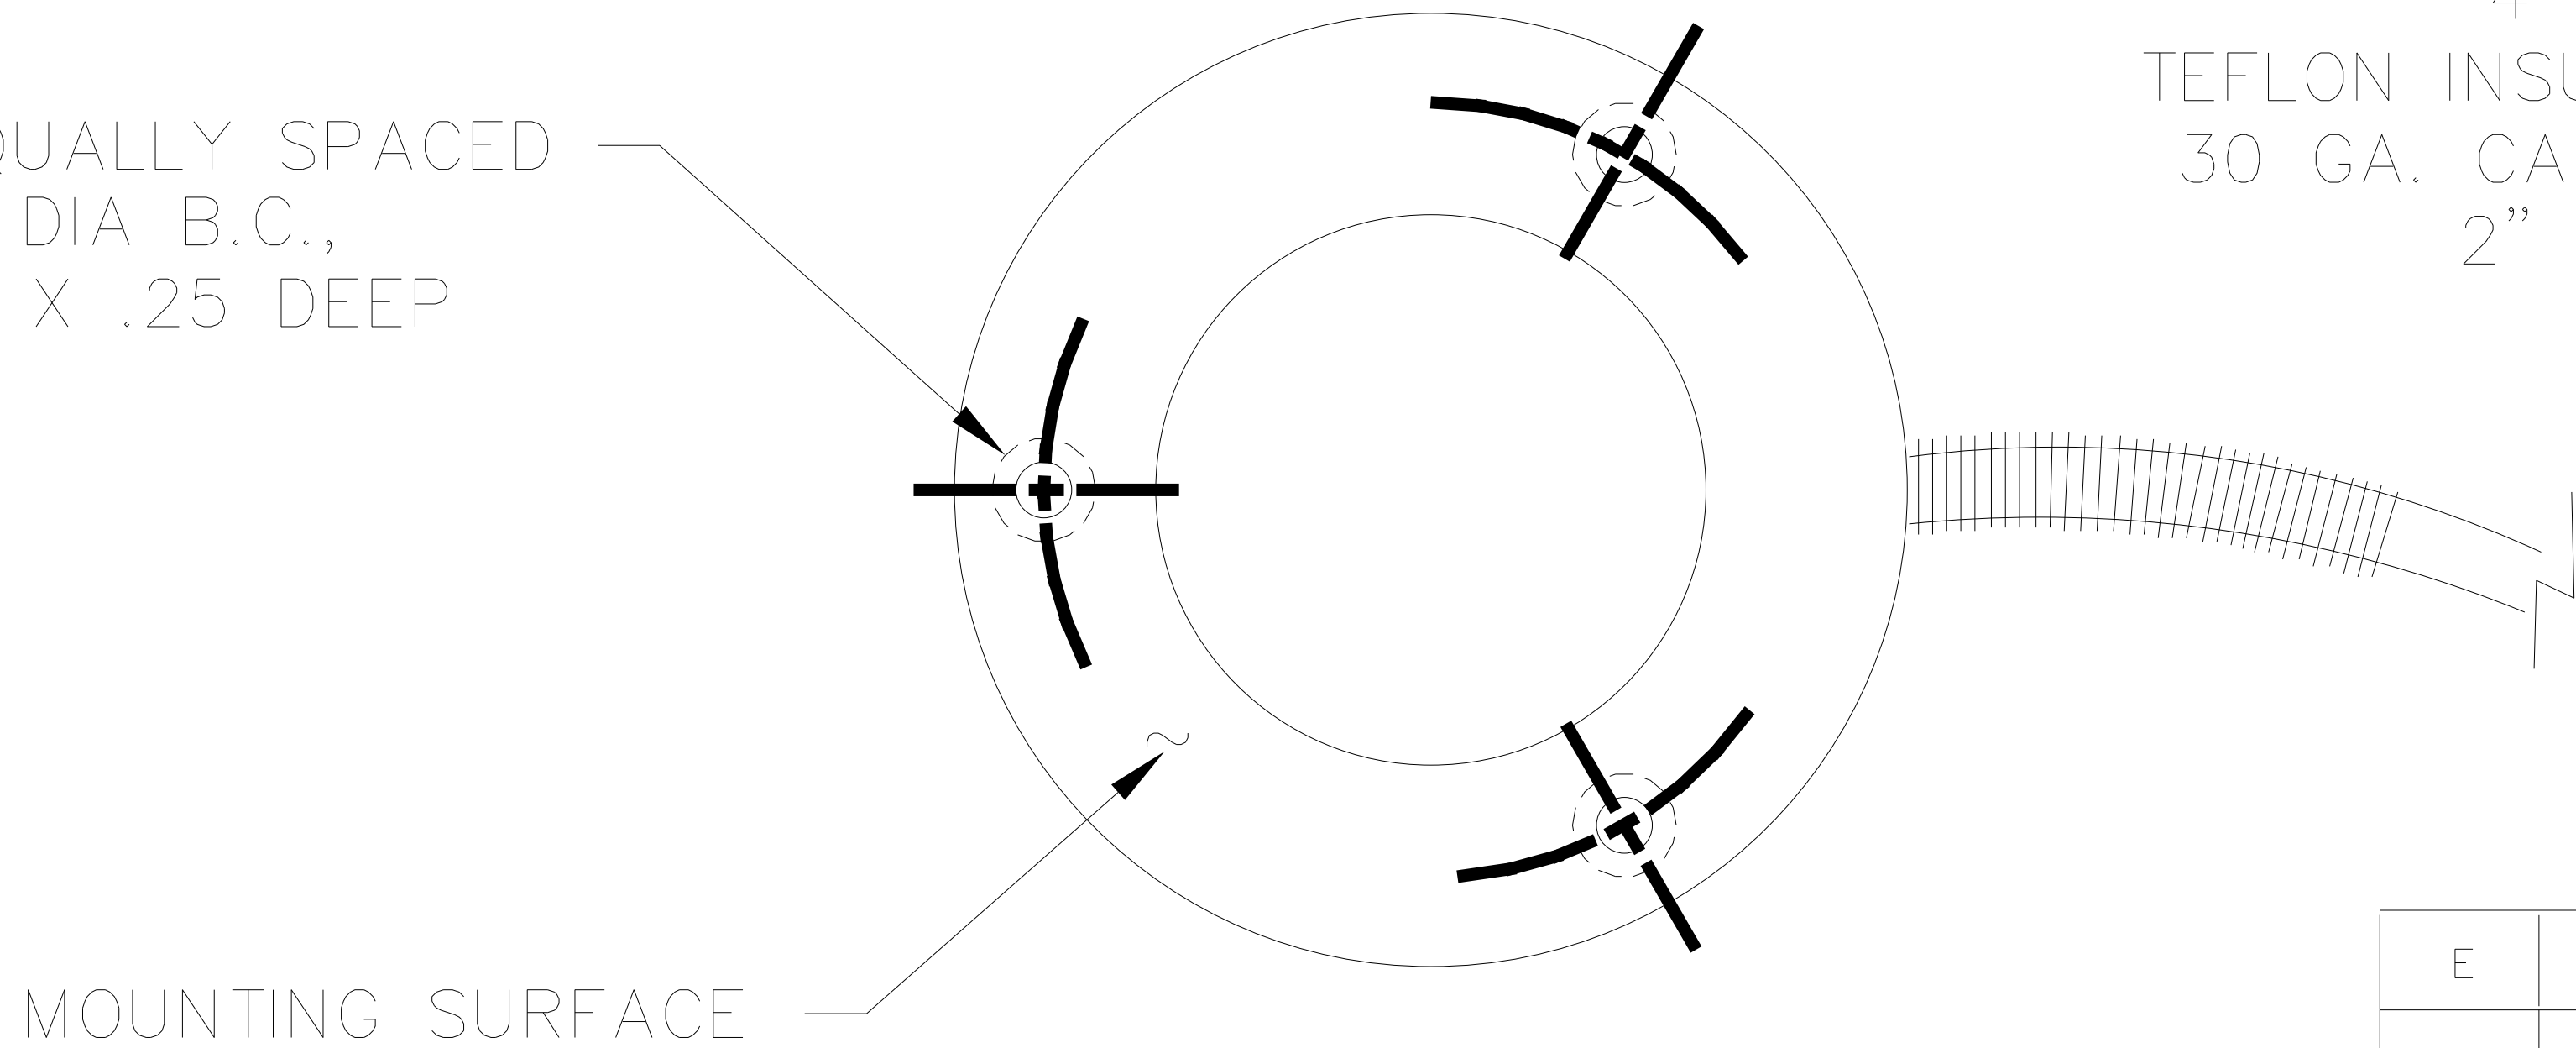

WIRING CODE

4 cond. cable, no amp
RED +EXCITATION
BLACK -EXCITATION
GREEN -OUTPUT
WHITE +OUTPUT

E	REDRAWN & REV. PER ECN # 2727	30DEC89 JJB	
REV	DESCRIPTION	REVISED BY	APPROV. RELEASE
SCALE: ~	DRAWN 2/7/78 JJB	CHECKED:	APPROVED:

USED ON	P/N 060-0238
MATERIAL SPEC.	.X
	.XX
	.XXX
	✓
	✗
SHEET	1 OF 1

<p>SENSOTEC INC. 1200 CHESAPEAKE AVE. COLUMBUS, OHIO 43212</p>	
<p>MODEL 53 LOAD CELL 0-200 LB THRU 0-2500 LB STD PROD</p>	
<p>DOCUMENT NUMBER 000-0371-00</p>	