


3 HOLES EQUALLY SPACED ON A 1.63" DIA B.C., #6-32 UNC X .25 DEEP

4 CONDUCTOR, SHIELDED, TEFLON INSULATED, COLOR CODED, 26 GA. CABLE: 5 FT. LONG, WITH 2" SPRING STRAIN RELIEF, (.19" DIA SPRING).

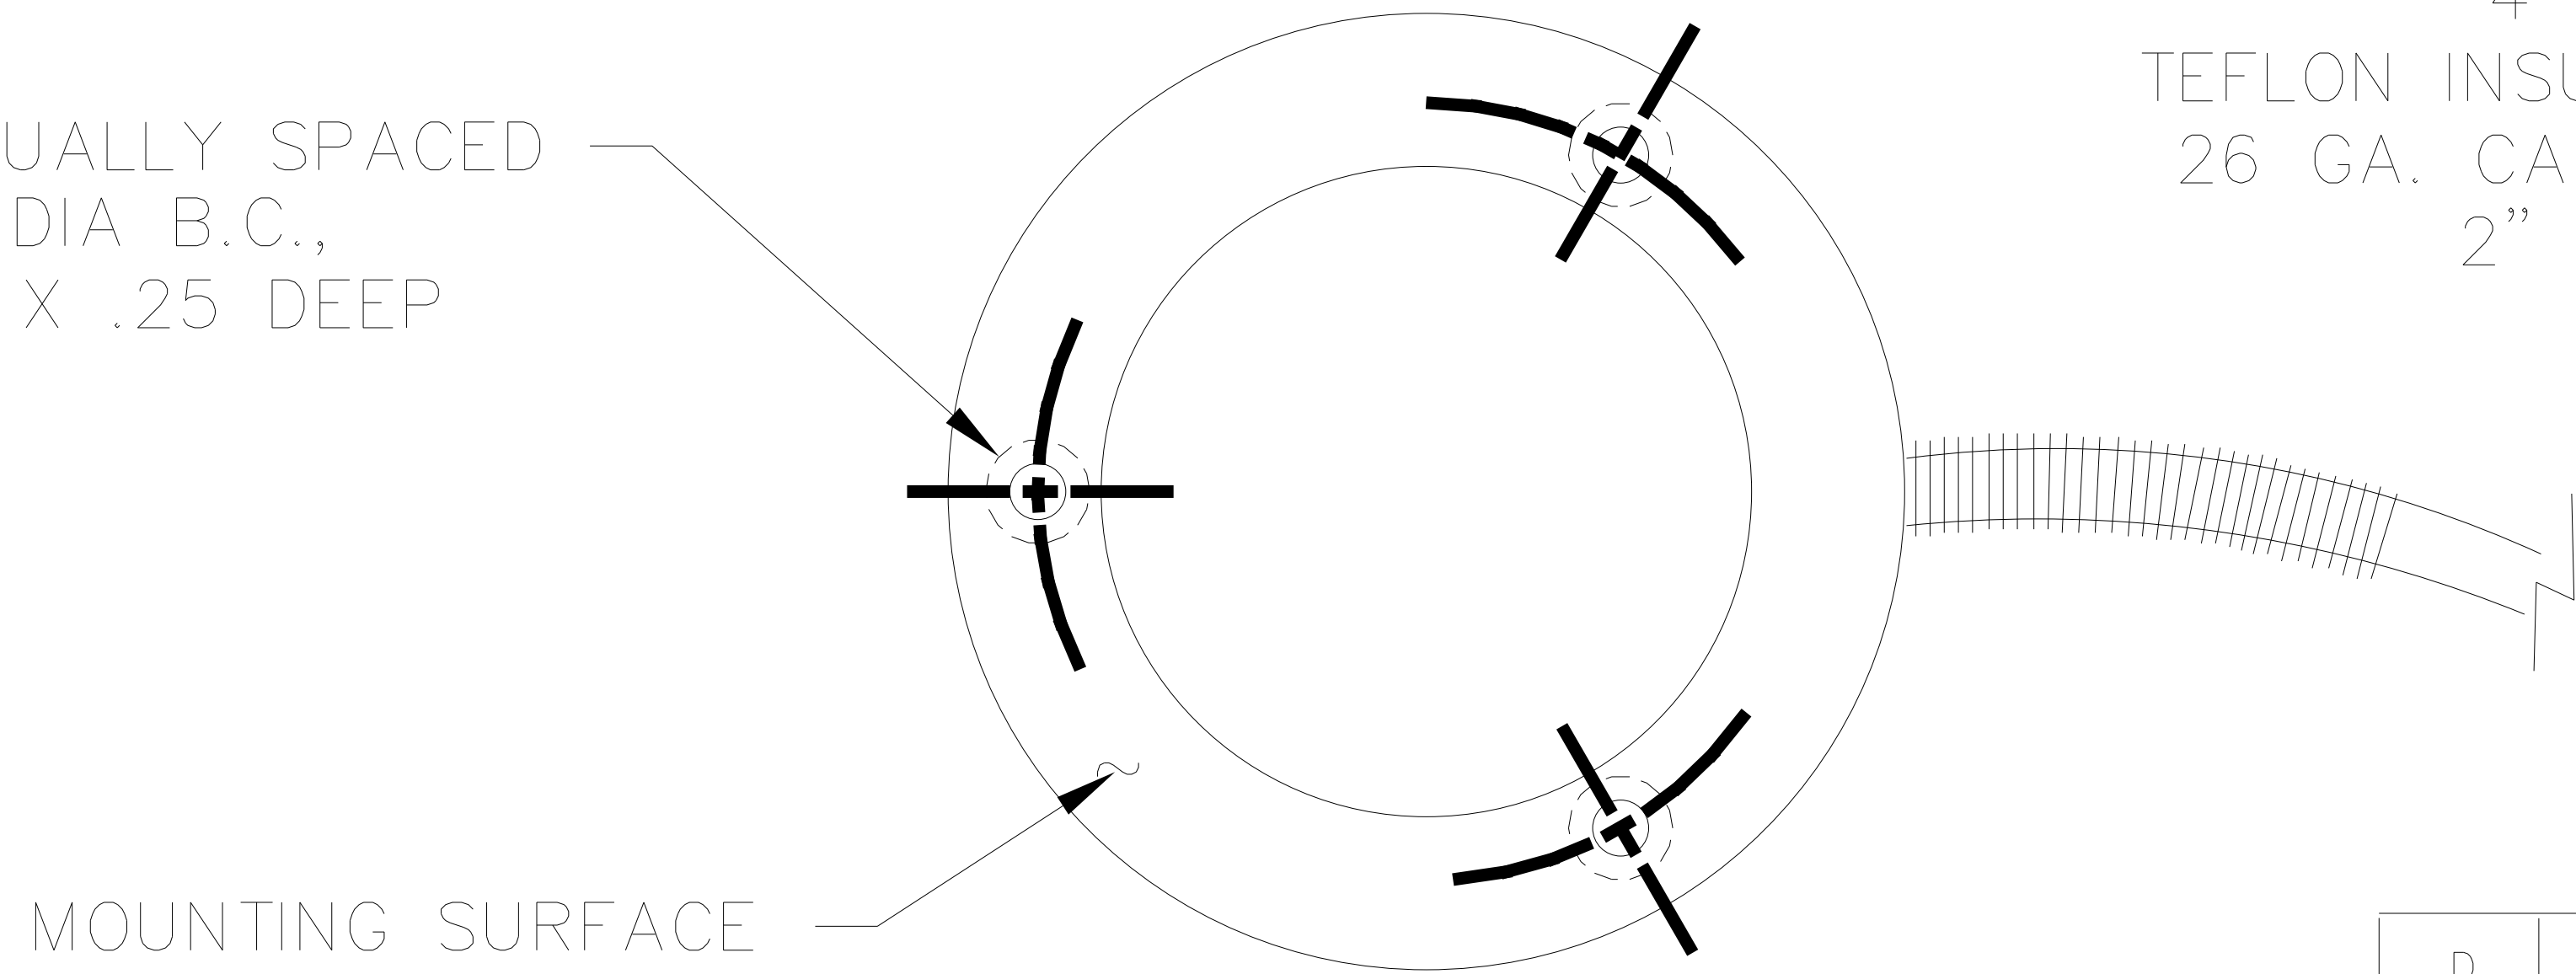

WIRING CODE

4 cond. cable, no amp
RED +EXCITATION
BLACK -EXCITATION
GREEN -OUTPUT
WHITE +OUTPUT

USED ON	P/N 060-0240
MATERIAL SPEC.	.X
	.XX
	.XXX
	✓
	✗

D	REDRAWN & REV. PER ECN # 2727	30DEC89	
REV	DESCRIPTION	REVISOR	APPROV. RELEASE
SCALE:	DRAWN	CHECKED:	APPROVED:
1:1	2/7/78 JB		
<h2>SENSOTEC INC.</h2> <p>1200 CHESAPEAKE AVE. COLUMBUS, OHIO 43212</p>			
<p>MODEL 53 LOAD CELL 0-15,000 LB THRU 0-30000 LB STD PROD</p>			
SHEET 1 OF 1		DOCUMENT NUMBER	
		000-0183-00	