


3 HOLES EQUALLY SPACED ON A 1.00" DIA B.C., #6-32 UNC X .25 DEEP

4 CONDUCTOR, SHIELDED, TEFLON INSULATED, COLOR CODED, 30 GA. CABLE: 5 FT. LONG, WITH 2" SPRING STRAIN RELIEF, (.14" DIA SPRING).

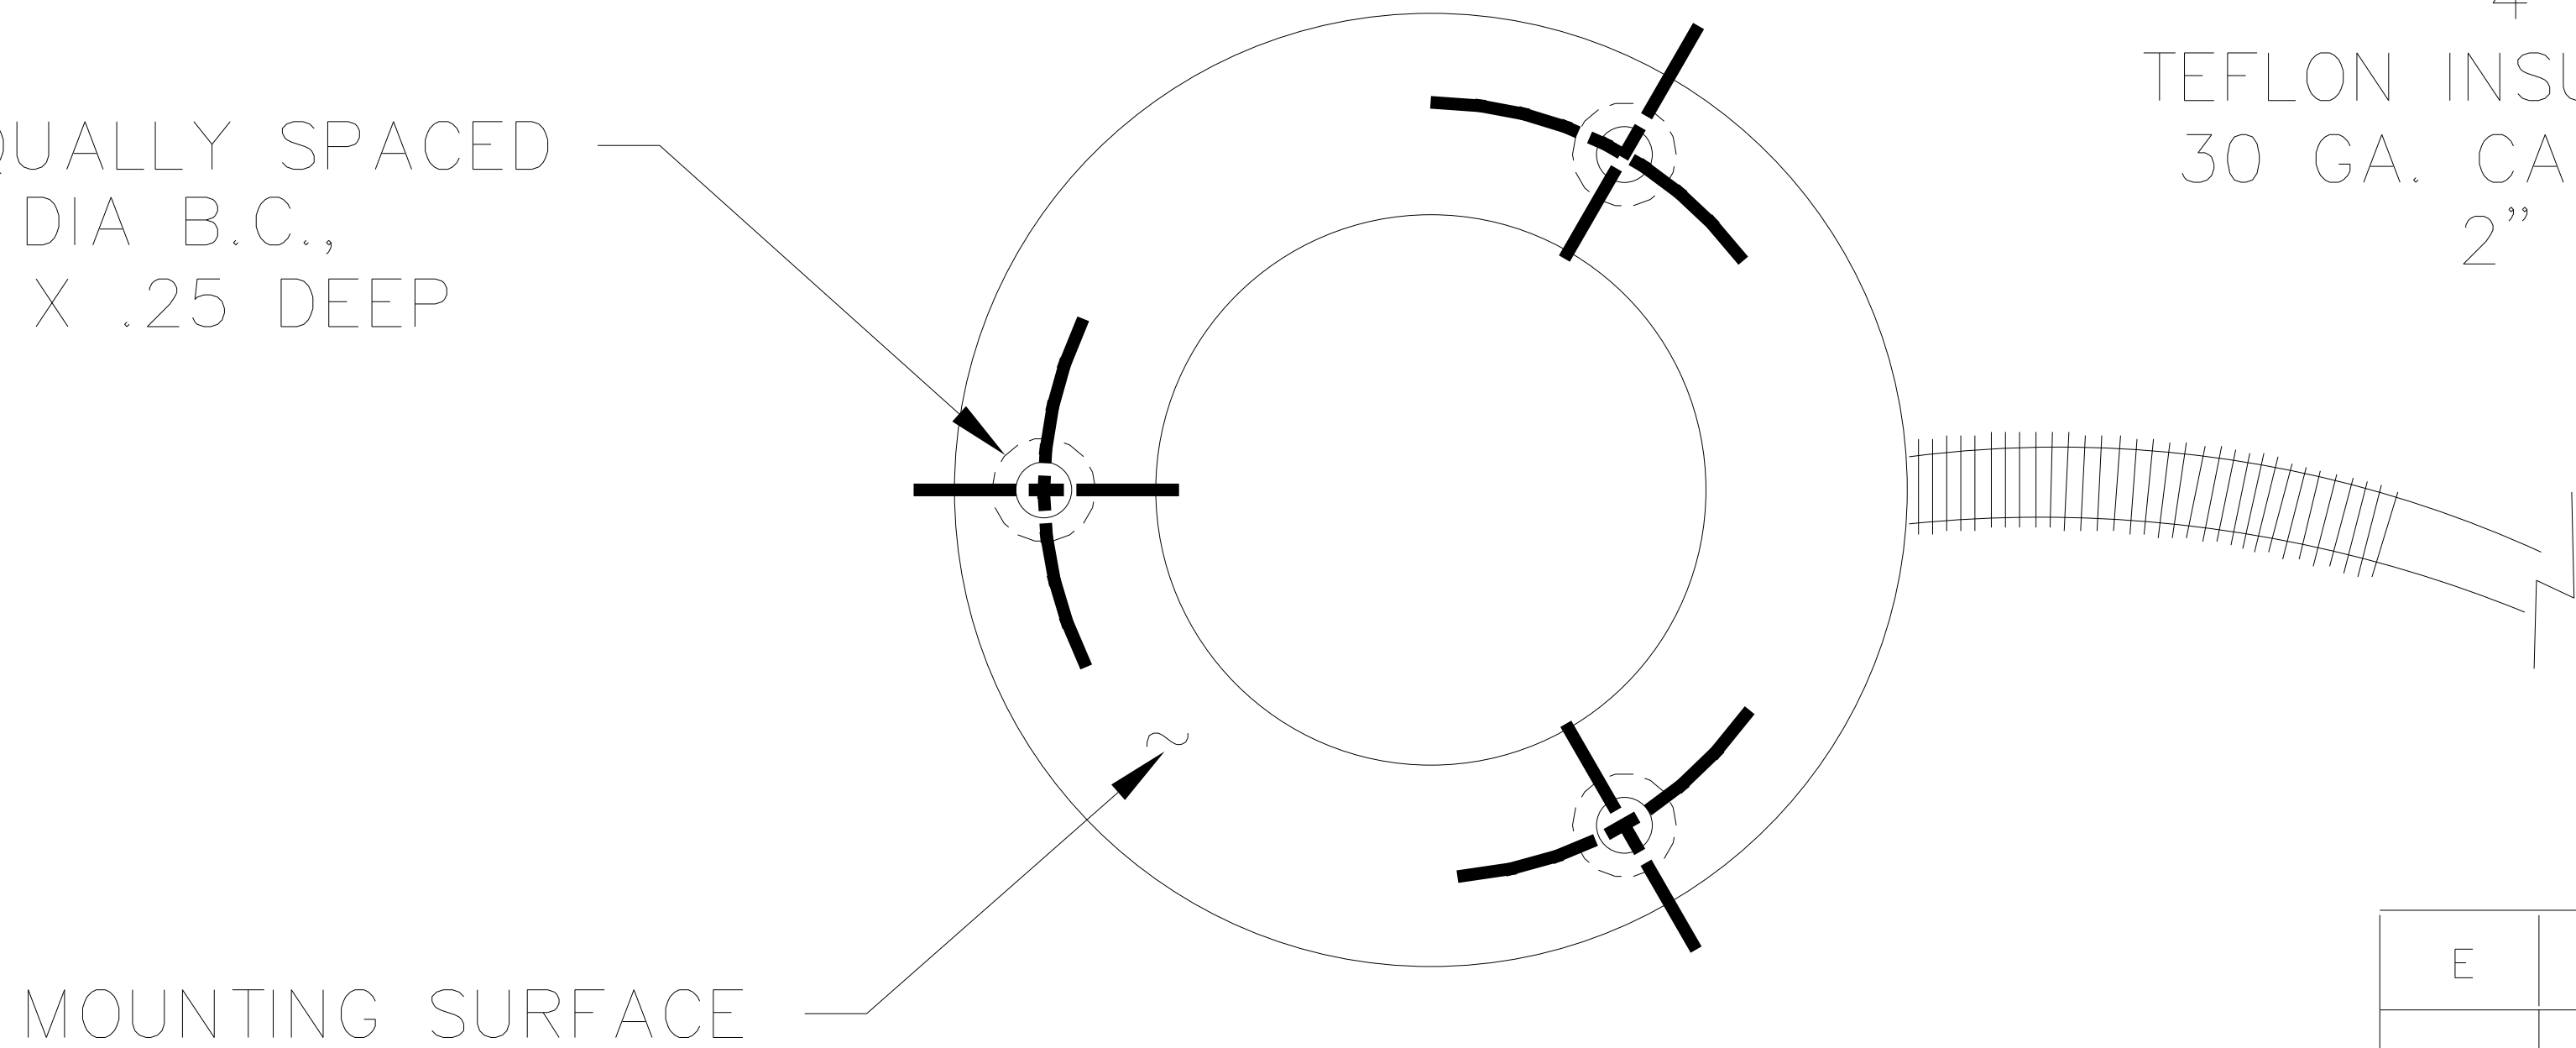

WIRING CODE

4 cond. cable, no amp

RED +EXCITATION

BLACK -EXCITATION

GREEN -OUTPUT

WHITE +OUTPUT

USED ON	P/N 060-0238
MATERIAL SPEC.	.X
	.XX
	.XXX
	✓
	✗

E	REDRAWN & REV. PER ECN # 2727	30DEC89	
REV	DESCRIPTION	REVISOR	APPROV. RELEASE
SCALE: ~	DRAWN 2/7/78 JB	CHECKED:	APPROVED:
<p>SENSOTEC INC.</p> <p>1200 CHESAPEAKE AVE. COLUMBUS, OHIO 43212</p>			
<p>MODEL 53 LOAD CELL</p> <p>0-200 LB THRU 0-2500 LB STD PROD</p>			
SHEET 1 OF 1		DOCUMENT NUMBER	
		000-0371-00	