


⑥ SPECIFICATIONS

CAPACITY: 1000 GMS. THRU 50 LBS.  
 OUTPUT -  
 1000 GMS: 1.5 mV/V NOMINAL  
 5 TO 50 LBS: 2 mV/V NOMINAL  
 EXCITATION: 5 VDC  
 NONLINEARITY/HYSTERESIS (MAX): ±0.25% F.S.  
 COMPENSATED TEMPERATURE: 60°F TO 160°F  
 TEMPERATURE EFFECT:  
 ZERO: .01% F.S./°F  
 SPAN: .02% RDG/°F ©  
 BRIDGE RESISTANCE: 350 OHMS, FOIL  
 MATERIAL: 17-4 STAINLESS STEEL

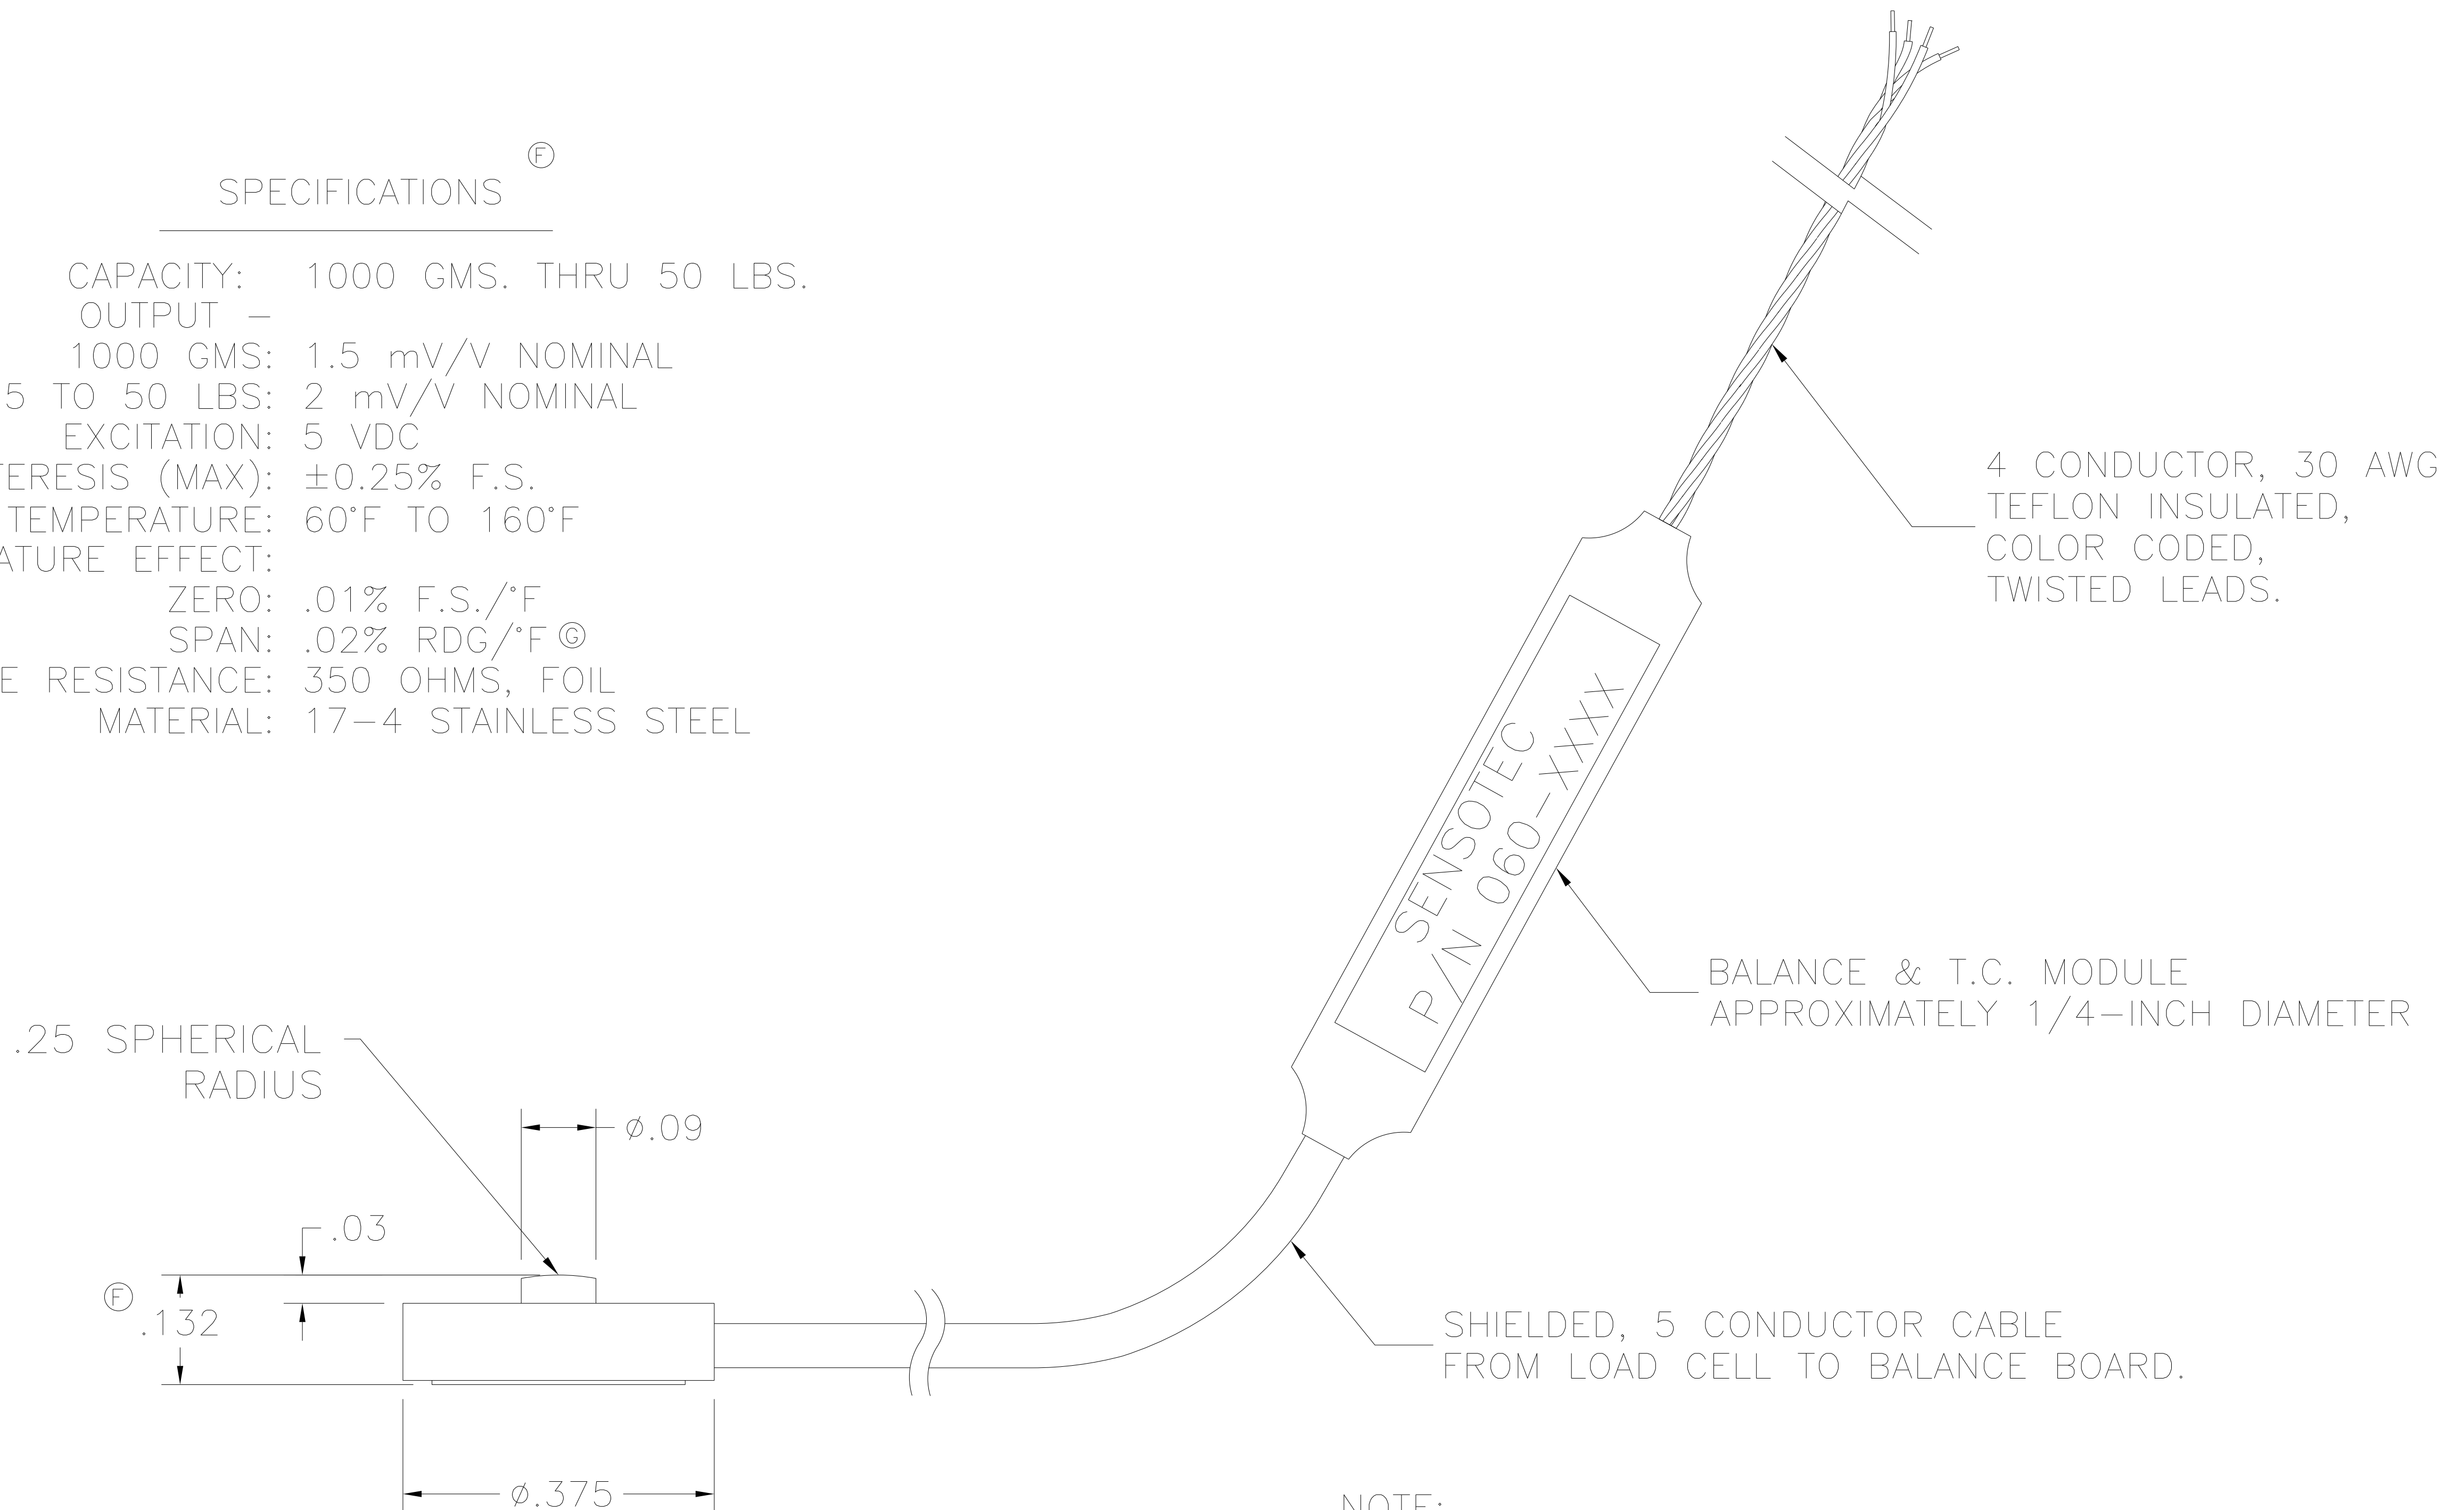

NOTE:  
 CABLE LENGTH AS SPECIFIED PER CUSTOMER.

-20	250 N.
-19	100 LBS.
-17	50 N.
-16	200 N.
-14	100 N.
-13	10 N.
-12	20 N.
-10	5 KG.
-09	75 LBS.
-08	50 LBS.
-07	25 LBS.
-06	10 LBS.
-05	5 LBS.
-04	2,000 GRAMS
-03	1,500 GRAMS
060-2443-02	1,000 GRAMS
SENSOTEC PART NUMBER	AVAILABLE CAPACITY

UNAMPLIFIED  
 COLOR DESIGNATION  
 RED (+)EXCITATION  
 BLACK (-)EXCITATION  
 GREEN (-)OUTPUT  
 WHITE (+)OUTPUT

IF THIS IS A PAPER COPY IT IS UNCONTROLLED. VERIFY REVISION BEFORE USE.

PROPRIETARY RIGHTS NOTICE: THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.

UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS IN INCHES. INTERPRET PER ASME Y14.100-2000 OTHER HONEYWELL STDS MAY APPLY. ALL FILLETS & CORNERS .005R MAX DEBURR & BREAK SHARP CORNERS	G 06/06/2007	07-710: SPAN WAS .01%	JF	SDG	BDR
	F 07/07/98	REDRAWN PER ECN #14	GMH	JHM	
	REV	DESCRIPTION	REV BY	CHK BY	APV BY
	DRW: J.B. 4/17/70	CHK: RAF 07/17/98	MFG: -	ENG: -	
REV E HIST 3016	DO NOT SCALE .X ±.2 .XX ±.02 .XXX ±.010	<b>Honeywell</b> HONEYWELL SENSOTEC 2080 ARLINGATE LANE COLUMBUS, OHIO 43228 www.honeywell.com/sensing			
AUTOCAD		OUTLINE DRAWING MODEL 13, 1000 GMS TO 50 LBS.			
		CODE IDENT NO. 51518	DOCUMENT NUMBER		
		SHEET 1 OF 1	SIZE A	000-0075-00	