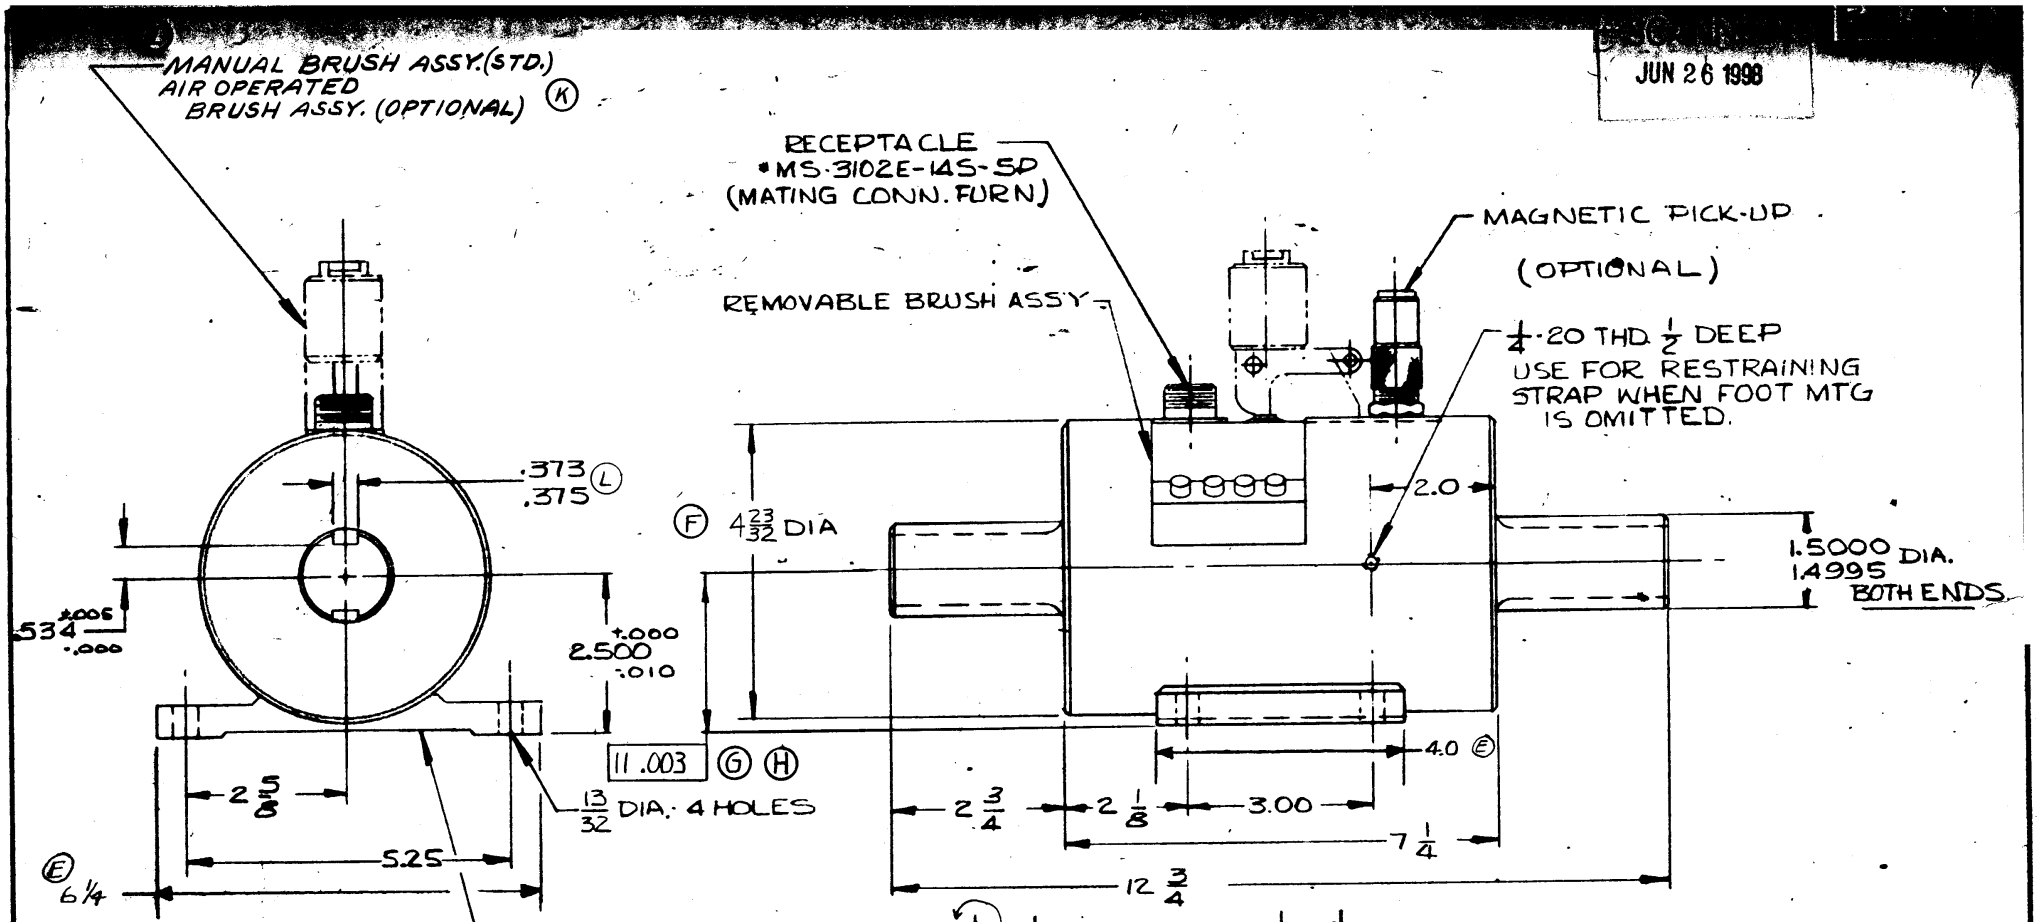

JUN 26 1998

(J) NOTE:
1. SEE DWG. B-1105 FOR SPECIFICATION INFO.

CAP-Y	R.P.M	MODEL	OUTPUT
10,000	8,500	1105-6K	2.0mV/V. NOM
5000	8,500	1105-4K	2.0MV/V. NOM

SYM.	REVISION	DATE
L	.373/.375 WAS .3735/.3755 DCN 5207 cme	7/19/71
K	DELETED FIXED MODIFICATION OPT. ECN 3496 cme	8/24/71
J	ADDED NOTE 1 cme	8-2-83
I	ECN 2976 cme	8-9-81
H	ECN 2702 CORRECTED	LMH 9-14-78
G	ECN 2702 GH	5/8/78
F	WAS 4 3/4 ML.	8/26/77
E	ADDED DIM'S ML.	8/26/77
D	ECN 2209	10-10-73
C	ADDED Output cme	3-4-70
B	ECN 1550	8-4-69
A	REDRAWN	6-13-68

DET. No	PART No	DESCRIPTION	REV'D

O.D. DWG-IN-LINE OR FOOT MOUNTED TORQUE PICK-UP

SCALE: HALF	DRAWN BY: CURTIS	REF. DWG: C-12846	MAT'L:
DATE: 6-13-68	CHK'D BY:	MODEL: 1105	JOB NO.

UNLESS OTHERWISE SPECIFIED:
TOLERANCE ON FRACTIONS ± 1/64
TWO PLACE DECIMALS ± .010
THREE PLACE DECIMALS ± .005
ANGLES ± 0°30'
TOLERANCE ON DRILLED HOLES ± .007 .005
REMOVE ALL BURRS & SHARP EDGES
DIMENSION LIMITS HELD AFTER PLATING
SURFACE FINISH 125

LEBOW ASSOCIATES, INC.
OAK PARK, MICHIGAN

DRAWING NO. B-1105-D

R,S,P,A