




**"NOTICE TO PERSONS RECEIVING THIS DRAWING AND/OR TECHNICAL INFORMATION"**  
 Lebow Products does not warrant the accuracy of the information contained herein. The drawing and/or technical information is based on information for engineering information only and may not be reproduced or used to manufacture anything shown or referred to herein without direct written permission from Lebow Products to the user. The drawing and/or technical information is the property of Lebow Products and is loaned for mutual assistance, to be returned when the purpose has been served.

DO NOT SCALE DRAWING	B-1248-D	REV.
ALL CHANGES TO DRAWING MUST BE DONE ON CAD	 THIRD ANGLE PROJECTION	

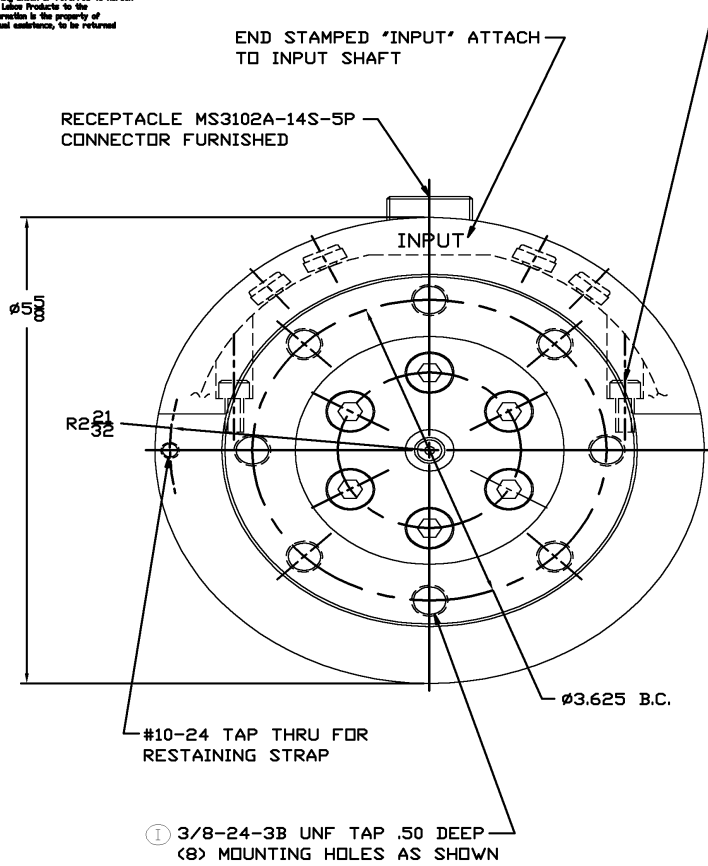

SPLIT HOUSING - REMOVE  
 (4) #8 SCREWS FOR ACCESS TO CLEAN RINGS, ECT. REASSEMBLE PER MATCH MARKS

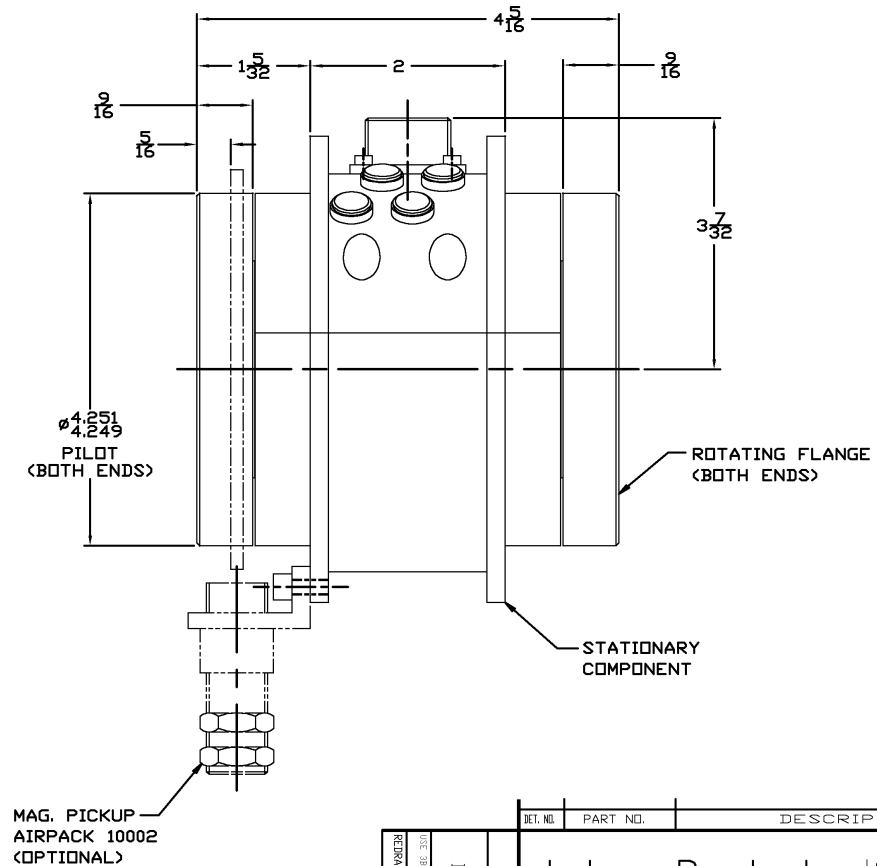

NOTE:  
 1.) IF SOCKET HD. SCR. ARE REMOVED FROM ENDS - LOC-TITE (GRADE A-10) & INSTALL TO TORQUE OF 200 IN LBS. FOR SMALLER CAP SEE B-1228-D. BEND'G MDM (NOTMEAS) IS 1/2 RATED CAPY.

1248-25K	25,000 IN LBS
1248-20K	20,000 IN LBS
1248-15K	15,000 IN LBS
MODEL	CAPACITY

DET. NO.	PART NO.	DESCRIPTION	REV'D.
		<b>Lebow Products</b> Lebow Products Troy, Michigan	
UNLESS OTHERWISE SPECIFIED LINEAR DIMENSIONS ARE IN INCHES REMOVE ALL BURRS & ANGULAR DIMENSIONS ARE IN DEGREES SHARP EDGES DIMENSION LIMITS HELD AFTER PLATING SURFACE FINISH 125 ✓			
TOLERANCES			DR. BY: ENGR.
DRILLED HOLES +0.00 -0.007	TWO PLACE DECIMALS ± .005	THREE PLACE DECIMALS ± .002	DATE: 7/16/66
SCALE: NONE	REF. DWG: B-11042	FRACTIONAL DIMENSIONS ± 1/64	MATL: 1248
TITLE: O.D. DRAWING		DRAWING NO. B-1248-D	REV.

REVISIONS	DESCRIPTION	DATE
CF	CHG'D.	
J I	SYM.	