

## Chlorine Dioxide

### Sensoric ClO<sub>2</sub> 3E 1 O (unfiltered)



# Product Data Sheet

## Sensoric ClO<sub>2</sub> 3E 1 O

### FEATURES

Amperometric 3 electrode sensor cell  
Low susceptibility to abrupt changes of humidity  
Interference to Chlorine  
High selectivity  
0 voltage biased operation

### TYPICAL APPLICATIONS

Pulp & Paper Industry, Water treatment plants, Desinfection  
Portable and fixed point monitoring of TLV levels

### PART NUMBER INFORMATION

MINI	2731-331-30009
SENSORIC CLASSIC	2731-331-30069
CTL 4 series adaptation	2731-331-30049
CTL 7 series adaptation	2731-331-30079

Note:

It is recommended to cross calibrate with 1 –5 ppm chlorine

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## Sensoric ClO<sub>2</sub> 3E 1 O

### TECHNICAL SPECIFICATIONS

Measuring Range	0–1 ppm
Sensitivity Range	600 nA/ppm ± 200 nA/ppm (negative signal)
Zero Current at 20 °C	< ± 15 nA
Resolution at 20 °C	< 0.03 ppm
Bias Potential	0 mV
Linearity	< 10% full scale
Response Time at 20 °C	
t <sub>50</sub>	< 20 s calculated from 4 min. exposure time
t <sub>90</sub>	< 120 s (typically < 60 s), calculated from 4 min. exposure
Long Term Sensitivity Drift	<10% per 6 months
Operation Conditions	
Temperature Range	-20 °C to +40 °C
Humidity Range	15–90% r.H, non–condensing
Effect of Humidity	no effect
Sensor Life Expectancy	> 24 months in air
Warranty	12 months


Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## Sensoric ClO2 3E 1 O

**OUTPUT vs. TEMPERATURE:**  
(calibration has been done using 1 ppm Cl2 instead of ClO2)

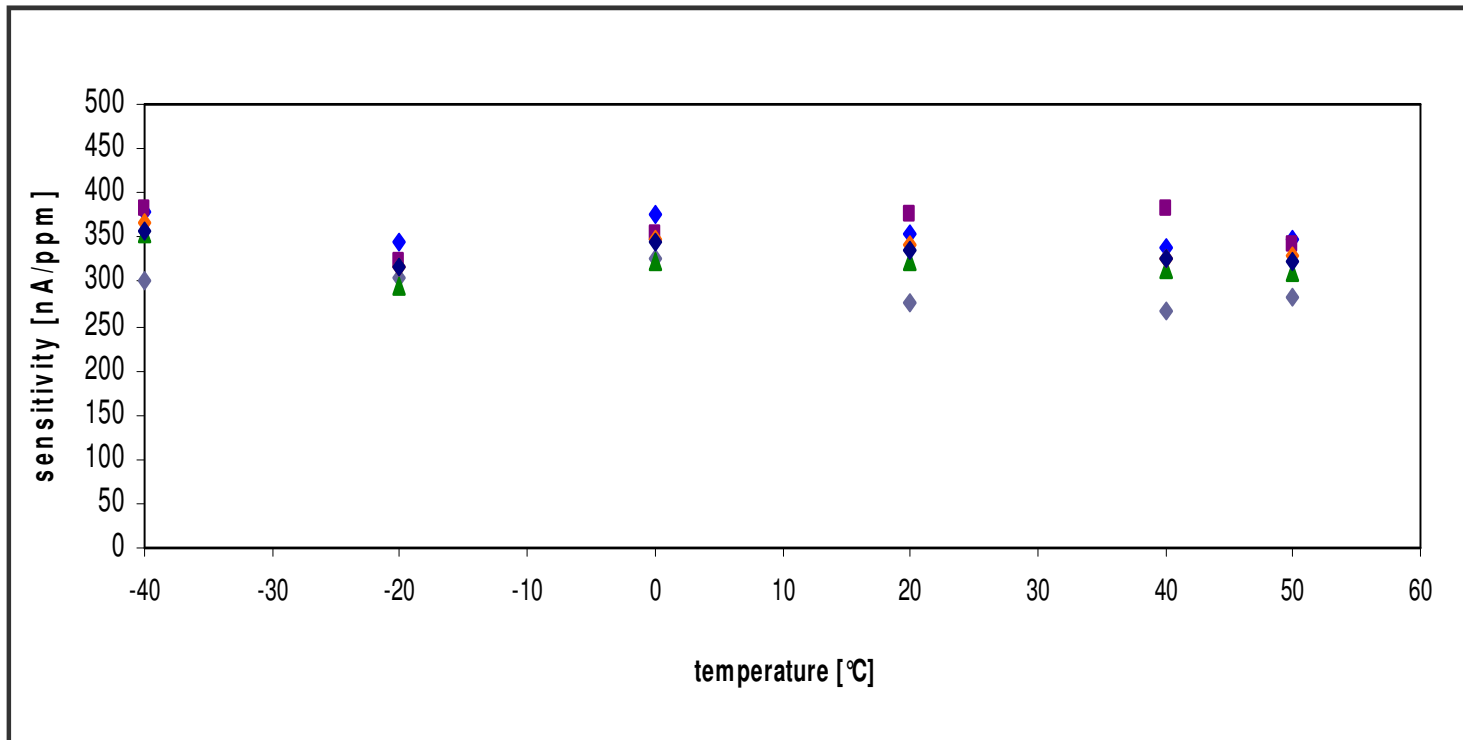


Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## Sensoric ClO2 3E 1 O

**ZERO READING vs. TEMPERATURE:**  
(calibration has been done using 1 ppm Cl2 instead of ClO2)

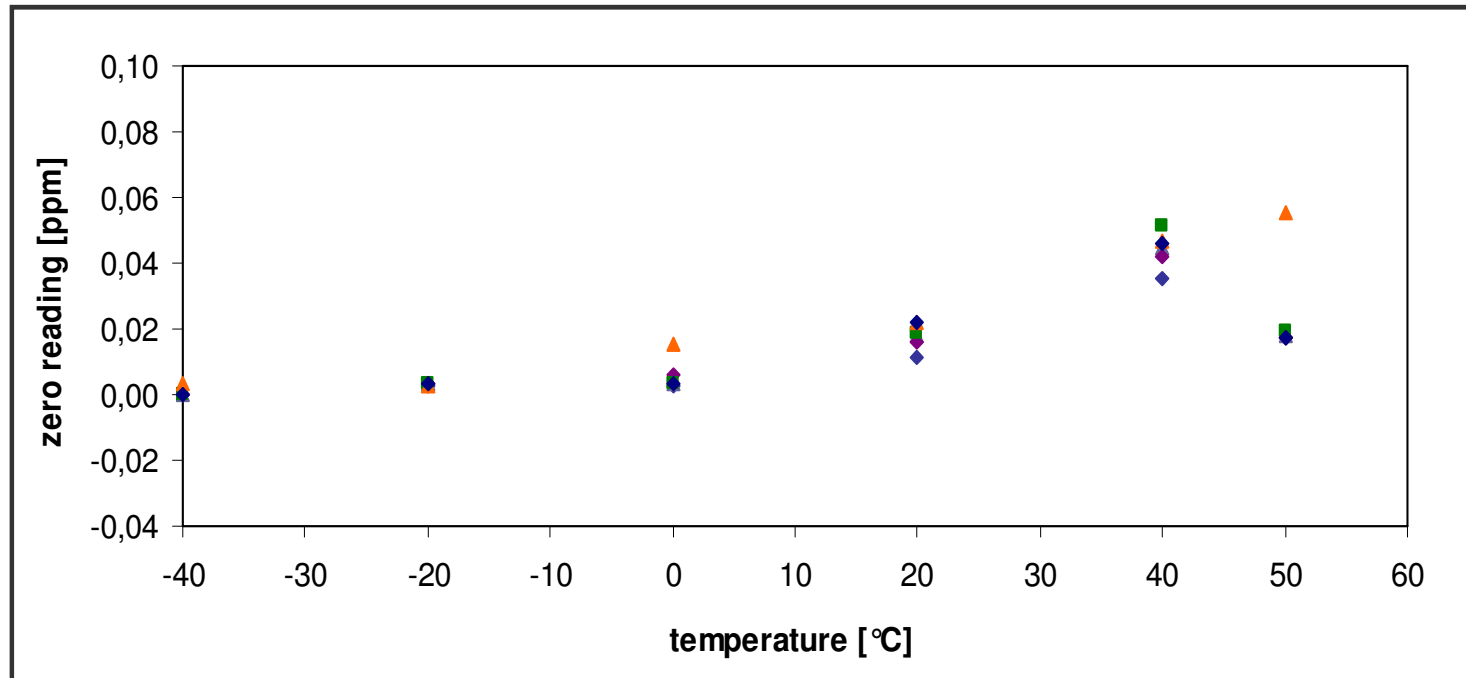

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## Sensoric ClO<sub>2</sub> 3E 1 O

### CROSS SENSITIVITIES AT 20 °C

Gas	Concentration	Reading [ppm]
Alcohols	1000 ppm	0
Carbon Monoxide	100 ppm	0
Chlorine	1 ppm	0.6
Ozone	0.25 ppm	0.7
Hydrogen	3000 ppm	0
Hydrogen Sulfide	20 ppm	-5

#### Notes:

1. Interference factors may differ from sensor to sensor and with life time.
2. This table does not claim to be complete. The sensor might also be sensitive to other gases.
3. It is recommended to use 1 – 5 ppm Cl<sub>2</sub> for cross calibration.

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## Safety Note

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

## Attention

Use of the Sensoric range sensors requires complete understanding of the instructions. Before using Sensoric range sensors please carefully read 'Application Notes' which can be found at [www.citytech.com](http://www.citytech.com) under the heading 'Support' -> 'Application Notes' -> 'Sensoric'

Product Safety Data Sheets (PSDS) can be obtained at [www.citytech.com](http://www.citytech.com) under the heading 'Support' -> 'Product Safety Datasheets'

For further assistance on sensor selection and use, please contact a member of the Technical Sales team.

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

