

HEAVY DUTY PRESSURE TRANSDUCERS FOR POTENTIAL USE IN INDUSTRIAL HVAC/R APPLICATIONS

MIP SERIES

Application Note

Heating, ventilation, air conditioning and refrigeration (HVAC/R) systems help maintain an acceptable indoor environment. The three components of an HVAC/R system are:


1. **Heating:** The process of bringing heat to an area. A heating system uses a boiler, furnace, or heat pump to heat water, steam, or air for distribution to a specific area or areas.
2. **Ventilation:** The process of changing air in a specific area to change the temperature and improve the air quality by removing moisture, dust, smoke, and other airborne particles.
3. **Air Conditioning and Refrigeration:** Heat can be removed by absorbing and discharging heat through the use of a refrigeration cycle.

Due to the high cost of energy, the HVAC/R systems shown in Figure 1 need to be efficient. Controlling the compressor suction and discharge pressure to match refrigeration needs helps to increase efficiency and reduce energy costs.

The MIP Series offers a media-isolated pressure transducer in a compact, stainless steel construction for use with a wide range of media including corrosive fluids and water. The hermetically-welded design supports almost any media without the use of an internal seal. The transducers are designed to be used in harsh environments that see aggressive media.

See Table 1 for a list of compatible media.

FIGURE 1. MIP SERIES HEAVY DUTY, MEDIA-ISOLATED PRESSURE TRANSDUCERS IN POTENTIAL HVAC/R APPLICATIONS

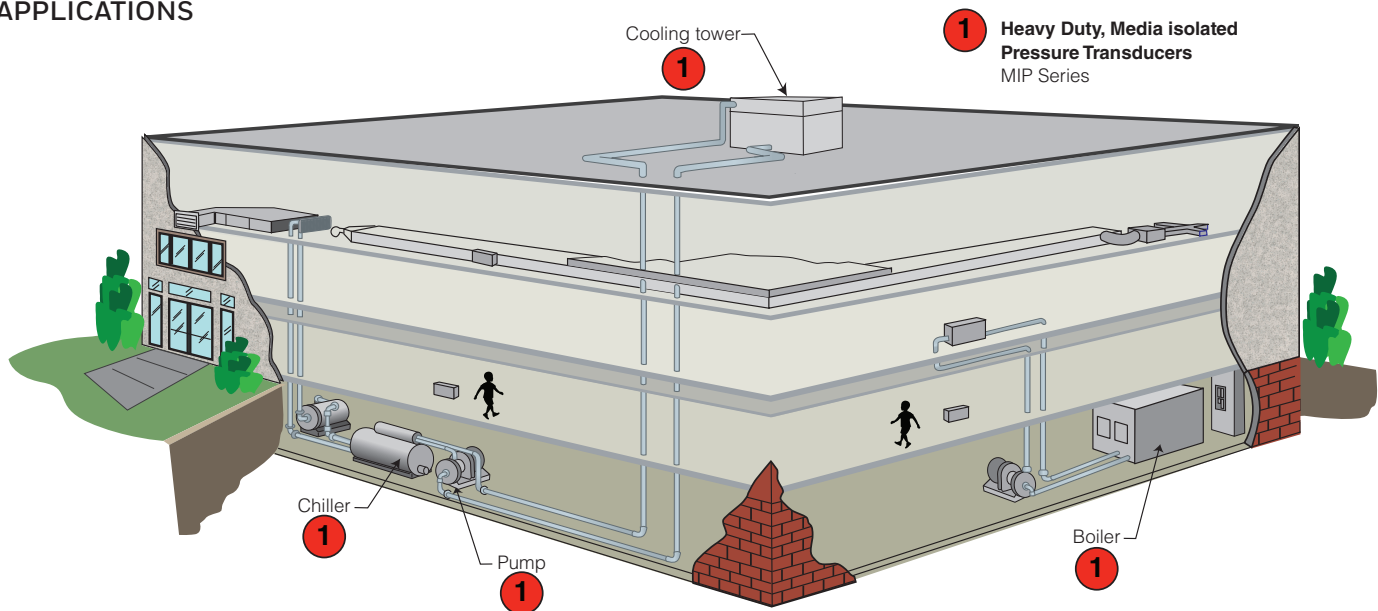

Honeywell

TABLE 1: MIP SERIES SPECIFICATIONS

CHARACTERISTIC	PARAMETER
Operating, compensated, and storage temperature range	-40°C to 125°C [-40°F to 257°F]
Total Error Band	-40°C to 125°C [-40°F to 257°F]: <ul style="list-style-type: none"> • ±1.0 %FSS (≤10 bar) • ±0.75 %FSS (>10 bar)
Pressure range	<ul style="list-style-type: none"> • 1 bar to 60 bar • 15 psi to 870 psi
Pressure reference	<ul style="list-style-type: none"> • absolute • sealed gage
Pressure port material	stainless steel 304L
Output transfer function	ratiometric to 5 Vdc supply: 0.5 Vdc to 4.5 Vdc
EMC (radiated immunity)	100 V/m (200 MHz to 2 GHz) per ISO 11452-2
Ingress protection	IP67 (Metri-Pack 150)
External freeze/thaw resistance	>6 cycles from -30°C to 50°C [-22°F to 122°F]
Media compatibility	<ul style="list-style-type: none"> • Industrial: <ul style="list-style-type: none"> - pumps: water, hydraulic fluids - compressors: compressed air - process: food, beverage, oil, gas, steam • HVAC/R: refrigerants (butane, propane, ammonia, CO₂, R134A, R407C, R410A, R448A/Solstice® N40, R32 and R1234ze, R1234yf, glycol + water • Transportation: gasoline, diesel fuel, engine oil, brake fluid, coolants, CNG • Medical: O₂, N₂, CO₂, N₂O, air



WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell’s standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgement or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective. **The foregoing is buyer’s sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer’s sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

FOR MORE INFORMATION

Honeywell Sensing and Internet of Things services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or the nearest Authorized Distributor, visit sensing.honeywell.com or call:

- Asia Pacific +65 6355-2828
- Europe +44 1698 481481
- USA/Canada +1-302-613-4491

Solstice® N40 is a registered trademark of Honeywell International Inc.

Honeywell Sensing and Internet of Things

9680 Old Bailes Road
 Fort Mill, SC 29707
honeywell.com

008255-7-EN | 7 | 01/20
 © 2020 Honeywell International Inc. All rights reserved.

**THE
 FUTURE
 IS
 WHAT
 WE
 MAKE IT**

