

## Microstructure Pressure Sensors

Precision Compensated

0 in H<sub>2</sub>O to 4 in H<sub>2</sub>O and 0 in H<sub>2</sub>O to 10 in H<sub>2</sub>O

*SCXL Series*

### FEATURES

- Very Low Pressure Resolution
- Precision Temperature Compensation
- Small Size
- Low Noise
- Calibrated Zero & Span
- High Impedance for Low Power Applications

### TYPICAL APPLICATIONS

- Air Flow
- Respirators
- HVAC
- Medical Equipment
- Computer Peripherals
- Pneumatic Controls



The SCXL series sensors provide a very cost-effective solution for pressure applications that require high accuracy over very low operating pressure ranges. These internally calibrated and temperature compensated sensors were specifically designed to provide an accurate and stable output over a 0 °C to 50 °C [32 °F to 122 °F] temperature range. This series is intended for use with non-corrosive, non-ionic working fluids such as air, dry gases and the like.

The output of the bridge is ratiometric to the supply voltage. Operation from any dc supply voltage up to 18 Vdc [Model SCXL004DN] or 20 Vdc [SCXL010DN] is acceptable.

Contact your local honeywell representative or go to Honeywell's website at [www.honeywell.com/sensing](http://www.honeywell.com/sensing) for additional details.

### **⚠ WARNING**

#### **PERSONAL INJURY**

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

**Failure to comply with these instructions could result in death or serious injury.**

### **⚠ WARNING**

#### **MISUSE OF DOCUMENTATION**

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

**Failure to comply with these instructions could result in death or serious injury.**

# Microstructure Pressure Sensors

Precision Compensated

0 in H<sub>2</sub>O to 4 in H<sub>2</sub>O and 0 in H<sub>2</sub>O to 10 in H<sub>2</sub>O

*SCXL Series*

## GENERAL SPECIFICATIONS

Characteristic	Description (Maximum Ratings)	Description (Maximum Ratings)
	SCXL004DN	SCXL010DN
Supply Voltage (Vs)	18 Vdc	20 Vdc
Common Mode Pressure	150 in H <sub>2</sub> O	50 psig
Lead Soldering Temperature (2 seconds to 4 seconds)	250 °C [482 °F]	250 °C [482 °F]
Proof Pressure <sup>(12)</sup>	10 in H <sub>2</sub> O	10 psi
Burst Pressure	5 psi	200 in H <sub>2</sub> O

## ENVIRONMENTAL SPECIFICATIONS

Characteristic	Description (Maximum Ratings)	Description (Maximum Ratings)
	SCXL004DN	SCXL010DN
Compensated Operating Temperature	0 °C to 50 °C [32 °F to 122 °F]	0 °C to 50 °C [32 °F to 122 °F]
Operating Temperature	0 °C to 70 °C [32 °F to 158 °F]	-40 °C to 85 °C [-40 °F to 185 °F]
Storage Temperature	0 °C to 70 °C [32 °F to 158 °F]	-40 °C to 125 °C [-40 °F to 257 °F]
Humidity Limits	0 % to 100 % RH	0 % to 100 % RH

## PRESSURE RANGE SPECIFICATIONS

Listing	Operating Pressure	Proof Pressure <sup>(2)</sup>	Full-Scale Span <sup>(1)</sup>		
			Min.	Typ.	Max.
SCXL004DN	0 in H <sub>2</sub> O to 4 in H <sub>2</sub> O	10 in H <sub>2</sub> O	38.0 mV	40.0 mV	42.0 mV
SCXL010DN	0 in H <sub>2</sub> O to 10 in H <sub>2</sub> O	10 psi	19.5 mV	20.0 mV	20.5 mV

## SCXL004DN PERFORMANCE CHARACTERISTICS <sup>(3)</sup>

Characteristic	Min.	Typ.	Max.	Unit
Zero Pressure Offset <sup>(4)</sup>	-1.5	0	1.5	mV
Sensitivity	–	10	–	mV/in H <sub>2</sub> O
Combined Pressure Non-Linearity and Pressure Hysteresis <sup>(5)</sup>	–	±0.5	±1.0	% FSS
Temperature Effect on Span 0 °C to 50 °C [32 °F to 122 °F] <sup>(6)</sup>	–	±0.2	±1.0	% FSS
Temperature Effect on Offset 0 °C to 50 °C [32 °F to 122 °F] <sup>(6)</sup>	–	±0.5	±2.0	mV
Repeatability <sup>(7)</sup>	–	±0.2	–	% FSS
Input Resistance <sup>(8)</sup>	–	4.0	–	kOhm
Output Resistance <sup>(9)</sup>	–	4.0	–	kOhm
Common Mode Voltage <sup>(10)</sup>	5.7	6.0	6.3	Vdc
Response Time <sup>(11)</sup>	–	500	–	Microsec.
Long Term Stability of Offset and Span <sup>(12)</sup>	–	±0.5	–	% FSS
Position Sensitivity	–	0.25	–	mV/g

# Microstructure Pressure Sensors

Precision Compensated

0 in H<sub>2</sub>O to 4 in H<sub>2</sub>O and 0 in H<sub>2</sub>O to 10 in H<sub>2</sub>O

SCXL Series

## SCXL010DN PERFORMANCE CHARACTERISTICS <sup>(3)</sup>

Characteristic	Min.	Typ.	Max.	Unit
Zero Pressure Offset <sup>(4)</sup>	-0.3	0.0	0.3	mV
Sensitivity	-	2	-	mV/in H <sub>2</sub> O
Combined Pressure Non-Linearity and Pressure Hysteresis <sup>(5)</sup>	-	±0.2	±0.5	% FSS
Temperature Effect on Span 0 °C to 50 °C [32 °F to 122 °F] <sup>(6)</sup>	-	±0.2	±1.0	% FSS
Temperature Effect on Offset 0 °C to 50 °C [32 °F to 122 °F] <sup>(6)</sup>	-	±300	±500	Microvolts
Repeatability <sup>(7)</sup>	-	±0.2	±0.5	% FSS
Input Resistance <sup>(8)</sup>	-	4.0	-	kOhm
Output Resistance <sup>(9)</sup>	-	4.0	-	kOhm
Common Mode Voltage <sup>(10)</sup>	5.8	6.0	6.2	Vdc
Response Time <sup>(11)</sup>	-	100	-	Microsec.
Long Term Stability of Offset and Span <sup>(12)</sup>	-	100	-	Microvolts

## SPECIFICATION NOTES


- Note 1: Full-Scale Span is the algebraic difference between the output voltage at full-scale pressure and the output at zero pressure. Full-Scale Span is ratiometric to the supply voltage.
- Note 2: Proof pressure is the pressure above which devices will not return to guaranteed specifications.
- Note 3: Reference Conditions: (Unless otherwise noted)  
 $T_A = 25\text{ °C}$ , Supply  $V_s = 12\text{ Vdc}$ , Common Mode Line pressure = 0 psig, Pressure applied to Port B. For absolute devices only, pressure is applied to Port A, and the output polarity is reversed.
- Note 4: Zero pressure effect is measured with pins pointed towards the ground. Offset can be position sensitive.
- Note 5: Pressure Hysteresis – the maximum output difference at any point within the operating pressure range for increasing and decreasing pressure.
- Note 6: Maximum error band of the offset voltage and the error band of the span, relative to the 25 °C [77 °F] reading.
- Note 7: Maximum difference in output at any pressure within the operating pressure range and the temperature within 0 °C to 50 °C [32 °F to 122 °F] after:  
 004DN: a) 100 temperature cycles, 0 °C to 50 °C [32 °F to 122 °F]  
           b) 1 million pressure cycles, 0 psi to Full-Scale Span.  
 010DN: a) 1,000 temperature cycles, 0 °C to 50 °C [32 °F to 122 °F]  
           b) 1.5 million pressure cycles, 0 psi to Full-Scale Span.
- Note 8: Input resistance is the resistance between pins 2 and 4.
- Note 9: Output resistance is the resistance between pins 3 and 5.
- Note 10: Common Mode voltage of the output arms (Pins 3 and 5) for  $V_s=12\text{ Vdc}$ .
- Note 11: Response time for a 0 psi to Full-Scale Span pressure step change, 10 % to 90 % rise time.
- Note 12: Long term stability over a one-year period.

## ORDERING INFORMATION

Description	Part Number
0 in H <sub>2</sub> O to 4 in H <sub>2</sub> O	SCXL 004DN
0 in H <sub>2</sub> O to 10 in H <sub>2</sub> O	SCXL 010DN

Special Options: Pins with N-90 = 90° Lead Bend

## ELECTRICAL CONNECTION

Pinout	SCXL004DN [0 in H <sub>2</sub> O to 4 in H <sub>2</sub> O]	SCXL010DN [0 in H <sub>2</sub> O to 10 in H <sub>2</sub> O]
	PIN 1) Temperature output (+) PIN 2) $V_s$ PIN 3) + Output PIN 4) Ground PIN 5) - Output PIN 6) Temperature output (-)	PIN 1) No Connection PIN 2) $V_s$ PIN 3) + Output PIN 4) Ground PIN 5) - Output PIN 6) No Connection


# Microstructure Pressure Sensors

Precision Compensated

0 in H<sub>2</sub>O to 4 in H<sub>2</sub>O and 0 in H<sub>2</sub>O to 10 in H<sub>2</sub>O

*SCXL Series*

## PHYSICAL DIMENSIONS for Reference Only-(mm/in)

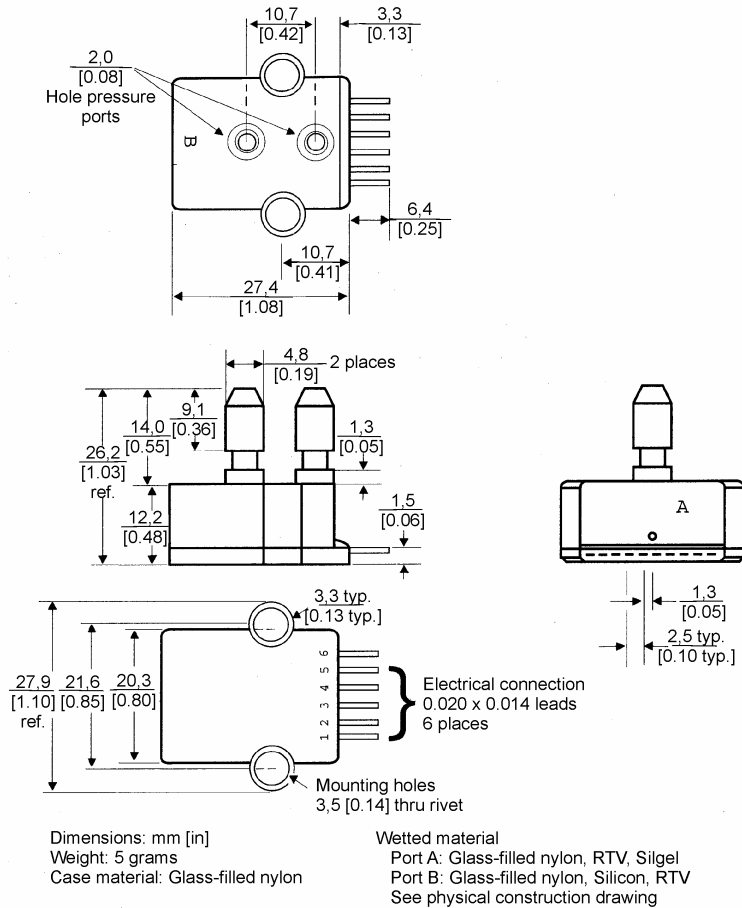

## WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship. Contact your local sales office for warranty information. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace without charge those items it finds defective. **The foregoing is Buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose.**

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this printing. However, we assume no responsibility for its use.

While we provide application assistance personally, through our literature and the Honeywell web site, it is up to the customer to determine the suitability of the product in the application.

For application assistance, current specifications, or name of the nearest Authorized Distributor, contact a nearby sales office. Or call:

1-800-537-6945 USA/Canada

1-815-235-6847 International

**FAX**

1-815-235-6545 USA

**INTERNET**

[www.honeywell.com/sensing](http://www.honeywell.com/sensing)

[info.sc@honeywell.com](mailto:info.sc@honeywell.com)

**Honeywell**

Sensing and Control

[www.honeywell.com/sensing](http://www.honeywell.com/sensing)

Honeywell

11 West Spring Street

Freeport, Illinois 61032