


B-18576


NAMEPLATE (1) A-13634

B & 12 RING ASS'Y

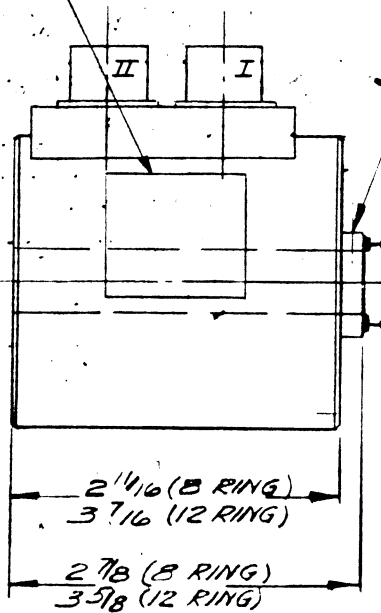

(D) \*4 #40 x 1/4 LG. CUP PT. SET SCR. 2 PLACES -90° APART


4 RING ASS'Y

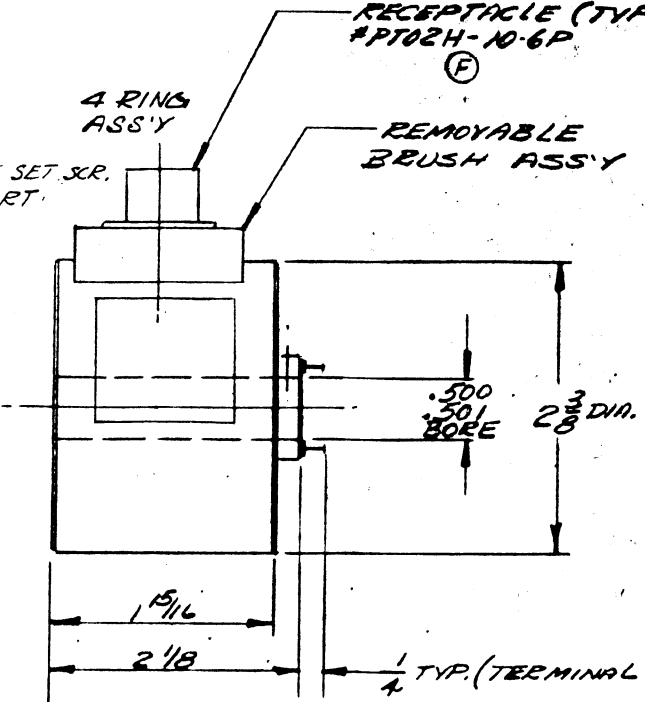

RECEPTACLE (TYP) #PT02H-10-6P

REMOVABLE BRUSH ASS'Y

\*4-40 UNC TAP 1/2 DIA  
4 HOLES EQ. SPACED IN  
2.125 DIA. B. C. BOTH ENDS  
(USED AT TERMINAL END FOR OVER MTS)

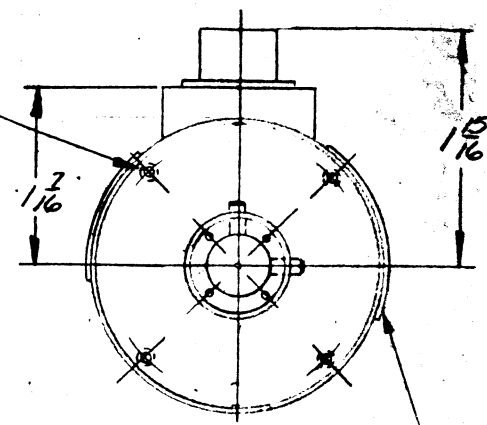

WARNING LABEL (1) A-30439

12 RING

8 RING

4 RING

SHAFT PIN #	RECEPT. # PIN LETTER	SHAFT PIN #	RECEPT. # PIN LETTER	SHAFT PIN	RECEPT. PIN
1	A	1	A	1	B
2	B	2	B	2	C
3	C	3	C	3	A
4	D	4	D	4	D
5	E				
6	F				
7	A	5	A		
8	B	6	B		
9	C	7	C		
10	D	8	D		
11	E				
12	F				

MAX. SPEED ~ 8000 R.P.M.

DET. No		PART No		DESCRIPTION		REQ'D
		G		NAMEPLATE & WARNING LABEL NOT SHOWN ECN 3407		3/19/82
INSTALLATION DWG ~ SLIP RING ASS'Y						
SCALE: FULL		DRAWN BY: [Signature]		REF. DWG: B-18575		MAT'L: [Blank]
DATE: 6-9-72		CHK'D BY: [Signature]		MODEL: B18-111		JOB NO. [Blank]
UNLESS OTHERWISE SPECIFIED:						
TOLERANCE ON FRACTIONS ± 1/64		TOLERANCE ON DRILLED HOLES ± .007		TWO PLACE DECIMALS ± .010		REMOVE ALL BURRS & SHARP EDGES
THREE PLACE DECIMALS ± .005		DIMENSION LIMITS HELD AFTER PLATING		SURFACE FINISH 125 ✓		
ANGLES: 0°		LEBOW ASSOCIATES, INC.		TROY, MICHIGAN		DRAWING NO. B-18576
SYM.	REVISION	DATE				

SCANNED  
12/11/2017