

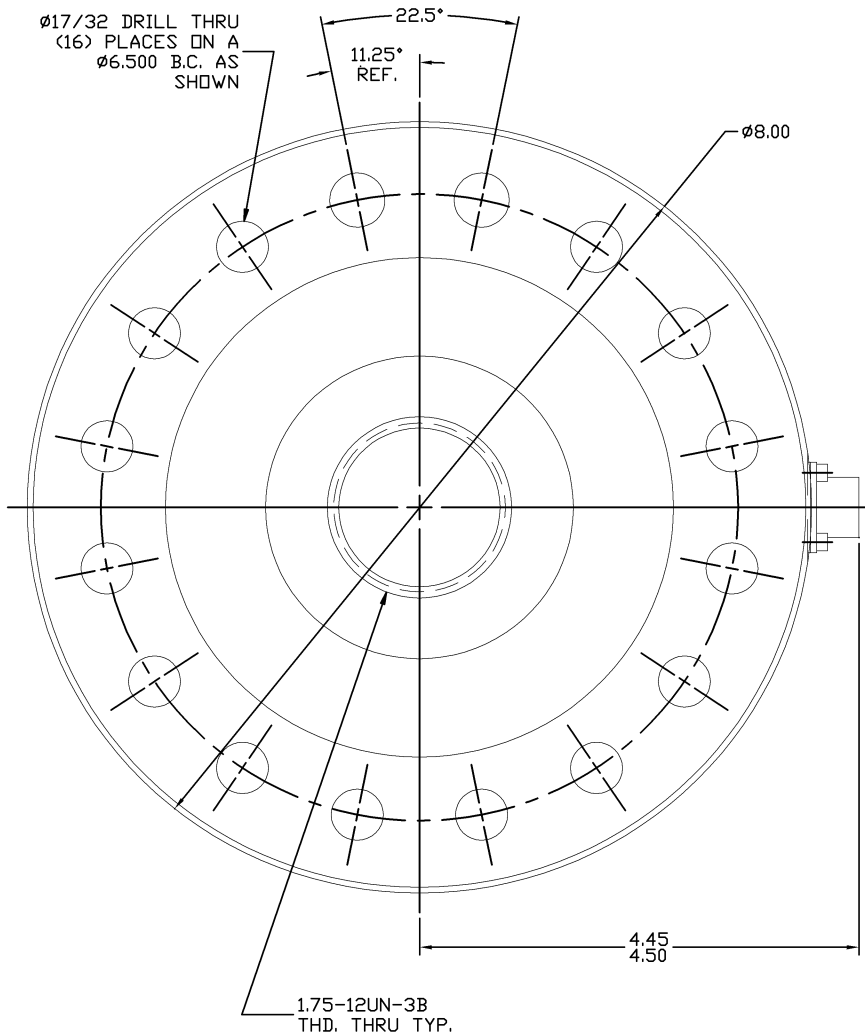


**\*NOTICE TO PERSONS RECEIVING THIS DRAWING AND/OR TECHNICAL INFORMATION\***  
 Lebow Products claims proprietary rights to the material disclosed herein. This drawing and/or technical information is issued in confidence for engineering information only and may not be reproduced or used to manufacture anything shown or referred to herein without direct written permission from Lebow Products to the user. This drawing and/or technical information is the property of Lebow Products and is loaned for mutual assistance, to be returned when its purpose has been served.

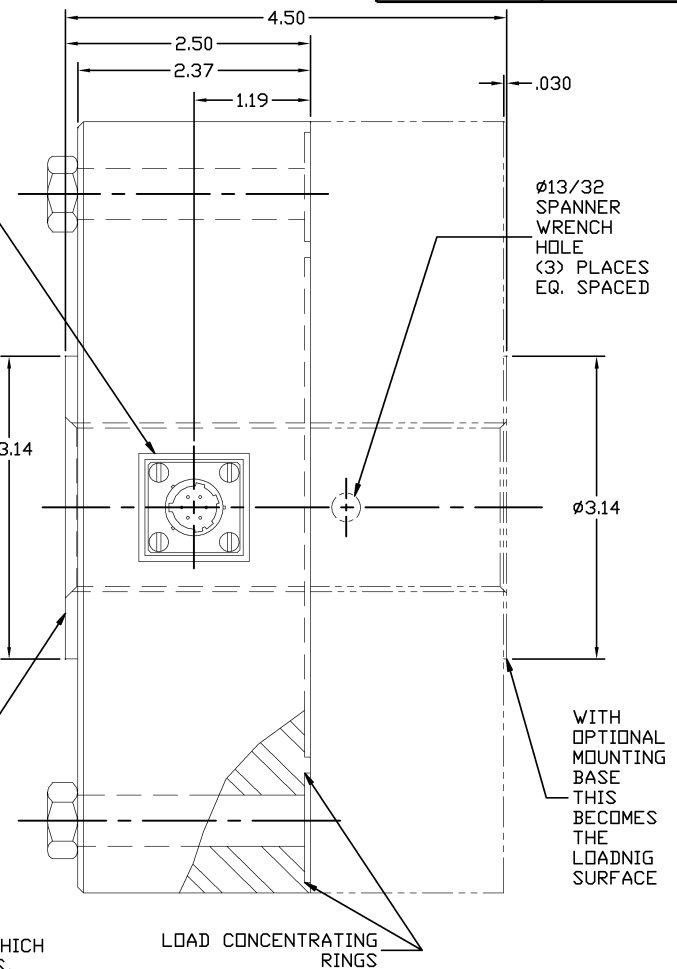

RECEPTACLE: #PT02E-10-6P (MATING CONNECTOR FURNISHED)

OPTIONAL LOAD BUTTON (COMPRESSION ONLY)

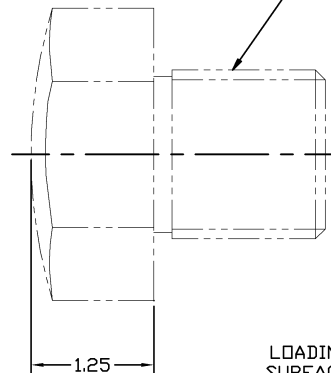

UNIT IS SHOWN WITH OPTIONAL MOUNTING (TENSION) BASE KIT WHICH INCLUDES (16) 1/2-20 HEX BOLTS, BASE, AND IS FACTORY ASSEMBLED

FOR ADDITIONAL INFORMATION SEE LEBOW SPECIFICATION SHEET S-3175

TENSION BASES ARE RECOMMENDED FOR ALL APPLICATIONS. WHEN MOUNTING WITHOUT TENSION BASE ATTENTION MUST BE GIVEN TO THE MATING SURFACES WITH REGARD TO FLATNESS, HARDNESS, AND STIFFNESS.

DET. NO.	PART NO.	DESCRIPTION	REC'D.
		<b>Lebow Products</b> Lebow Products Troy, Michigan	
UNLESS OTHERWISE SPECIFIED LINEAR DIMENSIONS ARE IN INCHES REMOVE ALL BURRS & ANGULAR DIMENSIONS ARE IN DEGREES SHARP EDGES DIMENSION LIMITS HELD AFTER PLATING SURFACE FINISH 125 ✓			
TOLERANCES		DR. BY: J.R.	CHK'D. BY: S.M.
DRILLED HOLES -000 +007	TWO PLACE DECIMALS ± .005	THREE PLACE DECIMALS ± .002	ANGLES ± 0' 30"
SCALE: NONE	REF. DWG. C-31493	FRACTIONAL DIMENSIONS ± 1/64	MAT'L: -----
DATE: APPV'D.	DATE: CHG'D.	DATE: ECN NO.	DATE: SYM.
TITLE: O.D. LOAD CELL		DRAWING NO. C-3175-D	REV.

REMOVED CAPACITY & OVERLOAD RATING	REVISIONS
AND 1/2 SCALE ASSY. VIEW	
REDEWAW ON CAD	