

1CO GAS SENSOR

002786

Issue 2

Carbon Monoxide Analogue Gas Sensor

DOCUMENT PURPOSE

The purpose of this document is to present the performance specification of the 1series 1CO carbon monoxide gas sensor.

This document should be used in conjunction with the 1CO Characterisation Note, the Operating Principles (OP08), and the Product Safety Datasheet (PSDS 12.1).

For guidance on sensor performance outside of these limits, please refer to the 1CO Characterisation Note.

Output signal can drift below the lower limit over time. For guidance on the safe use of the sensor, please refer to the Operating Principles (OP08).



PORTFOLIO

The 1series gas sensor is a small sensor that enables slim profile gas detector design.

With the 1series low-profile design, the sensors have turrets to mount into the front of the instrument in order to minimize instrument height. This revolutionary design also simplifies target-gas access to the sensor face and features an option for a replaceable external membrane.



Carbon Monoxide (CO)
Sensor: **1CO**

Part Number: AB010-RO1A-CIT



2 YEAR WARRANTY

(24 months from date of despatch)

DESCRIPTION

The 1series analogue gas sensor is compact low profile sensor utilizing the trusted Honeywell Technology. These sensors have an extended operating life of five years along with extended temperature and humidity ranges.

FEATURES AND BENEFITS



Enables smaller instruments



Designed to meet global performance standards:

ANSI/ISA 92.00.01-2010
BS EN 45544-1:2015
AS/NZS 4641-2007



Enhanced performance over an extended environmental range



5-year expected operating life



RoHS compliant


ANALOGUE GAS SENSOR (1SERIES) 1CO SERIES

TABLE 1. TECHNICAL SPECIFICATIONS

MEASUREMENT	
Technology	Electrochemical
Measurement Range	0.5 ppm CO to 1000 ppm CO (EN 45544 applications)
Maximum Overload	2000 ppm CO
Onboard Filter	To remove acid gases (see note on page 3)
Sensitivity*	50 nA/ppm ±10 nA/ppm
T50 Response Time*	< 15 seconds (@ 20°C) < 20 seconds (@ -40°C to +60°C)
T90 Response Time*	Typically < 20 seconds
Recovery Time	from 2000 ppm to <40 ppm from 100 ppm to <2 ppm
	< 180 seconds <30 seconds
Baseline Offset* (in clean air)	< ±3 ppm CO equivalent
Baseline Shift (-40°C to 60°C)	< ±12 ppm CO equivalent
Repeatability*	< ±2% of measured value
Linearity*	Linear ± 5% (0 ppm CO to 2000 ppm CO)
ELECTRICAL	
Recommended Load Resistor	5 Ω to 10 Ω
Bias Voltage	No bias
MECHANICAL	
Weight	< 5 g
Outer Plastic Body Material	Modified PPO
O-ring Material	FKM60 ±5 shore A
Contact Material	Gold plated
Orientation Sensitivity	None
ENVIRONMENTAL	
Operating Temperature Range	-40°C to +60°C
Operating Humidity Range	5 %RH to 95 %RH non-condensing (Refer to Characterization Note)
Operating Pressure Range	600 mbar to 1200 mbar
LIFETIME	
Long Term Output Drift*	< 5% signal loss per annum
Expected Operating Life	5 years in air

*Specifications are valid at 20°C, 50 %RH, and 1013 mBar, using Honeywell recommended circuitry. Performance characteristics outline the performance of sensors supplied within the first three months. Output signal can drift below the lower limit over time.

Product Dimensions

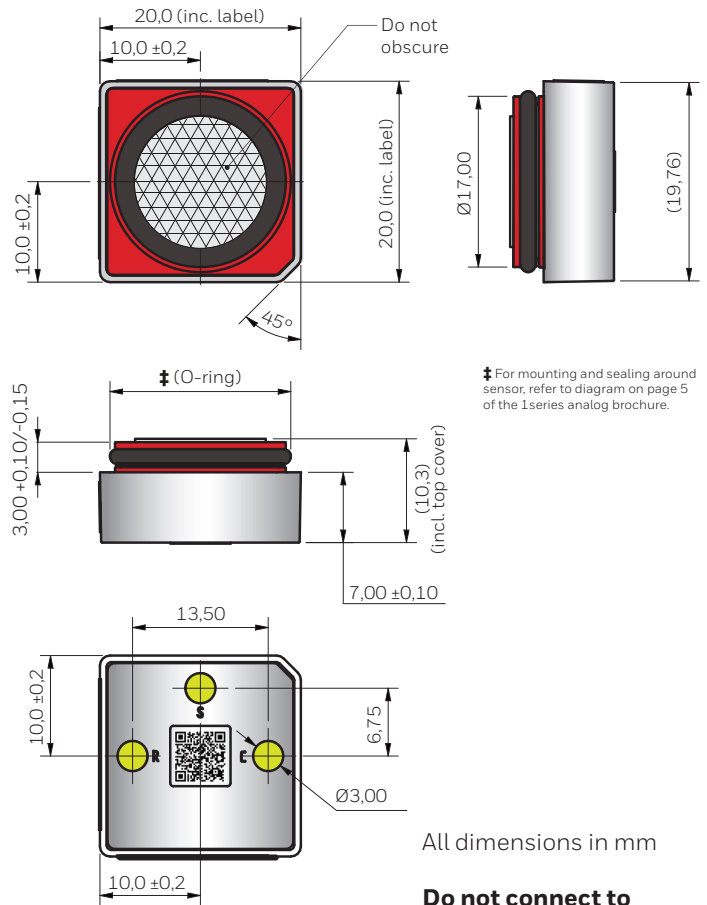

‡ For mounting and sealing around sensor, refer to diagram on page 5 of the 1Series analog brochure.

All dimensions in mm

Do not connect to unlabeled pins.

TABLE 2. PINOUT

Pin	Label	Description
1	S	Sensing electrode
2	R	Reference electrode
3	C	Counter electrode

ANALOGUE GAS SENSOR (1SERIES)

1CO SERIES

Filter Information

Activated carbon cloth filter with high surface area:

- Removes acid gases such as SO₂, NO₂, and H₂S
- 25,000 ppm hours H₂S filter capacity
- Protects from exposure to alcohol such as methanol, ethanol, and IPA (<1000 ppm hours)

Poisoning

Gas sensors are designed for operation in a wide range of environments and harsh conditions. However, it is important that exposure to high concentrations of solvent vapours is avoided during 1) storage, 2) fitting into instruments and 3) operation.

When using sensors with printed circuit boards (PCBs), degreasing agents should be used before the sensor is fitted.

Do not glue directly on or near the sensor as the solvent may cause crazing of the plastic.

WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective. **The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.**

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

FOR MORE INFORMATION

Honeywell Advanced Sensing Technologies services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing, or the nearest Authorized Distributor, visit sps.honeywell.com/ast or call:

USA/Canada	+302 613 4491
Latin America	+1 305 805 8188
Europe	+44 1344 238258
Japan	+81 (0) 3-6730-7152
Singapore	+65 6355 2828
Greater China	+86 4006396841

Honeywell

Advanced Sensing Technologies

830 East Arapaho Road
Richardson, TX 75081
sps.honeywell.com/ast

WARNING MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only. Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

SAFETY NOTE

This sensor is designed to be used in safety-critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.