

JUN 26 1998


MANUAL BRUSH ASSY.(STD.)
AIR OPERATED
BRUSH ASSY. (OPTIONAL) (K)

RECEPTACLE
MS-3102E-1AS-5P
(MATING CONN. FURN)

MAGNETIC PICK-UP
(OPTIONAL)

REMOVABLE BRUSH ASSY

1/4-20 THD 1/2 DEEP
USE FOR RESTRAINING
STRAP WHEN FOOT MTG
IS OMITTED.

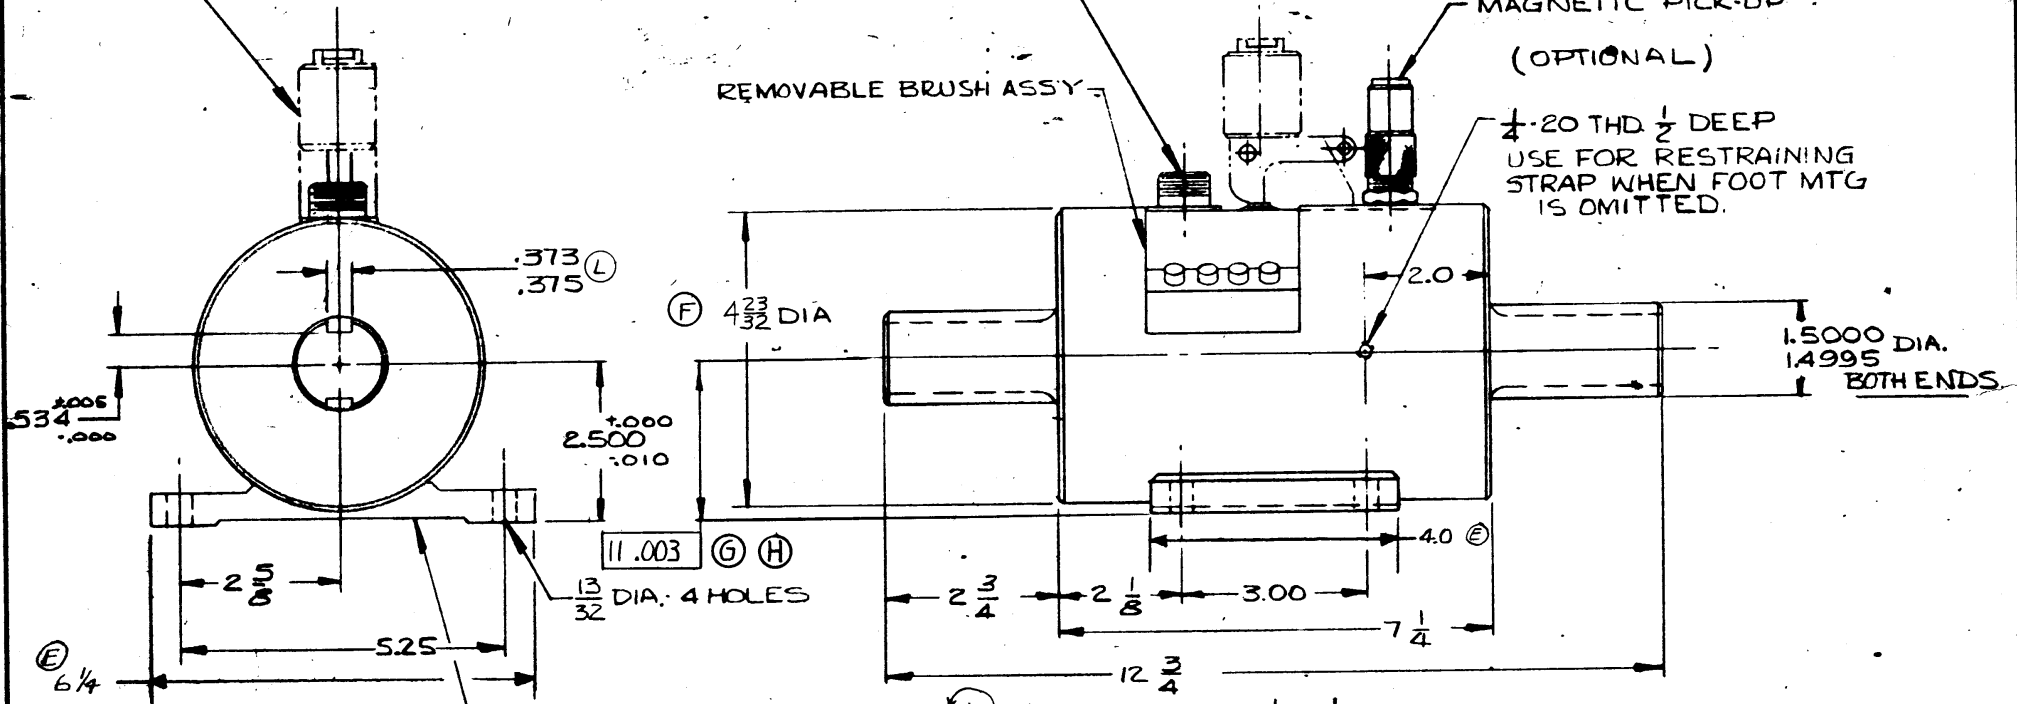

MOUNTING BASE (OPTIONAL)
REMOVABLE FOR IN-LINE
MTG.

(J) NOTE:
1. SEE DWG. B-1105 FOR SPECIFICATION INFO.

| | | | |
|---|--------------------|---------------|----------|
| J | ADDED NOTE 1 | LINE | 8-2-83 |
| I | ECN 2976 | LINE | 8-4-81 |
| H | ECN 2702 CORRECTED | 5H 9-18-78 | |
| G | ECN 2702 | GH | 5-18-78 |
| F | WAS 4 3/4 | ML. | 8/24/77 |
| E | ADDED DIM'S | PL | 8/24/77 |
| D | ECN 2209 | | 10-10-75 |
| C | ADDED Output | we | 3-4-70 |
| B | ECN 1500 | | 8-4-69 |
| A | REDRAWN | | 6-13-68 |

| DET. NO. | PART NO. | DESCRIPTION | REV'D |
|---|-----------|--|--------------------------|
| | | O. D. DWG ~ IN-LINE OR FOOT MOUNTED TORQUE PICK-UP | |
| SCALE: | DRAWN BY: | REF. DWG: | MAT'L: |
| HALF | CURTIS | C-12846 | |
| DATE: | CHK'D BY: | MODEL: | JOB NO.: |
| 6-13-68 | | 1105 | |
| UNLESS OTHERWISE SPECIFIED: | | | |
| TOLERANCE ON FRACTIONS ± 1/64 | | TOLERANCE ON DRILLED HOLES ± .002 | |
| TWO PLACE DECIMALS ± .010 | | REMOVE ALL BURRS & SHARP EDGES | |
| THREE PLACE DECIMALS ± .005 | | DIMENSION LIMITS HELD AFTER PLATING | |
| ANGLES ± 0.5° | | SURFACE FINISH 125A | |
| LEBOW ASSOCIATES, INC. OAKTOWN, MICHIGAN | | | DRAWING NO. B-1105-DD |

| | | | |
|--------|-------|---------|-------------|
| 10,000 | 8,500 | 1105-6K | 2.0MV/V NOM |
| 5000 | 8,500 | 1105-4K | 2.0MV/V NOM |
| CAP-Y | R.P.M | MODE | OUTPUT |

| | | |
|---|--------------------------|----------|
| L | 373/375 WAS 375/375 | 5/84 |
| | ECN 5202 | |
| K | DELETED DIM MODIFICATION | 5/84 |
| | 1077 | ECN 5486 |

R/S/P/A