


# AEROSPACE PROXIMITY SENSORS, GAPS & HAPS SERIES



## GAPS | GENERAL Aerospace Proximity Sensor

## HAPS | HARSH Application Proximity Sensor

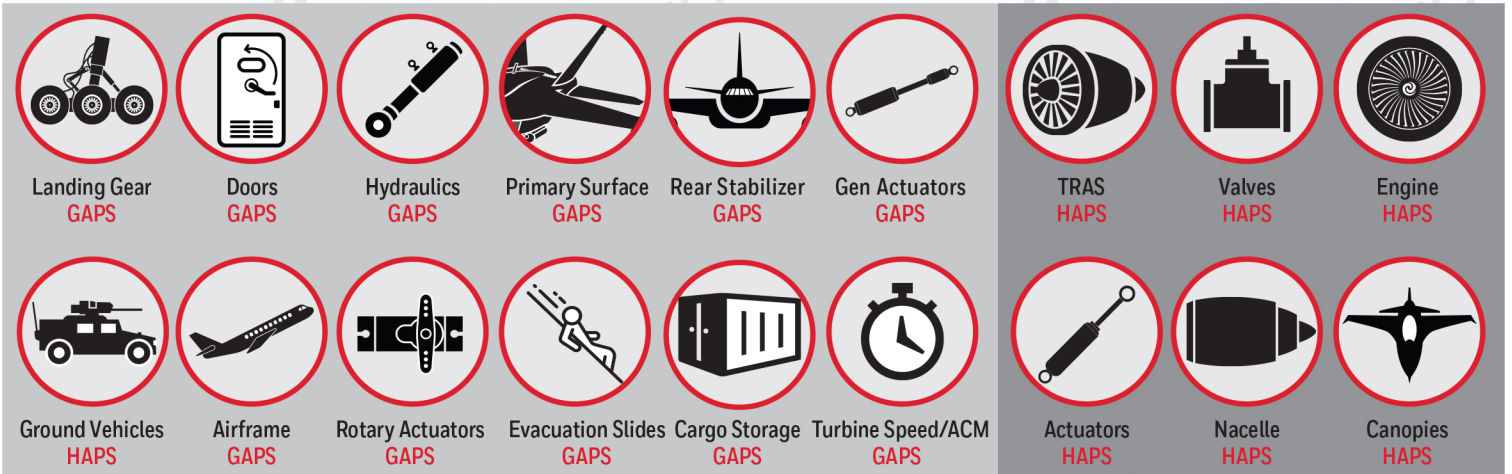

### GAPS

### DIFFERENTIATORS

### HAPS

500,000	MTBF > FLIGHT HOURS	500,000
	<b>MECHANICAL CHARACTERISTICS</b>	
115°C	OPERATING TEMPERATURE	115°C
20 G	VIBRATION	20 G*
40 G	OPERATING SHOCK	20 G
	<b>ELECTRICAL CHARACTERISTICS</b>	
150 mA Level W	RADIO FREQUENCY CONDUCTED SUSCEPTIBILITY	300 mA Level Y
100 V/m CAT F	RADIO FREQUENCY RADIATED SUSCEPTIBILITY	200 V/m CAT G
Level 3	LIGHTNING INDUCED TRANSIENT SUSCEPTIBILITY	Level 3
ON/OFF 20 mA	OUTPUT TYPE	IHM ON/OFF 250 mA
1000 Vdc/750 Vac	DIELECTRIC/IR	500 Vdc/500 Vac

\* HAPS has a Q factor of 4. Contact Honeywell for more information.