


SPECIFICATIONS P/N 2329

Available Ranges: 4000, 5000 LBS.
 Non-linearity/Hysteresis: $\pm 0.2\%$ F.S.
 Non-repeatability: $\pm 0.5\%$ F.S.
 Output: 2mV/V
 Resolution: Infinite
 Operating Temperature: -65 to +250 deg F
 Compensated Temperature: 60 to 160 deg F
 Temperature Effect on Zero/Span: .005% F.S./deg F
 Strain Gage Type: Bonded Foil
 Excitation Voltage: 10.0 VDC
 Bridge Resistance: 350 ohm
 Safe Overload: 50% over capacity
 Deflection- Full Scale: .001"-.003"
 Casing Material: 17-4 PH Stainless

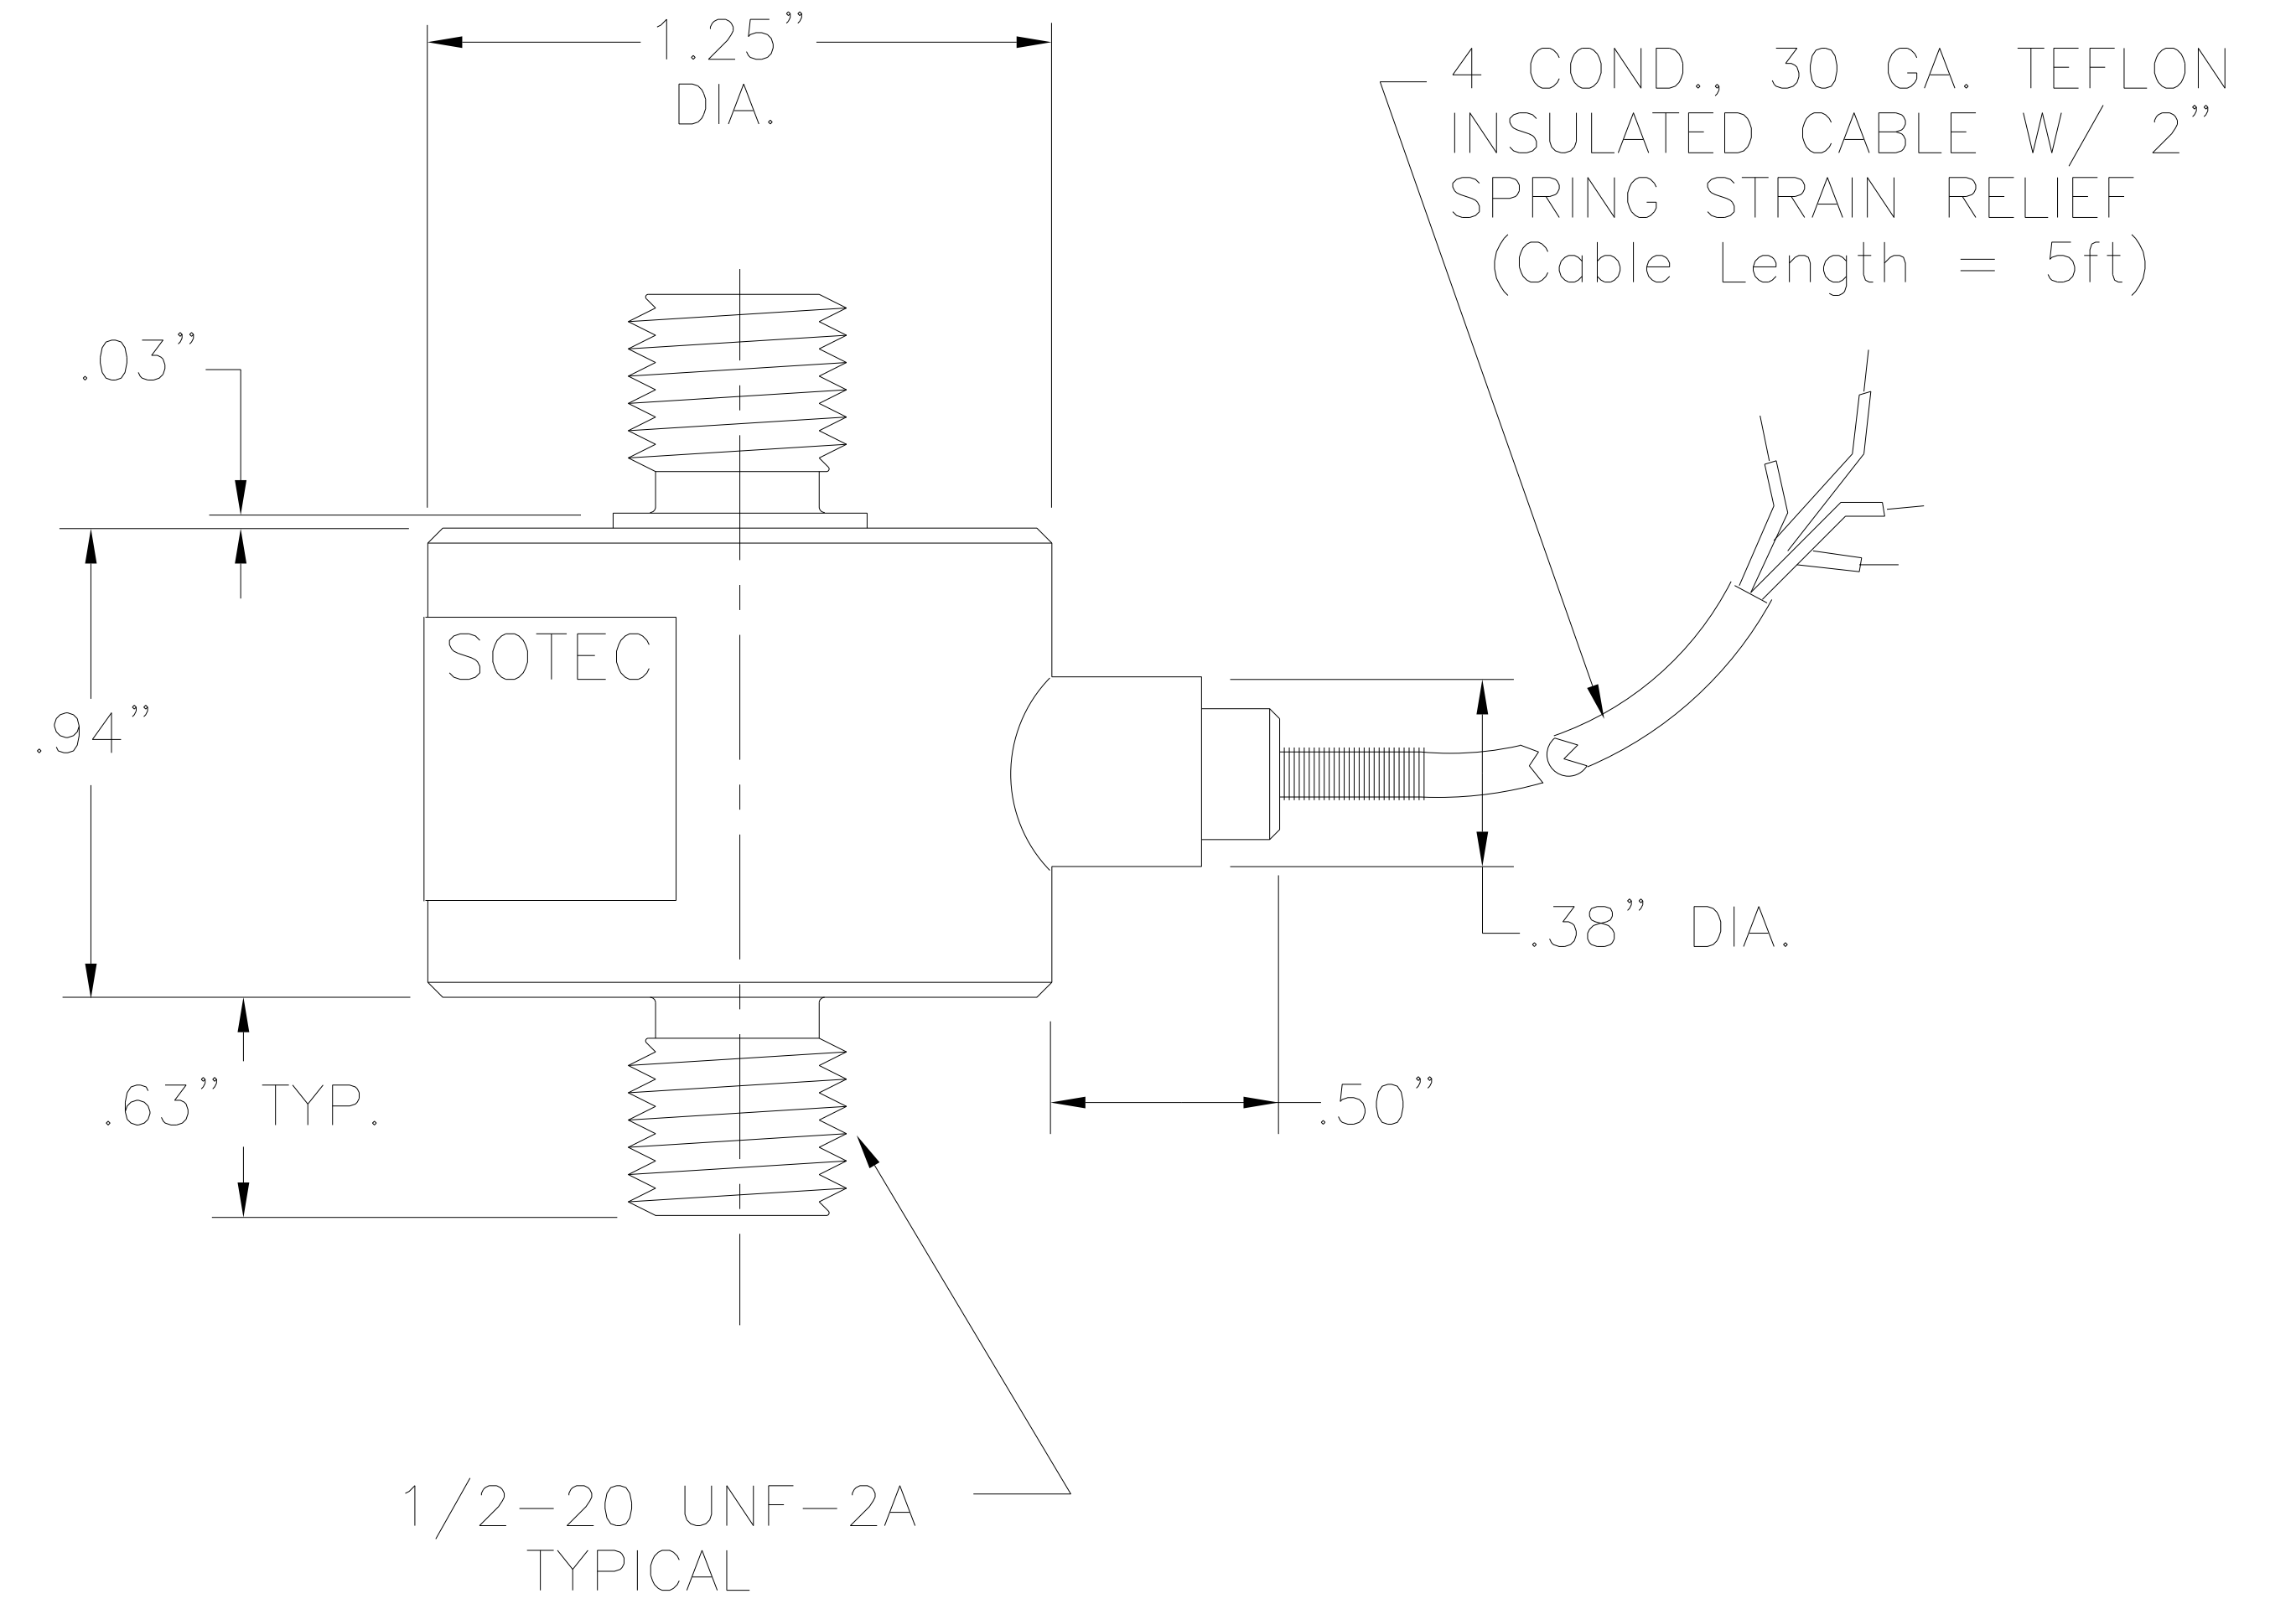

WIRING CODE

RED +EXCITATION
 BLACK -EXCITATION
 GREEN -OUTPUT
 WHITE +OUTPUT

GT CODE	REV	DESCRIPTION	REVISED BY	RELEASE DATE
GT SIZE CODE	SCALE: ~~~	DRAWN 9/18/91	CHECKED: MAB	APPROVED:
USED ON	SENSOTEC INC. 1200 CHESAPEAKE AVE. COLUMBUS, OHIO 43212			
MATERIAL SPEC.	.X	MODEL 31 LOAD CELL P/N 2329 4K-5K LBS., 1/2-20 UNF-2A		
	.XX $\pm .01$ "	DOCUMENT NUMBER 000-2396-00		
	.XXX $\pm .005$ "			
	$\pm 1/2$ "	SHEET 1 OF 1		