


HONEYWELL PART NUMBER 000-2983-00

REV	DOCUMENT	CHANGED BY	CHECK
A	36893	CJB 6/25/09	-

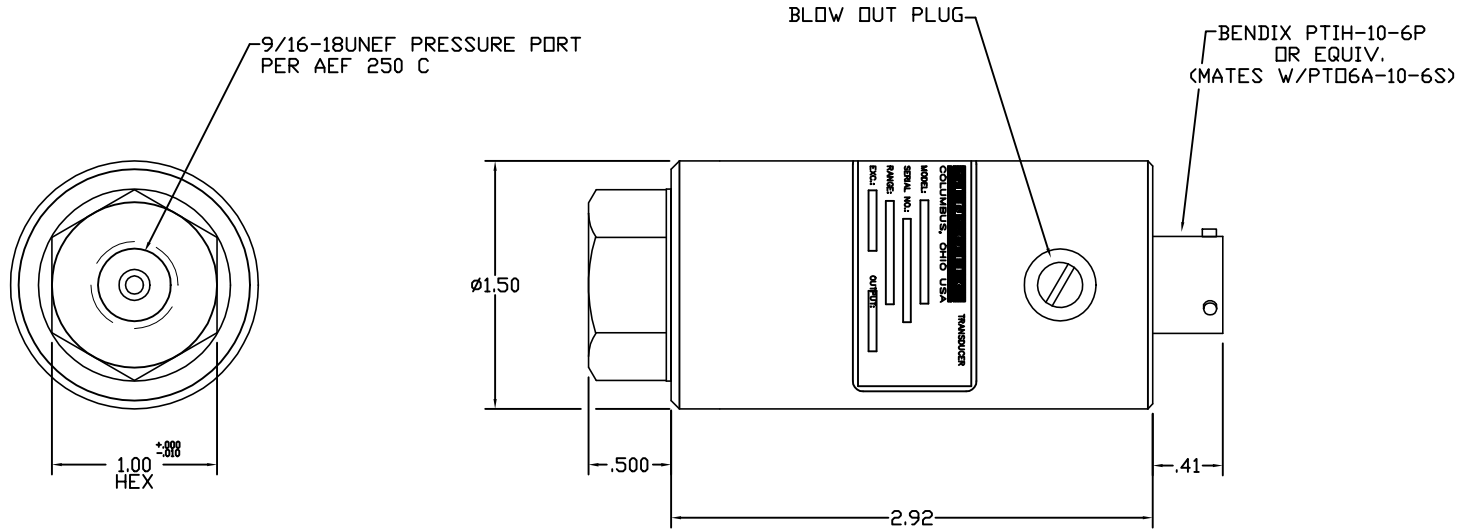


SPECIFICATIONS

MODEL: SENSOTEC HP
 RANGE: 50000 PSI - 100000 PSI
 ACCURACY: ±0.5% F.S.
 TEMP COMP.: 60°F TO 160°F STD.
 ZERO COMP.: ±0.5% F.S./100°F
 SPAN COMP.: ±0.5% Rdg/100°F
 SAFE OVERLOAD: 125% F.S.
 EXCITATION: 10.0 VDC
 OUTPUT: 1 mV/V
 WETTED MAT'L: CARPENTER PROPRIETARY CUSTOM 465

UNAMPLIFIED	
PIN	DESIGNATION
A	(+)EXCITATION
B	(+)EXCITATION
C	(-)EXCITATION
D	(-)EXCITATION
E	(-)OUTPUT
F	(+)OUTPUT

-04	60000 PSI	-
-03-01	100000 PSI	T.C. -65°F TO 250°F
-03	100000 PSI	-
-02-02	75000 PSI	T.C. 30°F TO 130°F
-02-01	75000 PSI	T.C. 0°F TO 185°F
-02	75000 PSI	-
-01-02	50000 PSI	T.C. 0°F TO 185°F
-01-01	50000 PSI	T.C. 70°F TO 325°F
060-5651-01	50000 PSI	-

DESIGN UNITS: INCH			
TOLERANCES UNLESS NOTED:			
NO PLACES	X	±	-
ONE PLACE	.X	±	.1
TWO PLACE	.XX	±	.01
THREE PLACE	.XXX	±	.005
ANGLES	X	±	X



DRAWN	MLF	6/16/95
CHECK	BDR	8/29/95
THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE PERMISSION OF HONEYWELL.		
INTERPRET PER ASME Y14.5M-1994 OTHER HONEYWELL ENGINEERING STANDARDS MAY APPLY		

Honeywell					
TITLE HIGH PRESSURE TRANSDUCER STD. CONNECTOR, AEF 250 C, NON-AMPLIFIED					
SIZE	TYPE	CAGE CODE	DRAWING NAME	REV	
B	E	51518	000-2983-00	A	
SCALE	-			SHEET 1 of 1	