

**Hydrogen Cyanide**  
**Sensoric HCN 3E 30 F**



# Product Data Sheet

## Sensoric HCN 3E 30 F

### FEATURES

Amperometric 3 electrode sensor cell  
Very stable zero reading  
Very selective  
Highly sensitive  
Fixed organic gel electrolyte

### TYPICAL APPLICATIONS

TLV-monitoring, leakage detection  
portable & fixed point applications  
Gold mining

### PART NUMBER INFORMATION

MINI	1639-231-30009
SENSORIC CLASSIC	1639-231-30069
CTL 4 series adaptation	1639-231-30049
CTL 7 series adaptation	1639-231-30079

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## Sensoric HCN 3E 30 F

### TECHNICAL SPECIFICATIONS

Measuring Range	0 – 30 ppm <sup>1)</sup>
Sensitivity Range	60 nA/ ppm ± 15 nA/ ppm
Zero Current at 20°C	< ± 15 nA
Resolution at 20°C	< 0.2 ppm
Bias Potential	0 mV
Linearity	< 5% full scale
Response Time at 20°C	
t50	< 25 s calculated from 2 min. exposure time
t90	< 50 s calculated from 2 min. exposure time
Long Term Sensitivity Drift	< 5% per month
Operation Conditions	
Temperature Range	-40°C to +40°C
Humidity Range	15–95% r.H., non–condensing
Effect of Humidity	no effects
Sensor Life Expectancy	> 18 months
Warranty	12 months

1) 0 – 100 ppm during short gas exposure in minute range.


Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## Sensoric HCN 3E 30 F

### OUTPUT vs. TEMPERATURE:

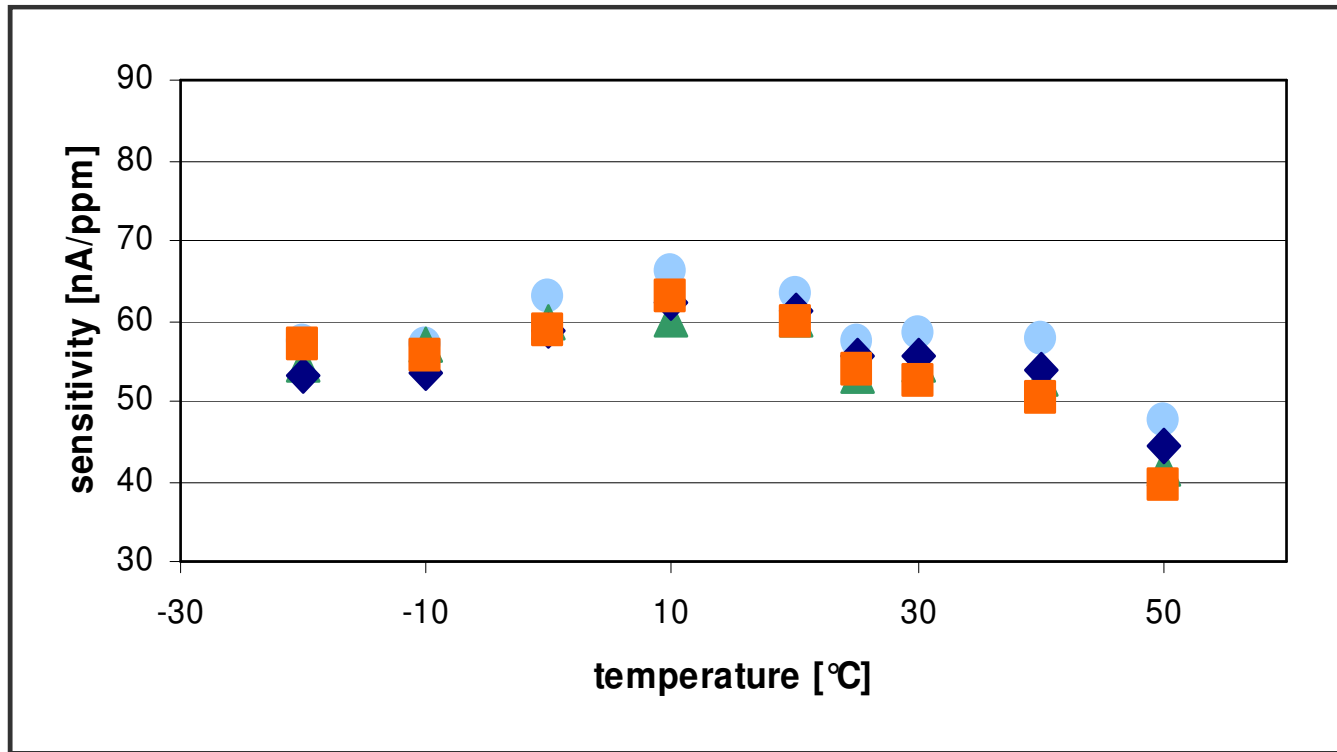


Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

# Product Data Sheet

## Sensoric HCN 3E 30 F

### ZERO READING vs. TEMPERATURE:

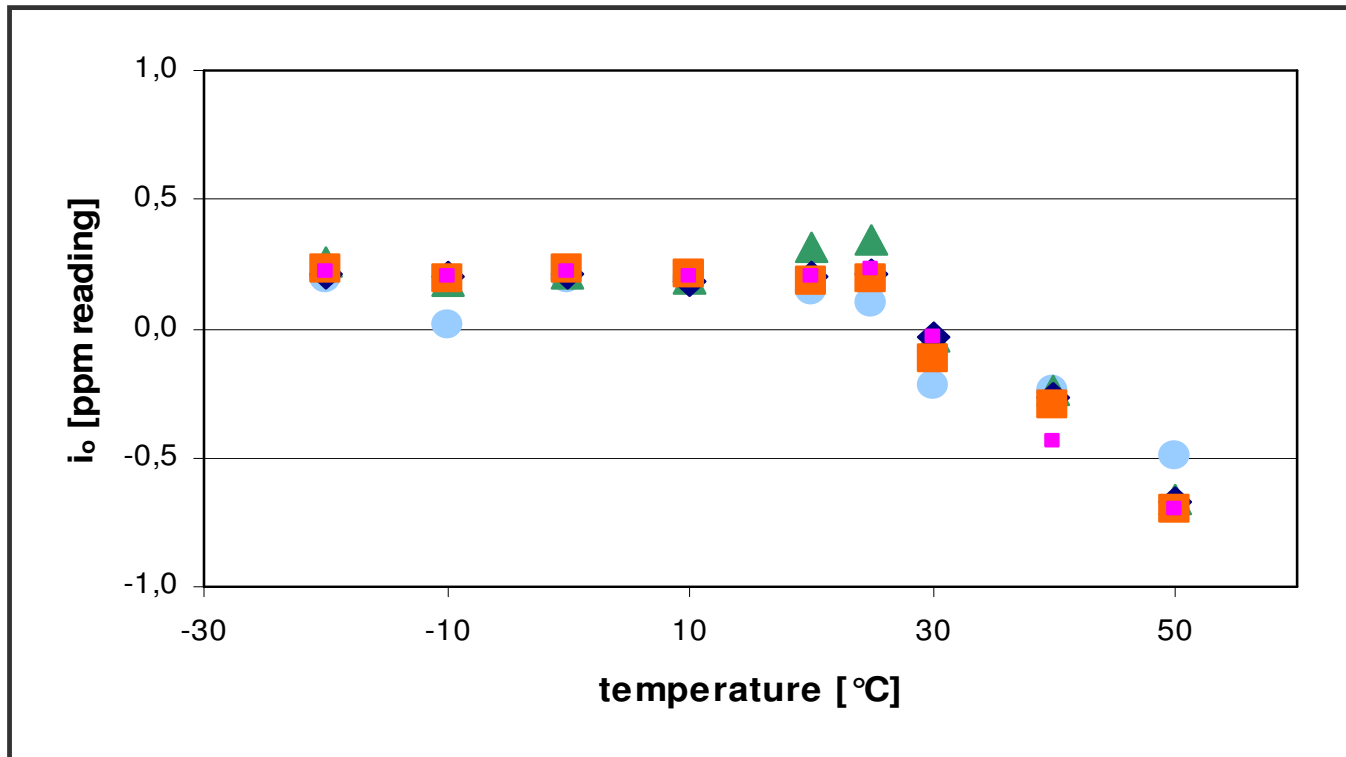

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.



# Product Data Sheet

## Sensoric HCN 3E 30 F

### CROSS SENSITIVITIES AT 20°C

Gas	Concentration	Reading [ppm]
Alcohols	1000 ppm	0
Carbon Dioxide	5000 ppm	0
Carbon Monoxide	100 ppm	0
Hydrocarbons	% range	0
Hydrogen	10000 ppm	0
Nitric Oxide	100 ppm	-5
Nitrogen Dioxide	10 ppm	-7
Hydrogen Sulfide	20 ppm	0 <sup>1</sup>

1) Short gas exposure in minute range; after filter saturation: approx. 40 ppm reading.

#### Notes:

1. Interference factors may differ from sensor to sensor and with life time. It is not advisable to calibrate with interference gases.
2. This table does not claim to be complete. The sensor might also be sensitive to other gases.

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

# Product Data Sheet

## Safety Note

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

## Attention

Use of the Sensoric range sensors requires complete understanding of the instructions. Before using Sensoric range sensors please carefully read 'Application Notes' which can be found at [www.citytech.com](http://www.citytech.com) under the heading 'Support' -> 'Application Notes' -> 'Sensoric'

Product Safety Data Sheets (PSDS) can be obtained at [www.citytech.com](http://www.citytech.com) under the heading 'Support' -> 'Product Safety Datasheets'

For further assistance on sensor selection and use, please contact a member of the Technical Sales team.

Sensoric deems the data contained herein as factual, and the opinions expressed are those of qualified experts based on the results of tests conducted. The above data can not be used as a warranty provision or representation for which Sensoric assumes legal responsibility. The data are offered solely for consideration, investigation and verification. Any use of this information is subject to federal, state and local laws and regulations.

