B-2110-D

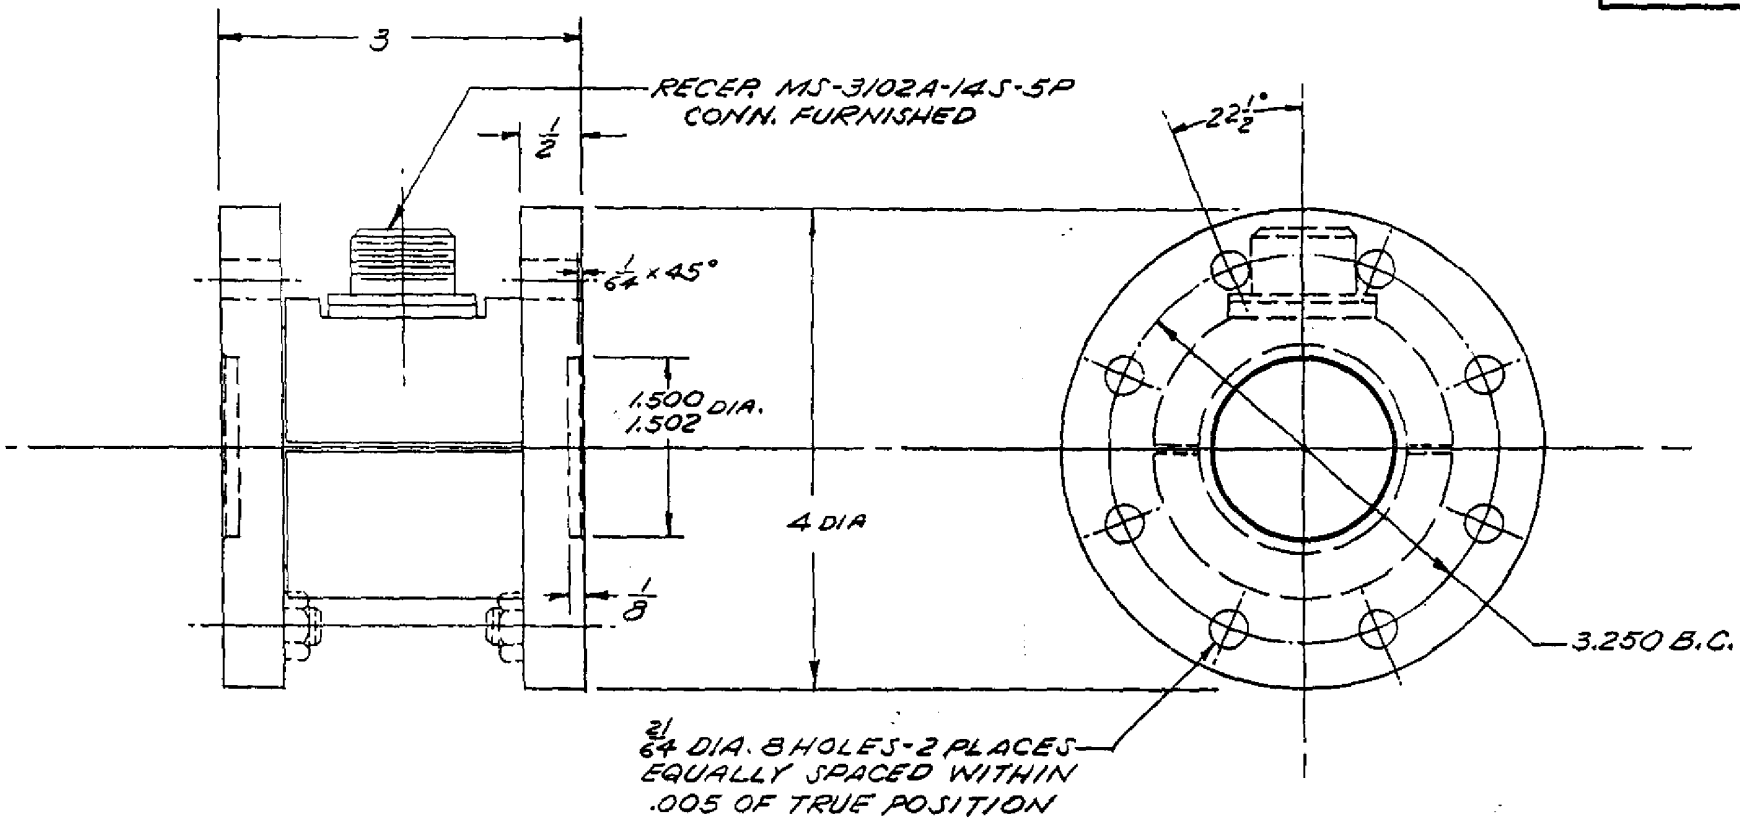

2110-10K	10000 IN-LB	(D)
2110-5K	5000 IN-LB	(B)
2110-500	500 IN-LB	(A)
2110-1K	1000 IN-LB.	
2110-6K	6000 IN.LB.	
2110-4K	4000 IN.LB.	
2110-2K	2000 IN.LB.	
MODEL	CAPACITY	

(C) Performance Spec. S-2110

OUTPUT 2.0 MV/VOLT NOMINAL

SYM.	REVISION	DATE
D	Added 10K Capacity	3-1-66
C	Added Perf. Spec.	3-3-66
B	ECN 2737	12-11-64
A	Added 500 IN-LB (C)	8-4-62

DET. No	PART No	DESCRIPTION	REQ'D

INSTALLATION DIMENSIONS ~ FLANGED REACTION TORQUE SENSOR

SCALE: FULL	DRAWN BY: C. OSTER	REF. DWG:	MAT'L:
DATE: 5-24-65	CHK'D BY:	MODEL: 2110	JOB NO.

UNLESS OTHERWISE SPECIFIED:
TOLERANCE ON FRACTIONS ± 1/64
TWO PLACE DECIMALS ± .010
THREE PLACE DECIMALS ± .005
ANGLES ± 0°30'
TOLERANCE ON DRILLED HOLES ± .002/.000
REMOVE ALL BURRS & SHARP EDGES
DIMENSION LIMITS HELD AFTER PLATING
SURFACE FINISH 125

LEBOW ASSOCIATES, INC.
OAK PARK, MICHIGAN

DRAWING NO. B-2110-D