

Outdoor Selectable-Output Horns, Strobes, and Horn Strobes

SpectrAlert* Advance outdoor selectable-output horns, strobes, and horn strobes are rich with features that cut installation times and maximize profits.





Features

- Automatic selection of 12- or 24-volt operation at 15 and 15/75 candela
- Field-selectable candela settings on wall and ceiling units: 15, 15/75, 30, 75, 95, 110, 115, 135, 150, 177, and 185
- Plug-in design with minimal intrusion into the back box
- Tamper-resistant construction
- Universal mounting plate for wall- and ceiling-mount units
- Mounting plate shorting spring tests wiring continuity before devices are installed
- Weatherproof per NEMA 4X, IP56
- Listed to UL 1638 (strobe) and UL 464 (horn)
- Rated from -40°F to 151°F
- Horn rated at 88+ dBA at 16 volts
- Rotary switch for horn tone and three volume selections
- Compatible with System Sensor synchronization protocol and legacy SpectrAlert products

The SpectrAlert Advance series offers the broadest line of outdoor horns, strobes, and horn strobes in the industry. With white and red plastic housings, wall and ceiling mounting options, and plain and FIRE-printed devices, SpectrAlert Advance can meet virtually any application requirement.

SpectrAlert Advance outdoor horns, strobes, and horn strobes can be used indoors or outdoors in wet or dry applications, and can provide reliable operation from -40°F to 151°F.

Like the entire SpectrAlert Advance product line, these devices include a variety of features that increase their application versatility while simplifying installation. All devices feature plug-in designs with minimal intrusion into the back box, which make installations fast and foolproof while virtually eliminating costly and time-consuming ground faults.

All horns, strobes, and horn strobes use a universal mounting plate with an onboard shorting spring that tests wiring continuity before the device is installed, protecting devices from damage. In addition, field-selectable candela settings, automatic selection of 12- or 24-volt operation, and a rotary switch for horn tones with three volume selections enables installers to easily adapt devices to suit a wide range of application requirements.

Agency Listings









7300-1653:187 (outdoor strobes 7125-1653:188 (horn strobes, chime strobes) 7135-1653:189 (horns, chimes)

SpectrAlert Advance Outdoor Horn, Strobe, and Horn Strobe Specifications

Architect/Engineer Specifications

General

SpectrAlert Advance outdoor horns, strobes and horn strobes shall mount to a weatherproof back box. A universal mounting plate shall be used for mounting ceiling and wall products. The notification appliance circuit wiring shall terminate at the universal mounting plate. Also, SpectrAlert Advance products, when used with the Sync•Circuit™ Module accessory, shall be powered from a non-coded notification appliance circuit output and shall operate on a nominal 12 or 24 volts. When used with the Sync•Circuit Module, 12-volt-rated notification appliance circuit outputs shall operate between 9 and 17.5 volts; 24-volt-rated notification appliance circuit outputs shall operate between −40 and 151 degrees Fahrenheit from a regulated DC or full-wave rectified unfiltered power supply. Strobes and horn strobes shall have field-selectable candela settings including 15, 15/75, 30, 75, 95, 110, 115, 135, 150, 177, and 185.

Strobe

The strobe shall be a System Sensor SpectrAlert Advance Model	listed to UL 1971 and shall be approved for fire protective service. The strobe shall be
wired as a primary-signaling notification appliance and comply with the	Americans with Disabilities Act requirements for visible signaling appliances, flashing at
1 Hz over the strobe's entire operating voltage range. The strobe light sha	ll consist of a xenon flash tube and associated lens/reflector system. The strobe must be
installed with its weatherproof back box in order to remain outdoor appro	oved per UL. The strobe shall be suitable for use in wet environments.

Horn Strobe Combination

The horn strobe shall be a System Sensor SpectrAlert Advance Model ______ listed to UL 1971 and UL 464 and shall be approved for fire protective service. The horn strobe shall be wired as a primary-signaling notification appliance and comply with the Americans with Disabilities Act requirements for visible signaling appliances, flashing at 1 Hz over the strobe's entire operating voltage range. The strobe light shall consist of a xenon flash tube and associated lens/reflector system. The horn shall have three audibility options and an option to switch between a temporal three-pattern and a non-temporal (continuous) pattern. These options shall be set by a multiple position switch. On four-wire products, the strobe shall be powered independently of the sounder. The horn or horn strobe models shall operate on a coded or non-coded power supply. The horn strobe must be installed with its weatherproof back box in order to remain outdoor approved per UL. The horn strobe shall be suitable for use in wet environments.

approved per oc. The north strobe shall be suitable for use in wet environment	iens.
Physical/Electrical Specifications	
Operating Temperature	-40°F to 151°F (-40°C to 66°C)
Strobe Flash Rate	1 flash per second
Nominal Voltage	Regulated 12 DC/FWR or regulated 24 DC/FWR ¹
Operating Voltage Range ²	8 to 17.5 V (12 V nominal) or 16 to 33 V (24 V nominal)
Input Terminal Wire Gauge	12 to 18 AWG
Ceiling-Mount Dimensions (including lens)	6.8 " diameter $\times 2.5$ " high (173 mm diameter $\times 64$ mm high)
Wall-Mount Dimensions (including lens)	5.6" L × 4.7" W × 2.5" D (142 mm L × 119 mm W × 64 mm D)
Horn Dimensions	5.6" L × 4.7" W × 1.3" D (142 mm L × 119 mm W × 33 mm D)
Wall-Mount Weatherproof Back Box Dimensions (SA-WBB)	5.7 " L \times 5.1 " W \times 2.0 " D (145 mm L \times 130 mm W \times 51 mm D)
Ceiling-Mount Weatherproof Back Box Dimensions (SA-WBBC)	7.1" diameter \times 2.0" high (180 mm diameter \times 51 mm high)

Notes:

^{1.} Full Wave Rectified (FWR) voltage is a non-regulated, time-varying power source that is used on some power supply and panel outputs.

^{2.} P, S, PC, and SC products will operate at 12 V nominal only for 15 and 15/75 cd.

UL Current Draw Data

UL Max. Strobe Current Draw (mA RMS)							
		8–17.5	Volts	16-33\	/olts		
	Candela	DC	FWR	DC	FWR		
Standard	15	123	128	66	71		
Candela Range	15/75	142	148	77	81		
	30	NA	NA	94	96		
	75	NA	NA	158	153		
	95	NA	NA	181	176		
	110	NA	NA	202	195		
	115	NA	NA	210	205		
High	135	NA	NA	228	207		
Candela Range	150	NA	NA	246	220		
	177	NA	NA	281	251		
	185	NA	NA	286	258		

		8-17.5	Volts	16-33	Volts
Sound Pattern	dB	DC	FWR	DC	FWR
Temporal	High	57	55	69	75
Temporal	Medium	44	49	58	69
Temporal	Low	38	44	44	48
Non-Temporal	High	57	56	69	75
Non-Temporal	Medium	42	50	60	69
Non-Temporal	Low	41	44	50	50
Coded	High	57	55	69	75
Coded	Medium	44	51	56	69
Coded	Low	40	46	52	50

UL Max. Current Draw (mA	RMS), 2-Wir	e Horn Strobe	, Standard C	andela Range	(15–115 cd)			
	8–17.5 V	'olts	16-33 V	olts					
DC Input	15	15/75	15	15/75	30	75	95	110	115
Temporal High	137	147	79	90	107	176	194	212	218
Temporal Medium	132	144	69	80	97	157	182	201	210
Temporal Low	132	143	66	77	93	154	179	198	207
Non-Temporal High	141	152	91	100	116	176	201	221	229
Non-Temporal Medium	133	145	75	85	102	163	187	207	216
Non-Temporal Low	131	144	68	79	96	156	182	201	210
FWR Input									
Temporal High	136	155	88	97	112	168	190	210	218
Temporal Medium	129	152	78	88	103	160	184	202	206
Temporal Low	129	151	76	86	101	160	184	194	201
Non-Temporal High	142	161	103	112	126	181	203	221	229
Non-Temporal Medium	134	155	85	95	110	166	189	208	216
Non-Temporal Low	132	154	80	90	105	161	184	202	211

	16–33 Volts					16-33 Volts			
DC Input	135	150	177	185	FWR Input	135	150	177	185
Temporal High	245	259	290	297	Temporal High	215	231	258	265
Temporal Medium	235	253	288	297	Temporal Medium	209	224	250	258
Temporal Low	232	251	282	292	Temporal Low	207	221	248	256
Non-Temporal High	255	270	303	309	Non-Temporal High	233	248	275	281
Non-Temporal Medium	242	259	293	299	Non-Temporal Medium	219	232	262	267
Non-Temporal Low	238	254	291	295	Non-Temporal Low	214	229	256	262

Candela Derating

For K series products used at low temperatures, listed candela ratings must be reduced in accordance with this table.


Strobe Output (cd)
Listed Candela	Candela rating at -40°F
15	
15/75	Do not use below 32°F
30	
75	44
95	70
110	110
115	115
135	135
150	150
177	177
185	185

Horn Tones and Sound Output Data

			8-17.5		16-33		24-Volt Nominal			
Switch			Volts	5	Volts	5	Revei	berant	Aned	hoic
Position	Sound Pattern	dB	DC	FWR	DC	FWR	DC	FWR	DC	FWR
1	Temporal	High	78	78	84	84	88	88	99	98
2	Temporal	Medium	74	74	80	80	86	86	96	96
3	Temporal	Low	71	73	76	76	83	80	94	89
4	Non-Temporal	High	82	82	88	88	93	92	100	100
5	Non-Temporal	Medium	78	78	85	85	90	90	98	98
6	Non-Temporal	Low	75	75	81	81	88	84	96	92
7 [†]	Coded	High	82	82	88	88	93	92	101	101
8 [†]	Coded	Medium	78	78	85	85	90	90	97	98
9 [†]	Coded	Low	75	75	81	81	88	85	96	92

[†]Settings 7, 8, and 9 are not available on 2-wire horn strobe.

SpectrAlert Advance Dimensions

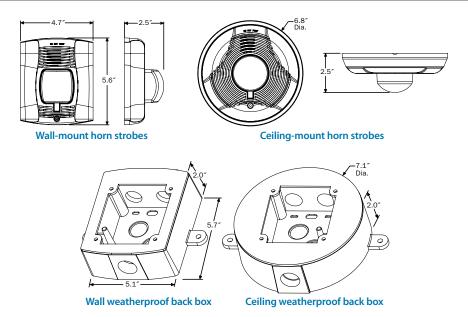

SpectrAlert Advance Ordering Information

•	5						
Model	Description						
Wall Horn S	Wall Horn Strobes						
P2RK*†	2-Wire Horn Strobe, Standard cd, Red, Outdoor						
P2RHK*†	2-Wire Horn Strobe, High cd, Red, Outdoor						
P2WK*†	2-Wire Horn Strobe, Standard cd, White, Outdoor						
P2WHK*†	2-Wire Horn Strobe, High cd, White, Outdoor						
P4RK [†]	4-Wire Horn Strobe, Standard cd, Red, Outdoor						
P4WK	4-Wire Horn Strobe, Standard cd, White, Outdoor						
P2RHK-120	2-Wire Horn Strobe, High cd, Red, Outdoor, 120 V						
Wall Strobe	S						
SRK*†	Strobe, Standard cd, Red, Outdoor						
SRHK*†	Strobe, High cd, Red, Outdoor						
SWK*†	Strobe, Standard cd, White, Outdoor						
SWHK*†	Strobe, High cd, White, Outdoor						

Model	Description						
Ceiling Hor	Ceiling Horn Strobes						
PC2RK	2-Wire Horn Strobe, Standard cd, Red, Outdoor						
PC2RHK	2-Wire Horn Strobe, High cd, Red, Outdoor						
PC2WK	2-Wire, Horn Strobe, Standard cd, White, Outdoor						
PC2WHK	2-Wire, Horn Strobe High cd, White, Outdoor						
PC4WK	4-Wire, Horn Strobe, Standard cd, White, Outdoor						
PC4WHK	4-Wire, Horn Strobe, High cd, White, Outdoor						
Ceiling Stro	bbes						
SCRK	Strobe, Standard cd, Red, Outdoor						
SCRHK	Strobe, High cd, Red, Outdoor						
SCWK	Strobe, Standard cd, White, Outdoor						
SCWHK	Strobe, High cd, White, Outdoor						
Horns	·						
HRK	Horn, Red, Outdoor						

Notes

When replacing standard outdoor units both the device and back box must be replaced.



^{*} Add "-P" to model number for plain housing (no "FIRE" marking on cover), e.g., P2RK-P.

 $[\]dagger$ Add "-R" to model number for weatherproof replacement device (no back box included), only for use with weatherproof outdoor flush mounting plate, WTP and WTPW.

[&]quot;Standard cd" refers to strobes that include 15, 15/75, 30, 75, 95, 110, and 115 candela settings. "High cd" refers to strobes that include 135, 150, 177, and 185 candela settings.