

Honeywell E-Mon

Honeywell E-Mon MMU MULTIPLE METER UNIT CABINETS

SPECIFICATION DATA

FEATURES

- Available in configurations containing up to 8, 16, or 25 meters.
- MMU cabinets may contain E-Mon® Class 1000, Class 2000 (kWh or kWh/demand), Class 3200, Green Class Meters and Class 6000.
- Compact installation of multiple meters allows for easy and centralized reading.
- Three-phase MMU cabinets come with prewired voltage feeds.
- For Class 1000, Class 2000, Class 3200, and Green Class Meters, IDRs (Interval Data Recorders) can be factory-installed inside MMU enclosures along with meters.
 - Allows for easy interface with E-Mon Energy software system
 - The connections from the meters to the IDR are prewired at the factory.
- Class 1000, Class 2000, Class 3200 and Green Class meters MMU cabinets may contain meters of different voltage configurations. (i.e. 208V & 480V meters inside a single MMU enclosure.)
- Class 6000 meters, uses the same meter for both 208V and 480V applications.

MODEL NUMBERS

When ordering, specify configuration, meters to be contained inside cabinet, and blank spaces (if any).

Class 3400 Example:


- 1 MMU8
- 6 E32-208200-MRTUKIT
- 1 E32-480400-MRTUKIT
- 1 Blank Spaces

Available Configurations:

- MMU8
- MMU16
- MMU24

MMU Dimensions (Class 1000, Class 2000, Class 3200, and Green Class meters)

NOTE: Not suitable for outdoor installations.

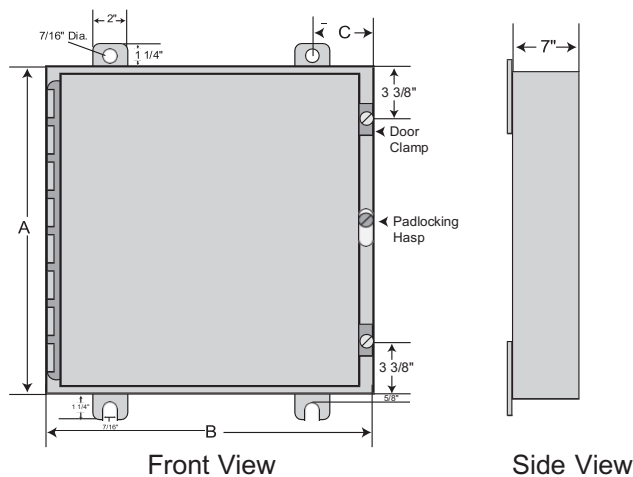


MMU	Dimensions (in inches)		
	A	B	C
MMU8	24	12	1-1/4
MMU16	24	20	3
MMU25	30	24	3

MMU	Meter Configuration		Total Meter Spaces
	Across	Down	
MMU8	2	4	8
MMU16	4	4	16
MMU24	4 or 5	4 or 5	24

MMU Dimensions (Class 6000)

NOTE: NEMA 4x certified enclosure

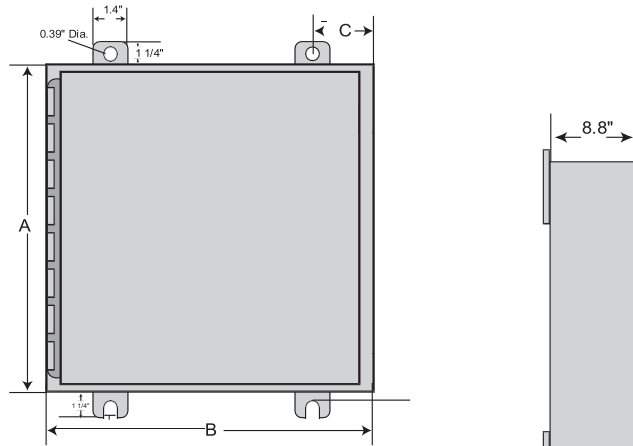

Front View

Side View



MODEL NUMBERS

When ordering, specify configuration, meters to be contained inside cabinet, and blank spaces (if any).

Class 6000 Example:

- 1 6000-MMU-8
- 8 EM3S-V-P-M

Available Configurations:

- MMU8 6000-MMU-8
- MMU16 6000-MMU-16
- MMU24 6000-MMU-24

MMU	Dimensions (in inches)		
	A	B	C
MMU8	24	16	3/4
MMU16	30	30	3/4
MMU24	36	36	3/4

MMU	Meter Configuration		Total Meter Spaces
	Across	Down	
MMU8	2	4	8
MMU16	4	4	16
MMU24	6	4	24



38-00077-01

Home and Building Technologies

In the U.S.:
 Honeywell E-Mon
 715 Peachtree Street NE
 Atlanta, GA 30308
customer.honeywell.com