#### Issue B

## **ABP SERIES**

#### For Use in Medical Ventilators

Basic Board Mount Pressure Sensors High Accuracy, Compensated/Amplified 60 mbar to 1.6 bar | 1 psi to 15 psi Digital or Analog Output, Liquid Media Capable

#### **DESCRIPTION**

The ABP Series are piezoresistive silicon pressure sensors offering a ratiometric analog or digital output for reading pressure over the specified full scale pressure span and temperature range. They are calibrated and temperature compensated for sensor offset, sensitivity, temperature effects and accuracy errors (which include nonlinearity, repeatability and hysteresis) using an on-board Application Specific Integrated Circuit (ASIC). Calibrated output values for pressure are updated at approximately 1 kHz for analog and 2 kHz for digital. All products are designed and manufactured according to ISO 9001 standards.

- Dry gases option: The input port is limited to non-corrosive, non-ionic media (e.g., dry air, gases) and should not be exposed to condensation. The gases are limited to media compatible with high temperature polyamide, silicone, alumina ceramic, silicon, gold, and glass.
- Liquid media option: Includes an additional silicone-based gel coating to protect the electronics under port P1. which enables use with non-corrosive liquids (e.g. water and saline) and in applications where condensation can occur. Since port P2 is designed for use with non-corrosive liquids, this option is often suitable for wet-wet differential sensing.

#### DIFFERENTIATION

- Enhanced accuracy helps the design engineer fully understand the error in measurement.
- Wide supply voltage range offers design flexibility.
- Power consumption when utilizing sleep mode option allows for use in battery-powered applications.

#### **VALUE TO CUSTOMERS**

- Simplifies design-in: Small size saves room on the PC board (PCB), or simplifies design in smaller and lower power devices. Meets Moisture Sensitivity Level 1 requirements, which allows for unlimited shelf life when stored at <30 °C/85 %RH and, under most storage conditions, allows for PCB soldering without any material concern about solder joint quality due to aging of the sensor terminals, which minimizes the concern about aging of the terminals prior PCB assembly. Pressure choices allow engineers to select range required for their application. Leadless SMT, SMT, and DIP package options.
- Cost-effective: Small size helps engineers reduce design and manufacturing costs while maintaining enhanced performance and reliability of the systems they design.
- Accurate: Total Error Band (TEB) and wide pressure range enable engineers to optimize system performance by improving resolution and system accuracy. Optional internal diagnostics validate that the sensor readings are correct
- Flexible: Supply voltage range, variety of pressure units, types, and ranges, output options, and wide operating temperature range simplify use in the application.
- Versatile: Wet-media compatibility, sleep mode, and temperature output options make the sensor a versatile choice for Internet of Things applications.
- Honeywell Brand: Utilizes proprietary Honeywell technology, and is protected by multiple global patents.

#### **POTENTIAL MEDICAL APPLICATIONS**

Oxygen concentrators, patient monitoring, sleep apnea equipment, ventilators/portable ventilators.



#### **FEATURES**

- Measures gage and differential pressures
- Total Error Band (see Figure 1): ±1.5 %FSS
- Liquid media option: Allows for wet/ wet operation on dual ported devices
- Industry-leading long-term stability: +0.25 %FSS
- Industry-leading accuracy: ±0.25 %FSS BFSL
- Wide pressure range: 60 mbar to 1.6 bar | 1 psi to 15 psi
- As small as 8 mm x 7 mm
- High burst pressures (see Table 7)
- Calibrated over temperature range of 0°C to 50°C [32°F to 122°F]
- Operates from a single power supply of either 3.3 Vdc or 5.0 Vdc
- Output: Ratiometric analog or I<sup>2</sup>C- or SPI-compatible 12-bit digital
- Power consumption: 2 uA typical when utilizing sleep mode option
- Meet IPC/JEDEC J-STD-020D.1 Moisture Sensitivity Level 1 requirements
- REACH and RoHS compliant
- Options: Internal diagnostic function, liquid media, sleep mode, temperature output



#### **PORTFOLIO**

Honeywell offers a variety of board mount pressure sensors for potential use in medical and industrial applications. To view the entire product portfolio, click here.



#### **VENTILATOR APPLICATIONS**

#### FIGURE 1. TOTAL ERROR BAND

Total Error Band (TEB) is a single specification that includes all possible sources of error. TEB should not be confused with accuracy, which is actually a component of TEB. TEB is the worst error that the sensor could experience. The TEB specification on a datasheet may be confusing. Honeywell uses the TEB specification in its datasheet because it is the most comprehensive measurement of a sensor's true accuracy. Honeywell also provides the accuracy specification in order to provide a common comparison with competitors' literature that does not use the TEB specification. Many competitors do not use TEB—they simply specify the accuracy of their device. Their accuracy specification, however, may exclude certain parameters. On their datasheet, the errors are listed individually. When combined, the total error (or what would be TEB) can be significant.

# All Possible Errors Offset Full Scale Span Pressure Non-Linearity Pressure Hysteresis Pressure Non-Repeatibility Thermal Effect on Offset Thermal Hysteresis Thermal Hysteresis

TABLE 1. ABSOLUTE MAXIMUM RATINGS <sup>1</sup>							
CHARACTERISTIC	MIN.	MAX.	UNIT				
Supply voltage (V <sub>supply</sub> )	-0.3	6.0	Vdc				
Voltage on any pin	-0.3	$V_{supply} + 0.3$	V				
Digital interface clock frequency: I <sup>2</sup> C SPI	100 50	400 800	kHz				
ESD susceptibility (human body model)	2	_	kV				
Storage temperature	-40 [-40]	85 [185]	°C [°F]				
Soldering time and temperature: lead solder temperature (DIP) peak reflow temperature (Leadless SMT, SMT)	4 s max. at 250°C [482°F] 15 s max. at 250°C [482°F]						

<sup>&</sup>lt;sup>1</sup>Absolute maximum ratings are the extreme limits the device will withstand without damage.

TABLE 2. ENVIRONMENTAL SPECIFICATIONS	
CHARACTERISTIC	PARAMETER
Humidity: all external surfaces internal surfaces of Liquid Media Option (T, V, F, G) internal surfaces of Dry Gases Option (N, D)	0 %RH to 95 %RH, non-condensing 0 %RH to 100 %RH, condensing 0 %RH to 95 %RH, non-condensing
Vibration	15 g, 10 Hz to 2 kHz
Shock	100 g, 6 ms duration
Life <sup>1</sup>	1 million pressure cycles minimum
Solder reflow	J-STD-020-D.1 Moisture Sensitivity Level 1 (unlimited shelf life when stored at <30°C/85 %RH)

<sup>&</sup>lt;sup>1</sup>Life may vary depending on specific application in which the sensor is used.

TABLE 3. WETTED MATERIALS <sup>1</sup>							
COMPONENT	PRESSURE PORT 3 (P3)						
COMPONENT	DRY GAS OPTION	LIQUID MEDIA OPTION	PRESSURE PORT 2 (P2)				
Ports and covers		high temperature polyamide					
Substrate	alumina ceramic	_	alumina ceramic				
Adhesives	epoxy, silicone	epoxy, silicone gel	epoxy, silicone				
Electronic components	silicon, glass, solder, gold, aluminum	304 SST	silicon				

<sup>&</sup>lt;sup>1</sup>Contact Honeywell Customer Service for detailed material information.

TABLE 4. SENSOR PRESSURE TYPES					
PRESSURE TYPE	DESCRIPTION				
Gage	Output is proportional to the difference between applied pressure and atmospheric (ambient) pressure.				
Differential	Output is proportional to the difference between the pressures applied to each port (Port $1 - Port 2$ ).				

#### **VENTILATOR APPLICATIONS**

TABLE 5. OPERATING SPECIFICATIONS							
CHARACTERISTIC		ANALOG			DIGITAL		
CHARACTERISTIC	MIN.	TYP.	MAX.	MIN.	TYP.	MAX.	UNIT
Supply voltage (V <sub>supply</sub> ): <sup>1, 2, 3</sup> 3.3 Vdc 5.0 Vdc	3.0 4.75	3.3 5.0	3.6 5.25	3.0 4.75	3.3 5.0	3.6 5.25	Vdc
Supply current: 3.3 Vdc 5.0 Vdc sleep mode option	_ _ _	2.1 2.7 —	2.8 3.8 —	_ _ _	3.1 3.7 1	3.9 4.6 10	mA mA uA
Operating temperature range <sup>4</sup>	-40 [-40]	_	85 [185]	-40 [-40]	_	85 [185]	°C [°F]
Compensated temperature range <sup>5</sup>	0 [-32]	_	50 [122]	0 [-32]	_	50 [122]	°C [°F]
Temperature output option <sup>6</sup>	_	_	_	_	±4	_	°C
Startup time (power up to data ready)	_	_	5	_	_	3	ms
Response time	_	1	_	_	0.46	_	ms
Clipping limit: upper lower	_ 2.5	_ _	97.5 —	_ _	_ _	_ _	%Vsupply
I <sup>2</sup> C/SPI voltage level: low high		_ _	_ _	_ 80	_ _	20 —	%Vsupply
Pull up on SDA/MISO, SCL/SCLK, SS	_	_	_	1	_	_	kOhm
Total Error Band <sup>7</sup>	_	-	±1.5	_	_	±1.5	%FSS <sup>8</sup>
Accuracy <sup>9</sup>	_	_	±0.25	_	_	±0.25	%FSS BFSL
Long term stability (1000 hr, 25°C [77°F])	-	-	±0.25	_	_	±0.25	%FSS
Output resolution	0.03	_ _		_ 12	_ _		%FSS bits

<sup>&</sup>lt;sup>1</sup>Sensors are either 3.3 Vdc or 5.0 Vdc based on the catalog listing selected.

<sup>&</sup>lt;sup>9</sup>Accuracy: The maximum deviation in output from a Best Fit Straight Line (BFSL) fitted to the output measured over the pressure range at 25°C [77°F]. Includes all errors due to pressure non-linearity, pressure hysteresis, and non-repeatability.

TABLE 6. SENSOR OUTPUT AT SIGNIFICANT PERCENTAGES (DIGITAL VERSIONS ONLY)						
% OUTPUT	DIGITAL COUNTS					
% 00 IPOI	DECIMAL	HEX				
0	0	0x0000				
10	1638	0x0666				
50	8192	0x2000				
90	14746	0x399A				
100	16383	0x3FFF				

<sup>&</sup>lt;sup>2</sup>Ratiometricity of the sensor (the ability of the device output to scale to the supply voltage) is achieved within the specified operating voltage.

<sup>&</sup>lt;sup>3</sup>The sensor is not reverse polarity protected. Incorrect application of supply voltage or ground to the wrong pin may cause electrical failure.

<sup>&</sup>quot;Operating temperature range: The temperature range over which the sensor will produce an output proportional to pressure.

<sup>&</sup>lt;sup>5</sup>Compensated temperature range: The temperature range over which the sensor will produce an output proportional to pressure within the specified performance limits.

For experience of the state of


Total Error Band: The maximum deviation from the ideal transfer function over the entire compensated temperature and pressure range. Includes all errors due to offset, full scale span, pressure non-linearity, pressure hysteresis, repeatability, thermal effect on offset, thermal effect on span, and thermal hysteresis.

<sup>&</sup>lt;sup>8</sup>Full Scale Span (FSS): The algebraic difference between the output signal measured at the maximum (Pmax.) and minimum (Pmin.) limits of the pressure range. (See Figure 2.)

#### **VENTILATOR APPLICATIONS**


#### FIGURE 2. TRANSFER FUNCTION LIMITS<sup>1</sup>

#### **Analog Versions**

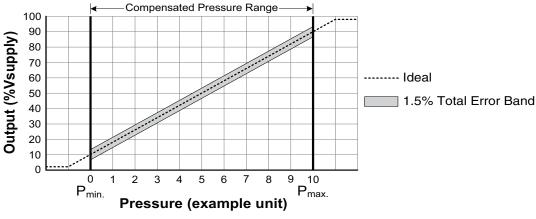

Output (V) = 
$$\frac{0.8 \text{ x Vsupply}}{P_{\text{max.}} - P_{\text{min.}}} x \text{ (Pressure}_{\text{applied}} - P_{\text{min.}}) + 0.10 x \text{ Vsupply}$$

#### **Digital Versions**

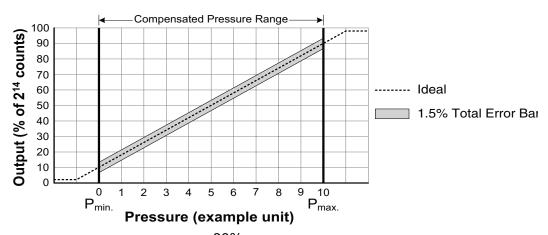


Output (% of 2<sup>14</sup> counts) = 
$$\frac{80\%}{P_{\text{max.}} - P_{\text{min.}}} x \text{ (Pressure}_{\text{applied}} - P_{\text{min.}}) + 10\%$$

<sup>&</sup>lt;sup>1</sup>Transfer Function "A" is shown. See Figure 3 for other available transfer functions.

#### **VENTILATOR APPLICATIONS**

#### FIGURE 3. NOMENCLATURE AND ORDER GUIDE

For example, **ABPDNNN150PGAA3** defines an ABP Series Amplified Basic Pressure Sensor, DIP package, NN pressure port, dry gases only, no diagnostics, 150 psi gage pressure range, analog output type, 10% to 90% of Vsupply (analog), transfer function, no temperature output, no sleep mode, 3.3 Vdc supply voltage.

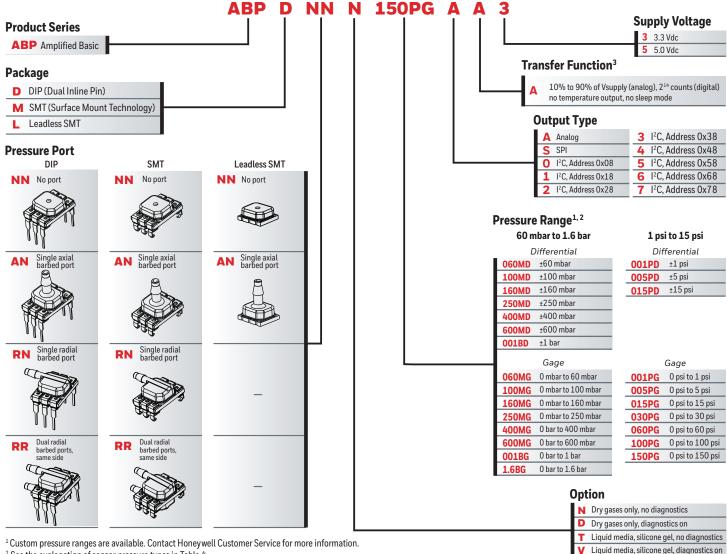

<sup>&</sup>lt;sup>2</sup> See the explanation of sensor pressure types in Table 4.


<sup>&</sup>lt;sup>3</sup> The transfer function limits define the output of the sensor at a given pressure input. By specifying Pmin. and Pmax., the output at Pmin. and Pmax., the complete transfer function of the sensor is defined. See the graphical representations of the transfer function in Figure 3.

#### **VENTILATOR APPLICATIONS**

TABLE 7. PRESSURE RANGE SPECIFICATIONS										
PRESSURE	PRESSUE	RE RANGE	UNUT	OVERPRESSURE <sup>1</sup>		BURST PF	соммон			
RANGE (SEE FIGURE 3.)	PMIN.	РМАХ.	UNIT	PORT 1 (P1)	PORT 2 (P2)	PORT 1 (P1)	PORT 2 (P2)	MODE PRESSURE <sup>3</sup>		
	60 mbar to 1.6 bar									
Differential										
060MD	-60	60	mbar	2000	850	3500	1000	10000		
100MD	-100	100	mbar	4000	1400	7000	2500	10000		
160MD	-160	160	mbar	4000	1400	7000	2500	10000		
250MD	-250	250	mbar	10000	2000	19000	4000	10000		
400MD	-400	400	mbar	10000	2000	19000	4000	10000		
600MD	-600	600	mbar	17000	2000	19000	4000	10000		
001BD	-1	1	bar	17	4	19	8	17		
				Gage	е					
060MG	0	60	mbar	2000	_	3500	_	5500		
100MG	0	100	mbar	2000	_	3500	_	10000		
160MG	0	160	mbar	2000	_	3500	_	10000		
250MG	0	250	mbar	4000	_	7000	_	10000		
400MG	0	400	mbar	10000	_	19000	_	10000		
600MG	0	600	mbar	10000	_	19000	_	10000		
001BG	0	1	bar	17	_	19	_	17		
1.6BG	0	1.6	bar	17	_	19	_	17		
1 psi to 15 psi										
				Differe	ntial					
001PD	-1	1	psi	30	10	50	15	150		
005PD	-5	5	psi	150	30	275	40	150		
015PD	-15	15	psi	250	60	275	120	250		
030PD	-30	30	psi	250	120	275	240	250		
060PD	-60	60	psi	250	250	275	275	250		
				Gago	e					
001PG	0	1	psi	30	-	50	_	150		
005PG	0	5	psi	150	_	275	_	150		
015PG	0	15	psi	250	-	275	-	250		
030PG	0	30	psi	250	_	275	_	250		
060PG	0	60	psi	250	_	275	_	250		
100PG	0	100	psi	250	_	275	_	250		
150PG	0	150	psi	250	_	275	_	250		
O		1	C 1	1: 1: 1:	1 . 6					

<sup>&</sup>lt;sup>1</sup>Overpressure: The maximum pressure which may safely be applied to the product for it to remain in specification once pressure is returned to the operating pressure range. Exposure to higher pressures may cause permanent damage to the product. Unless otherwise specified this applies to all available pressure ports at any temperature with the operating temperature range.

#### FIGURE 4. RECOMMENDED FILTER CAP




<sup>&</sup>lt;sup>2</sup>Burst pressure: The maximum pressure that may be applied to the specified port (P1 or P2) of the product without causing escape of pressure media. Product should not be expected to function after exposure to any pressure beyond the burst pressure.

<sup>&</sup>lt;sup>3</sup>Common mode pressure: The maximum pressure that can be applied simultaneously to both ports of a differential pressure sensor without causing changes in specified performance.


#### **VENTILATOR APPLICATIONS**

FIGURE 5. DIP PACKAGE DIMENSIONAL DRAWINGS (FOR REFERENCE ONLY: MM [IN].)

**DIP NN:** No port

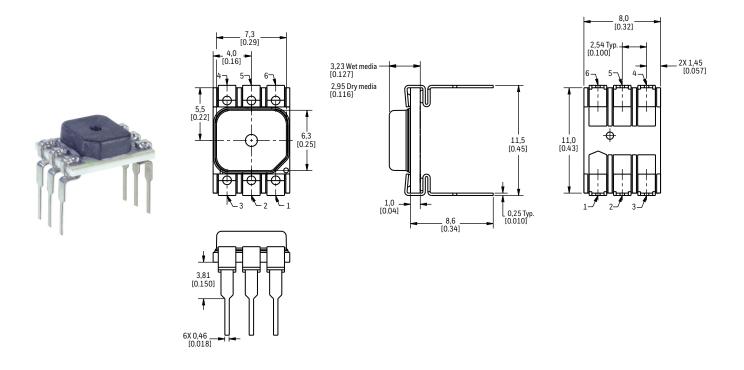

**DIP AN:** Single axial barbed port

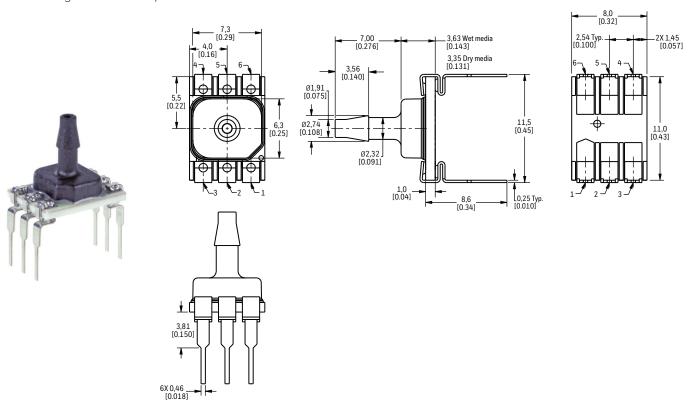


#### **VENTILATOR APPLICATIONS**


#### FIGURE 5. DIP PACKAGE DIMENSIONAL DRAWINGS (CONTINUED)

**DIP RN:** Single radial

barbed port

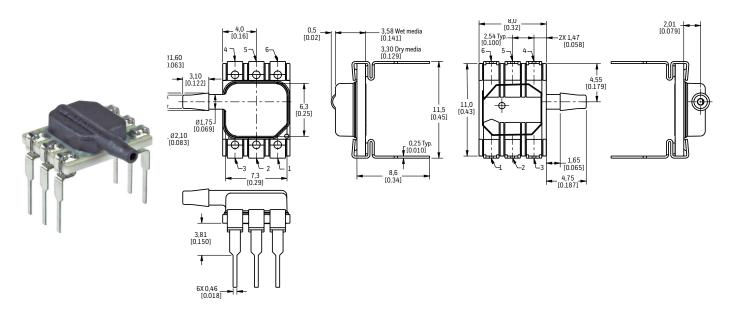

**DIP RR:** Dual radial barbed ports, same side

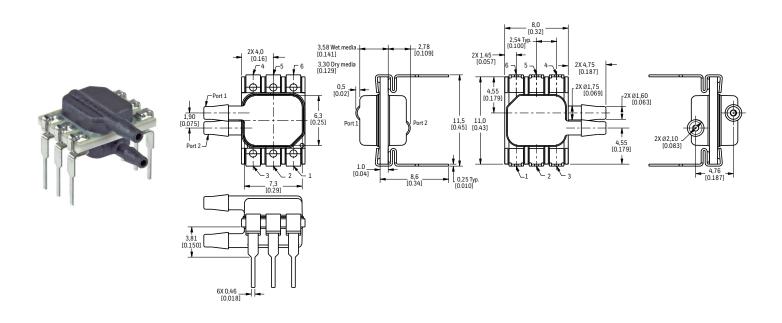


#### **VENTILATOR APPLICATIONS**

#### FIGURE 6. SMT PACKAGE DIMENSIONAL DRAWINGS (FOR REFERENCE ONLY: MM [IN].)


SMT NN: No port



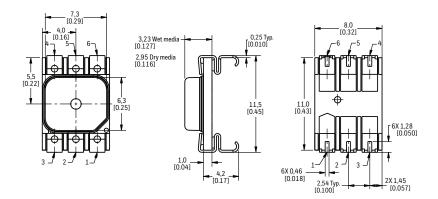


**SMT AN:** Single axial barbed port




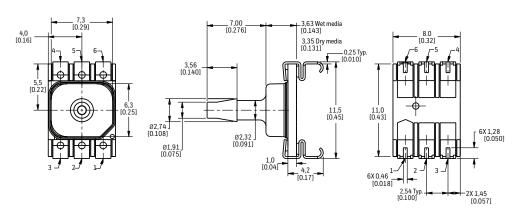

**SMT RN:** Single radial barbed port




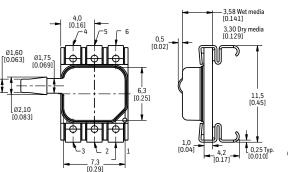




**SMT RR:** Dual radial barbed ports, both sides



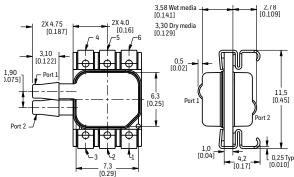

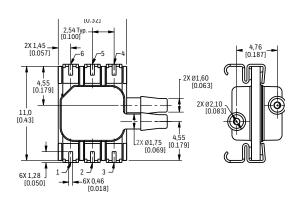


#### **VENTILATOR APPLICATIONS**

#### FIGURE 7. LEADLESS SMT PACKAGE DIMENSIONAL DRAWINGS (FOR REFERENCE ONLY: MM [IN].)

Leadless SMT NN: No port



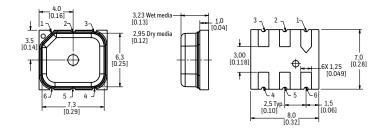

Leadless SMT AN: Single axial barbed port




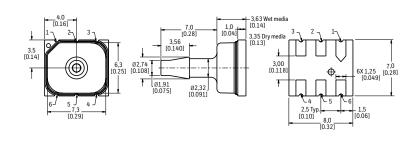



TABLE 8. PINOUTS						
OUTPUT TYPE	PIN 1	PIN 2	PIN 3	PIN 4	PIN 5	PIN 6
I <sup>2</sup> C	GND	$V_{\text{supply}}$	INT	NC	SDA	SCL
SPI	GND	$V_{supply}$	SS	NC	MISO	SCLK
analog	GND	NC	$V_{out}$	NC	NC	$V_{\text{supply}}$

#### FIGURE 8. RECOMMENDED PCB LAYOUTS DIP

Gage reference hole: do not plug 6X Ø0 73 [0.029] 6,00 [0.236] 11,25 [0.443] 11,0 [0.433] 5,00 [0.197] 2,73 [0.107]

8,00 [0.315]





Leadless SMT

#### **ADDITIONAL MATERIALS**

The following associated literature is available at sensing.honeywell.com:

- Product range guide
- Installation instructions
- Application note

#### FOR MORE INFORMATION

Honeywell Sensing and Internet of Things services its customers through a worldwide network of sales offices and distributors. For application assistance, current specifications, pricing or the nearest Authorized Distributor, visit sensing.honeywell.com or call:

USA/Canada +1 302 613 4491 Latin America +1 305 805 8188 Europe +44 1344 238258 Japan +81 (0) 3-6730-7152

Singapore +65 6355 2828 Greater China +86 4006396841

#### WARRANTY/REMEDY

Honeywell warrants goods of its manufacture as being free of defective materials and faulty workmanship during the applicable warranty period. Honeywell's standard product warranty applies unless agreed to otherwise by Honeywell in writing; please refer to your order acknowledgment or consult your local sales office for specific warranty details. If warranted goods are returned to Honeywell during the period of coverage, Honeywell will repair or replace, at its option, without charge those items that Honeywell, in its sole discretion, finds defective.

The foregoing is buyer's sole remedy and is in lieu of all other warranties, expressed or implied, including those of merchantability and fitness for a particular purpose. In no event shall Honeywell be liable for consequential, special, or indirect damages.

While Honeywell may provide application assistance personally, through our literature and the Honeywell web site, it is buyer's sole responsibility to determine the suitability of the product in the application.

Specifications may change without notice. The information we supply is believed to be accurate and reliable as of this writing. However, Honeywell assumes no responsibility for its use.

### **⚠ WARNING**PERSONAL INJURY

DO NOT USE these products as safety or emergency stop devices or in any other application where failure of the product could result in personal injury.

Failure to comply with these instructions could result in death or serious injury.

## **⚠ WARNING**MISUSE OF DOCUMENTATION

- The information presented in this product sheet is for reference only.
   Do not use this document as a product installation guide.
- Complete installation, operation, and maintenance information is provided in the instructions supplied with each product.

Failure to comply with these instructions could result in death or serious injury.

#### Honeywell Sensing and Internet of Things

830 East Arapaho Road Richardson, TX 75081 sensing.honeywell.com

