

Sulfur Dioxide (SO₂) Gas Sensor Part Number: AD045-H04

Product Data Sheet

Product Datasheet

A3STF Sulfur Dioxide Sensor

Document Purpose

The purpose of this document is to present the performance specification of the A3STF sulfur dioxide gas sensor.

This document should be used in conjunction with Operating Principles (OP20) and the Product Safety Datasheet (PSDS 19).

The data provided in this document are valid at 20°C, 50% RH and 1013 mBar for 3 months from the date of sensor manufacture.

Output signal can drift below the lower limit over time. For guidance on the safe use of the sensor, please refer to the Operating Principles (OP20).

Doc. Ref.: a3stf.indd ECN I 4839 Issue 5 22nd May 2017

Web: www.citytech.com Email: sales@citytech.com Call: +44(0) 23 9228 8100

Page 1 of 3





Sulfur Dioxide (SO₂) Gas Sensor Part Number: AD045-H04

Product Data Sheet

Key Features & Benefits

- 4th electrode for compensation of environmental changes
- Electrical connection via PCB pins or solder tags

Technical Specifications

MEASUREMENT

Measurement Range

Operating Principle | 4-electrode electrochemical 0-10 ppm SO₂

Maximum Overload

100 ppm

Filter Sensitivity* To remove H₂S and HCl

 $0.60 \pm 0.12 \, \mu \text{A/ppm}$ < 40 seconds

Response Time (T₉₀)* Baseline Offset (clean air)* 0 to 0.1 ppm equivalent

Linearity Linear

ELECTRICAL

Recommended Load Resistor | 10 O

Bias Voltage | Not Required

MECHANICAL

Weight | 22 g nominal

Housing Material | Polycarbonate

Pin Material | Mild steel with gold flash

over nickel plate

Orientation | Any

ENVIRONMENTAL

Typical Applications | Ambient Environmental Monitoring

Operating Temperature Range | -20°C to +50°C Recommended Storage Temp | 0°C to 20°C

Operating Pressure Range | Atmospheric ± 10%

Pressure Coefficient | 0.020 ± 0.008 % signal/mBar Operating Humidity Range | 15 - 90% RH non-condensing


LIFETIME

Expected Operating Life Three years in air

Long Term Sensitivity Drift | < 10% signal loss/year

Storage Life 6 months in CTL container

Product Dimensions

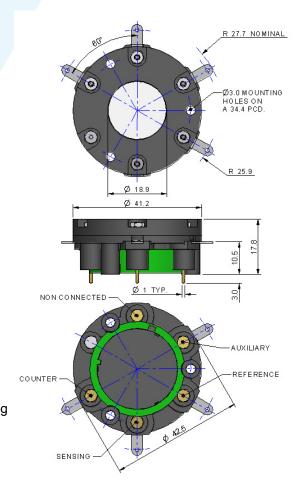

All dimensions in mm All tolerances ±0.15 mm unless otherwise stated

IMPORTANT NOTE: Connection should be made via PCB sockets only. Soldering to the pins will seriously damage your sensor.

* Specifications are valid at 20°C, 50% RH and 1013 mBar, using City Technology recommended circuitry. Performance characteristics outline the performance of sensors supplied within the first 3 months. Output signal can drift below the lower limit over time.

Doc. Ref.: a3stf.indd ECN I 4839 Issue 5

22nd May 2017

Page 2 of 3





Sulfur Dioxide (SO₂) Gas Sensor Part Number: AD045-H04

Product Data Sheet

Poisoning

CiTiceLs are designed for operation in a wide range of environments and harsh conditions. However, it is important that exposure to high concentrations of solvent vapours is avoided, both during storage, fitting into instruments and operation.

When using sensors with printed circuit boards (PCBs), degreasing agents should be used before the sensor is fitted. Do not glue directly on or near the CiTiceL as the solvent may cause crazing of the plastic.

Cross Sensitivity Table

Whilst CiTiceLs are designed to be highly specific to the gas they are intended to measure, they will still respond to some degree to various other gases. The table below is not exclusive and other gases not included in the table may still cause a sensor to react.

IMPORTANT NOTE: The cross sensitivity data shown below does not form part of the product specification and is supplied for guidance only. Values quoted are based on tests conducted on a small number of sensors and any batch may show significant variation. For the most accurate measurements, an instrument should be calibrated using the gas under investigation.

Gas	Cross Interference
Carbon Monoxide CO	None
Hydrogen Sulfide H ₂ S	None
Nitrogen Dioxide NO ₂	-100%

SAFETY NOTE

This sensor is designed to be used in safety critical applications. To ensure that the sensor and/or instrument in which it is used, are operating properly, it is a requirement that the function of the device is confirmed by exposure to target gas (bump check) before each use of the sensor and/or instrument. Failure to carry out such tests may jeopardize the safety of people and property.

Every effort has been made to ensure the accuracy of this document at the time of printing. In accordance with the company's policy of continued product improvement City Technology Limited reserves the right to make product changes without notice. The products are always subject to a programme of improvement and testing which may result in some changes in the characteristics quoted. As the products may be used by the client in circumstances beyond the knowledge and control of City Technology Limited, we cannot give any warranty as to the relevance of these particulars to an application. It is the clients' responsibility to carry out the necessary tests to determine the usefulness of the products and to ensure their safety of operation in a particular application.

Doc. Ref.: a3stf.indd ECN I 4839 Issue 5

22nd May 2017

Page 3 of 3

