

FFT-FPJ

Fire Fighters Telephone Phone Jack

The FFT-FPJ remote Firefighter Phone Jack provides a quick connect to the IFP-FFT fire fighter telephone system using a FFT-RHS remote handset.


The FFT-FPJ are wired to the IFP-FFT Fire Fighter Telephone System audio circuit. A monitor module detects the connection and its address will turn on the corresponding IFP-FFT zone LED and PZT will sound. Pressing the answer switch will connect the local handset to the phone circuit allowing communication with the remote handset

COMPATIBILITY

The FFT-FPJ is compatible with the IFP-FFT. Firefighters Telephone System.

INSTALLATION

The FFT-FPJ Fire Fighter Phone Jack mounts to a single-gang electrical box (4" x 2-1/8" x 2 1/2") or when the addressable mini-monitor module is installed with it, a deep single-gang electrical box (4" x 2-1/8" x 3 3/4"). For detailed installation instructions see IFP-FFT installation manual P/N 54708.

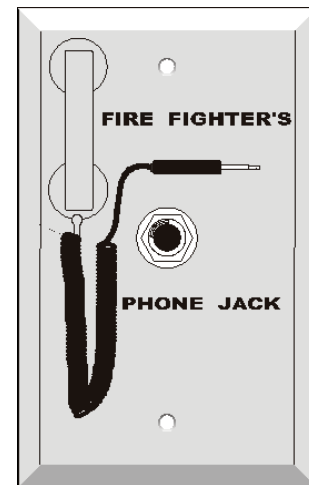

FEATURES & BENEFITS

- Single Telephone Station Mount comes in a lockable cabinet containing one remote handset. Available in Recessed mount (FFT-STSR) or surface mount (FFT-STSS).
- Color coded wires, 6 inches long, are prewired to the jack to enable fast and accurate wiring to the system.

FFT-FPJ Technical Specifications

PHYSICAL

Dimensions: 4¾" W x 2¾" H x 1½" D (12.065 x 6.985 x 3.81 cm)

ENVIRONMENTAL

Operating Temperature: 32°F-120°F (0°C – 49°C)

Humidity: 10% – 93% noncondensing

ELECTRICAL

The FFT-FPJ is a passive device that does not draw current

AGENCY LISTINGS AND APPROVALS

UL: Listed

CSFM: 7300-0559:0167

ORDERING INFORMATION

IFP-FFT: Fire Fighters Telephone

IDP-Minimon: Mini-Monitor module

IDP-ISO: Fault Isolator module

MISCELLANEOUS ACCESSORIES

FFT-24: 24 Zone Expander

FFT-FPJ : Remote Phone Jack

FFT-RHS : Fire Fighters Remote Hand Set

FFT-HSC: Fire Fighters Handset Cabinet. Holds up to 10 remote handsets

FFT-STSR: Single Telephone Station Recessed. A lockable cabinet containing one remote handset.

FFT-STSS: Single Telephone Station Surface Mount. A lockable cabinet containing one remote handset.

FFT-BGK: Break Glass Kit for FFTSTS

VIP-TR: Flush Mount Trim Ring

For a complete listing of all compliance approvals and certifications, please visit www.farenhyt.com.

Microsoft, Windows, and the Windows Logo are registered trademarks or trademarks of Microsoft Corporation.

Honeywell® is a registered trademark of and Farenhyt™ is a trademark of Honeywell International, Inc.

This document is not intended to be used for installation purposes. We try to keep our product information up-to date and accurate. We cannot cover all specific applications or anticipate all requirements. All specifications are subject to change without notice.

For Technical Support, call 800-446-6444.

For more information

Learn more about Honeywell's Farenhyt Series and other products available by visiting www.farenhyt.com

Honeywell Farenhyt

12 Clintonville Road
Northford, CT 06472
800-328-0103