

Honeywell

UEMConnect Settings

for Honeywell Mobile Devices powered by Android™

User Guide

Disclaimer

Honeywell International Inc. (“HII”) reserves the right to make changes in specifications and other information contained in this document without prior notice, and the reader should in all cases consult HII to determine whether any such changes have been made. The information in this publication does not represent a commitment on the part of HII.

HII shall not be liable for technical or editorial errors or omissions contained herein; nor for incidental or consequential damages resulting from the furnishing, performance, or use of this material.

This document contains proprietary information that is protected by copyright. All rights are reserved. No part of this document may be photocopied, reproduced, or translated into another language without the prior written consent of HII.

©2021 Honeywell International Inc. All rights reserved.

Android is a trademark of Google Inc.

Other product names or marks mentioned in this document may be trademarks or registered trademarks of other companies and are the property of their respective owners.

Web Address: www.honeywellaidc.com

Patents

For patent information, please refer to www.honeywellaidc.com/patents

TABLE OF CONTENTS

Customer Support and Warranty	xiii
Technical Assistance	xiii
Product Service and Repair	xiii
Limited Warranty	xiii
Chapter 1 - About UEMConnect	1
Overview	1
What's New in UEMConnect?	1
What was added in V5?	1
Chapter 2 - Download File from Source to Destination	3
Chapter 3 - Applications	5
General Settings	5
Whitelist/Blacklist Apps	5
Operational Intelligence Settings	6
Agent Connect Direct Settings	6
Chapter 4 - Display Settings	7
Adaptive Brightness	7
Brightness Level	7
Display Sleep	8
Accelerometer Rotation	8
Full Accelerometer Rotation	9
Density Smallest Width	9
Font Size	10
Enable Wi-Fi Display	10
Wallpaper	10
Daydream	11
Enable Screensaver	11
Screensaver Components	11

Chapter 5 - Input and Output Settings13

LED Settings	13
Battery LED Mode	13
Key Remap and Wakeup Settings	13
Key Remap Settings	13
Wakeup Key Settings	14
Clear All Key Remap Settings	15
Sticky (Keys) Options	16
Touch Settings	16
Touch Panel Mode	16
Storage Settings	17
SD Card Access Enabled	17
USB Settings	17
Lock USB Mode	17
Disable USB Pop Up	17
Heater Settings	18
Enable Heater	18
DeltaT	18
EnableT	18
DisableT	19
DurationHeater	19
SampleTimes	19
SlowInterval	20
FastInterval	20
ChillTime	21
DurationLcd(s)	21
DurationScan	22
LowBatteryPercent	22
PoweronTime	22
Preemptive	23
PreemptiveDelay	24
PreemptiveDuty	24
DriverMode	25
KeyBlanking	25
Defroster Settings	26
Enable Defroster	26
Defroster Trip Point	26
Defroster Operation Mode	26
Defroster State	27
Vehicle Dock Settings	27
VDock Mode	27

Chapter 6 - Device Management Settings 29

Honeywell Launcher Placeholder	29
HLPH Password	29
Clear HLPH Password	29
Auto Install Settings	30
Auto Install	30
Auto Install Notification	30
Auto Install Verify Apps	31
EZConfig Settings	31
Enable User Password	31
User Password	31
Honeywell Provisioning Mode Settings	32
Provisioning Mode	32
Provisioning Mode Password Settings	32
Provisioning Mode Whitelist Applications	32
Provisioning Intents Unrestricted	33
Honeywell Restriction settings	33
Restrictions - Emergency Settings	33
Hide Emergency Button	33
Disable Emergency Alerts	34
Disable Amber Alerts	34
Disable Extreme Alerts	34
Disable Severe Alerts	35
Restrictions - Network Settings	35
Restrict Network Location Provider	35
Restrict Roaming Data	36
Restrictions - Notification Settings	36
Restrict Cacert Notification	36
Restrict Notification LED	37
Restrict System Notification	37
Restrictions - Quick Menu Settings	38
Hide Wi-Fi	38
Hide Bluetooth	38
Hide Do Not Disturb	39
Hide Cellular	39
Hide Airplane Mode	40
Hide Auto Rotate	40
Hide Flashlight	41
Hide Location	41
Hide Cast	42
Restrict Settings	42
Restrict Battery	43

Restrict Multi-User	43
Restrictions - Storage Settings	44
Restrict SD Card Access	44
Restrictions - MDM Settings	44
Restrict Factory Reset in Boot Menu	44
Disable Android Share Option	45
Restrict Clipboard	45
Restrict Guest User	45

Chapter 7 - Network Settings 47

Network Settings	47
DHCP Host Name	47
Captive Portal HTTPS URL	47
Background Data Setting	48
Airplane Mode On	48
NFC Settings	49
Beam Enabled	49
NFC Enabled	49
Mobile Data Enable	50
Ethernet Settings	50
Ethernet Enable	50
Static or DHCP Selection	50
Static IP Value	51
Network Prefix Length	51
Gateway	51
DNS 1	51
DNS 2	52
Proxy Name	52
Proxy Port	52
Bypass Proxy	53
Wi-Fi Settings	53
Wi-Fi Frequency Band	53
Wi-Fi ESE Enable	54
Wi-Fi FT Enable	54
Data Stall Recovery	55
Wi-Fi gDot11 Mode	55
Wi-Fi Power Save	56
Wi-Fi gP2P Enabled	56
Wi-Fi WMM Configuration	57
Wi-Fi Beacon Loss	57
Force Wi-Fi Priority	57
Wi-Fi Operating Channel Enable	58

Select the channels	58
RSSI Threshold	58
RSSI Difference	59
Roaming Band	59
Reset Roaming Parameters	59
WLAN Country Code	60
Clear WLAN Country Code	60
Wi-Fi Available Notification Enabled	60
Wi-Fi Enabled	61
WWAN Settings	61
Cellular Data Enabled	61
Roaming Data Enabled	62
WWAN APN Profile	62
Name	62
APN	62
APN Proxy	63
Port	63
Username	63
APN Password	64
Server	64
MMSC	64
MMS Proxy	64
MMS Port	65
MCC	65
MNC	65
Authentication Type	66
Type	66
Protocol	66
Roaming Protocol	67
Bearer	67
MVNO Type	68
MVNO Match Data	68
Bluetooth Settings	69
Bluetooth Whitelist Enabled	69
Add Bluetooth Whitelist	69
Clear Bluetooth Whitelist	70
Bluetooth Device Name	70
Enable Bluetooth Silent Pairing	70
Bluetooth Enable	71
Bluetooth FTP Profile	71

Chapter 8 - Scanner Settings **73**

Suppress Prompt for ScanHandle	73
Key Repeat Disable	73
Chapter 9 - System Settings	75
OS SDK Setting	75
Date and Time	75
Auto Time	75
Time Format	76
Date and Time	76
Select Time Zone	76
Sets the Time from NTP	76
Show NTP Server Option	77
Doze Mode	77
Doze Mode Settings	77
Logger Settings	78
HXLogger Settings	78
HXLogger Settings	78
Logger Path	78
ANR Plugin	79
Tombstone Plugin	79
TCPDump Plugin	79
TCPDump Interface Value	80
Enable Snapshot Plugin	80
Snapshot Log Interval	80
Snapshot Log Keep Time	80
Enable SnapShot topcmd	81
Enable SnapShot CPUInfo	81
Enable SnapShot MemInfo	81
Enable SnapShot DiskInfo	82
Enable SnapShot ProcessInfo	82
Enable Dumpsys Plugin	82
Dumpsys Log Interval	83
Dumpsys Log KeepTime	83
Enable Dumpsys AudioInfo	83
Enable Dumpsys Battery Info	84
Enable Dumpsys Mem Info	84
Enable Dumpsys Location Info	84
Enable Dumpsys Wi-Fi Info	85
Enable Dumpsys Wi-Fi Scanner Info	85
Enable Dumpsys Power Info	85
Enable DiagMdLog Plugin	86
Enable Camera Plugin	86

Language and Input Settings	87
Locale Country	87
Locale Language	87
Default Input Method	87
Show Hardware Input Method	88
Enable Keyboard Suggestion	88
EnablePublixSetting HonKeyboard	88
Autofill Service	89
Enable Google Keyboard Emoji	89
Enable Keypress Sound for Physical Keyboard	89
Vibrate on Key Press	90
Pointer Speed	90
Spell Checker Enabled	90
Selected Spell Checker	91
Enabled Input Methods	91
Text to Speech	92
TTS Default Rate	92
Location	92
Wi-Fi Scan Always Enabled	92
Bluetooth Low Energy Scan Always Enabled	93
Location Settings	93
Printing Configuration	94
Enable Cloud Print Service	94
Screen Lock Settings	94
None	94
Saved Screen Lock Password	94
Secure Start-Up Enabled	94
Password Quality	95
Screen Lock Password	95
Clear Screen Lock Password	95
Security	95
Lock on Power Key Press Always Enabled	95
Silently Activate Device Admin Applications	96
Show Password Enabled	96
Users	96
Add Users From Locked Screen Enabled	96
Sound and Notification Settings	97
Haptic Feedback Enabled	97
Alarm Volume	97
Music Volume	97
Ring Volume	98
Vibrate When Ringing	98
Notification Sound	98

Ringtone Sound	99
DTMF Tone Enabled	99
Sound Effects Enabled	99
Lockscreen Sounds Enabled	100
Charging Sounds Enabled	100
Show Notifications On Locked Screen Enabled	100
Power Mode Settings	101
Power Mode	101
Switch State to Sleep	102
Switch State to Shutdown	103
Unattended Mode	104
Web Applications SDK	104
Port	104
Enabled	104
Accessibility	105
Accessibility Display Magnification Enabled	105
High Text Contrast Enabled	105
In-Call Power Button Behavior	106
Long Press Timeout	106
Accessibility Display Inversion Enabled	106
Accessibilty Captioning	107
Accessibility Captioning Locale	107
Accessibility Captioning Font Scale	107
Accessibility Display Daltonizer	108
Accounts	108
Data Auto-Sync	108
Battery	109
Battery Upper Limit	109
Battery Lower Limit	109
UPS30BAY	110
Enable Fast Charge	110
Sensors	110
Keep Device Awake on Motion Detection	110
Wake Device Up on Motion Detection	111
Suspend Device When Face Down	111
Developer Settings	112
Bluetooth HCI Log	112
Enable Bug Report	112
Enable View Attributes	113
Enable Show Taps	113
Show Pointer Location	113
USB Audio Automatic Routing Disabled	114
Enable All ANR Visibility	114

Aggressive Wi-Fi To Mobile Handover	114
Keep Mobile Data Always Active	115
Boot From Charger Mode	115
Enable ADB	115
Chapter 10 - System Update Settings	117
OS Update Package URL	117
Enable OS Downgrade with Enterprise Reset	117
Chapter 11 - Data Collection Settings	119
Data Processing Settings	119
Data Editing Plugin	119
Data Editing Plugin	119
Editing Settings	119
Data Intent	120
Action	120
Category	120
Class Name	120
Data Intent	121
Package Name	121
Charset	121
Launch Browser	122
Launch EZConfig	122
Prefix	123
Scan to Intent	123
Suffix	123
Symbology Prefix	124
Wedge as keys	124
Wedge	124
Decode Settings	125
Center Decode	125
Window Bottom	125
Window Left	125
Window Right	126
Window Top	126
Decode Security	126
Decode Set	126
DPM Mode	127
Region of Interest	127
Video Mode	128
Imager Settings	128

Exposure Mode	128
Exposure (μ s)	128
Gain	129
Illumination Intensity	129
Maximum Exposure Time (μ s)	129
Maximum Gain	129
Override Recommended Values	130
Rejection Limit	130
Sampling Method	130
Target Acceptable Offset	131
Target Percentile	131
Target Value	131
Notification Settings	132
Bad Read Notification	132
Good Read Notification	132
Vibrate on Notification	133
Trigger Settings	133
Same Symbol Timeout	133
Enable Same Symbol Timeout	133
Same Symbol Timeout	134
Decode Timeout	134
Enable Scan Trigger	134
Scan Delay	135
Trigger Scan Mode	135

Customer Support and Warranty

Technical Assistance

To search our knowledge base for a solution or to log in to the Technical Support portal and report a problem, go to www.honeywellaidc.com/working-with-us/contact-technical-support.

For our latest contact information, see www.honeywellaidc.com/locations.

Product Service and Repair

Honeywell International Inc. provides service for all of its products through service centers throughout the world. To obtain warranty or non-warranty service, return your product to Honeywell (postage paid) with a copy of the dated purchase record. To learn more, go to www.honeywellaidc.com and select **Service & Repair** at the bottom of the page.

Limited Warranty

For warranty information, go to www.honeywellaidc.com and click **Resources > Product Warranty**.

ABOUT UEMCONNECT

Overview

Honeywell UEMConnect makes use of the Google OEMConfig protocol by providing standardized development for EMMs and giving access to Honeywell proprietary features. EMMs making use of Google OEMConfig and Honeywell UEMConnect are enabled to provide access to Honeywell proprietary features via the EMM console.

For more information about OEMConfig, see support.google.com/work/android/answer/9388447?hl

UEMConnect provides exclusive access to over 260 advanced Honeywell proprietary settings and provides supplemental access to standard EMM features. Alternatively, EMM providers may make use of generic Android APIs to provide standard EMM functionality. A UEMConnect license is needed for the Honeywell advanced proprietary device settings and in the future, proprietary device data is used to create valuable insights. See [Honeywell UEMConnect - Settings](#) for a complete list of features that are exclusively available with a UEMConnect license.

Honeywell UEMConnect is available for download in the Google Play Store. UEMConnect licenses are included with the purchase of applicable SOTI offerings through Honeywell or may be purchased separately for applicable EMM solutions not purchased through Honeywell.

What's New in UEMConnect?

Over 260 exclusive UEMConnect features in Android 10.

What was added in V5?

Download File from Source to Destination

Added the below settings for V5:

- Heater Settings
- Screen Lock Settings
- Show Rotation Suggestions
- Disable USB Popup

- Ethernet Proxy Type
- Ethernet Proxy URL
- Wifi Data Stall Recovery
- Mobile Data Enable
- Key Repeat Disable
- Enable Google Keyboard Emoji
- Silently Activate Device Admin
- UPS30BAY
- Enable Fast Charge

DOWNLOAD FILE FROM SOURCE TO DESTINATION

This setting allows a user to download files from the source location to the destination location and run specific intents on the device.

It can also be used to reboot the device from the UEMConnect restrictions.

Source File Path: Provide the Source File Path (specify the full path of the file from the server (http://, https://, ftp:// and file://) or device).

Destination Path: Provide the Destination Path for the device (e.g., /storage/emulated/0/honeywell/autoinstall/).

Run Intent: Run Intent activity manager commands here.

Reboot Required: Set this flag to true if reboot is required.

General Settings

Whitelist/Blacklist Apps

Whitelist/Blacklist Apps allows the user to configure which system applications can/cannot be used on a device.

Use colon (:) to separate multiple entries.

To add or remove applications to (from) whitelist/blacklist, select a desired option from the list.

The setting has two options:

- **0** = Add applications to White or Blacklist.
- **1** = Remove applications from White or Blacklist.

Value

To whitelist/blacklist an application, specify the value WhiteApps or BlackApps and provide the name that identifies the system application, and then specify to add or remove application.

For example:

Example 1: WhiteApps=com.android.chrome:com:1.

Example 2: BlackApps=com.android.chrome:com:0.

To whitelist/blacklist more applications, specify the value WhiteApps or BlackApps and provide the application names using colon(:) as a separator then specify to add or remove applications.

For example:

Example 1: WhiteApps=com.android.chrome:com.honeywell.tools.battmon:1

Example 2: BlackApps=com.android.chrome:com.honeywell.tools.battmon:0

Operational Intelligence Settings

Agent Connect Direct Settings

This setting enables the device to collect and send certain technical information (for example: Battery charge, Connectivity, and Location) concerning the device and its usage to Honeywell.

To enable or disable the Agent Connect Direct Settings, select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Agent Connect Direct Settings on the device.
- **Disable** will deactivate the Agent Connect Direct Settings on the device.

Value

Disable

DISPLAY SETTINGS

Adaptive Brightness

This setting allows the device to automatically adjust the brightness of the display based on the light reaching the device's ambient light sensor.

To enable or disable Adaptive Brightness setting on the device, select a desired option from the drop-down list box.

The setting has two options:

- **Enable** will activate the Adaptive Brightness setting on the device.
- **Disable** will deactivate the Adaptive Brightness setting on the device.

Value

Disable

Brightness Level

Brightness level is the perceived intensity of light coming from the screen of the device.

This setting allows the user to set the screen brightness of the device to a desired level. The screen back light brightness ranges from 0 to 255.

You can type a desired brightness value within the range in the text box provided.

Value

255

Display Sleep

Display Sleep is the time limit after which the device will timeout and automatically turn the display screen off.

To select the display time out value:

Select a timeout value to be configured to the device from the display timeout list provided from the dropdown:

15 seconds, 30 seconds, 1 minute, 2 minutes, 5 minutes, 10 minutes, 30 minutes.

Value

10 minutes

Accelerometer Rotation

Accelerometer Rotation controls the rotation of the screen of the device to portrait mode or landscape mode.

You need to set the value for 'Full Accelerometer Rotation' setting to "Do not Allow" to make changes in this setting.

Note: This setting is not applicable for VM1A.

Select a desired option to be configured from the drop-down list box provided.

Reboot the device to apply the changes.

The setting has two options:

- **Stay In Portrait View**
- **Allow Accelerometer Rotation**

Value

Stay in Portrait View

Full Accelerometer Rotation

This setting is used to enable or disable Full Accelerometer Rotation on the device.

You need to set the value for 'Accelerometer Rotation' setting to "Allow Accelerometer Rotation" to make changes in this setting.

Note: This setting is not applicable for VM1A.

Select a desired option to be configured from the drop-down list box provided. Reboot the device to apply the changes.

The setting has two options:

- **Allow** will enable Full Accelerometer Rotation on the device.
- **Do not Allow** will disable Full Accelerometer Rotation on the device.

Show Rotation Suggestions: Enable/Disable Show rotation suggestions.

Value

Allow

Density Smallest Width

This setting allows you to set the smallest width for density on the device. This value should be more than 0.

You can type a desired value in the text box provided.

Value

1

Font Size

In the font size list, select the required font size to be configured to the device from the drop-down list box provided.

The setting has four options:

- **Small**
- **Normal**
- **Large**
- **Huge**

Value

Normal

Enable Wi-Fi Display

Wi-Fi Display is a technology to display a device's content to another device over Wi-Fi.

This setting is used to enable or disable Wi-Fi Display option on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Wi-Fi Display option on the device.
- **Disable** will deactivate the Wi-Fi Display option on the device.

Value

Enable

Wallpaper

This setting allows the user to set a desired wallpaper on the device.

You can type the path of the wallpaper in the text box provided.

Value

/data/system/users/0

Daydream

Enable Screensaver

This setting allows the user to enable or disable the Screensaver option on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Screensaver option on the device.
- **Disable** will deactivate the Screensaver option on the device.

Value

Enable

Screensaver Components

This setting allows the user to select a desired Screensaver Component on the device.

Select a desired option from the drop-down list box provided.

The setting has five options:

- **Clock**
- **Colors**
- **Photo Frame**
- **Photo Table**
- **Photo**

Note: 'Photo Frame' and 'Photo Table' options are not supported on Nougat.

Value

Clock

LED Settings

Battery LED Mode

To select a Battery LED mode, click on the desired option to be configured to the device from the list.

The setting has three options:

- **0** = Default Battery LED
- **1** = HSM Battery LED
- **2** = No Battery LED

Use this setting for displaying different color LED's when the device is put to charge or in low battery.

Value

2

Key Remap and Wakeup Settings

Key Remap Settings

This setting enables the user to configure the physical keys on the device to different functions and other behaviors.

You must specify the mapping behaviors to be mapped to the identified physical key. If any prior mappings were applied, they will be replaced by the new specified behaviors.

The added key_names can be obtained from keyremap UI on the device.

This setting allows two types of key mapping on the device:

- The old key can be mapped to new key.
- The old key can be mapped to an application.

Value

To remap a single physical key on the device, provide the physical key name and specify the value of new key or application to be configured.

Example 1: RightScan-ENTER

Example 2: LeftScan-com.honeywell.demos.scandemo

The physical key RightScan is mapped to the Enter function on the device and the key LeftScan is mapped to an application.

To remap multiple physical keys on the device, use colon(:) in between each key remap.

For example: RightScan-ENTER:LeftScan-com.honeywell.demos.scandemo

Wakeup Key Settings

This setting allows the user to configure the Key wakeup sequence on the device.

To enable a Wakeup Key sequence on the device, enter a desired value in the textbox provided.

The setting has two options to configure the sequence:

- **0** = Disabled
- **1** = Enabled

Value

1000, 1010, 1001


For example: The model CT40 has four Key sequences as Wakeup keys, i.e., 257, 261, 115 and 114.

If the value of the setting is set to **1000**, then only the first key sequence, i.e., 257, will behave as the wakeup key and the other three keys, i.e., 261, 115 and 114, will not work as wakeup keys.

Note: The number of Wakeup Keys that can be set for a device is specific to the device and differs from one to another.

For Example:

On a CT40 device: If this setting is set to 0011, this will Disable Left Scan, Right Scan and Enable Volume Up and Volume Down as below.

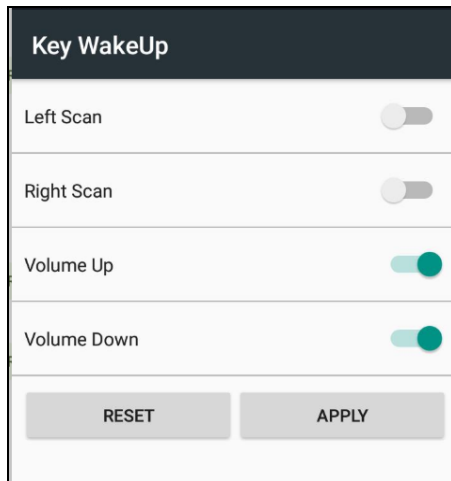

Clear All Key Remap Settings

This setting allows the user to clear all existing key mappings on the device.

To enable or disable the Clear All Key Remap Settings, select a desired option from the drop-down list box provided.

- **Enable** will activate the Clear All Key Remap Settings on the device.
- **Disable** will deactivate the Clear All Key Remap Settings on the device.

Value

Enable

Sticky (Keys) Options

This setting makes yellow/orange, blue/green, and caps key sticky after one key press.

Select a desired option to be configured to the device using the drop-down list box provided.

Value

[caps:disable, blue/green:disable, yellow/orange:disable]
[caps:disable, blue/green:disable, yellow/orange:enable]
[caps:disable, blue/green:enable, yellow/orange:disable]
[caps:disable, blue/green:enable, yellow/orange:enable]
[caps:enable, blue/green:disable, yellow/orange:disable]
[caps:enable, blue/green:disable, yellow/orange:enable]
[caps:enable, blue/green:enable, yellow/orange:disable]
[caps:enable, blue/green:enable, yellow/orange:enable]

Touch Settings

Touch Panel Mode

The setting allows the user to select the touch panel mode to be configured to the device.

The setting has four options:

- **0** = Default
- **1** = Stylus enhanced
- **2** = Glove use enhanced
- **3** = Touch enhanced

Value

1

Storage Settings

SD Card Access Enabled

This setting is used to allow or restrict the SD Card access on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will allow the SD Card access on the device.
- **Disable** will restrict the SD Card access on the device.

Value

Enable

USB Settings

Lock USB Mode

This setting is used to lock USB Mode for a particular functionality on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has four options:

- **Not Locked**
- **Lock USB Charging**
- **Lock USB MTP**
- **Lock USB PTP**

Value

Not Locked

Disable USB Pop Up

This setting is used to enable a customer application to access a USB port without prompting the user.

Heater Settings

Use these settings to set the heater configurations of the device.

Enable Heater

Select whether to enable the Heater or not.

The setting has two options:

- **Enable** will allow the Heater access on the device.
- **Disable** will restrict the Heater access on the device.

Value

Enable

DeltaT

This setting is used to determine how many degrees of temperature must change before the heater is allowed to turn on.

Switch on the heater when the temperature has changed by 0.5, (0.5 ~ 5.0), for each step from 0.5.

Value

0.5

EnableT

The Enable Temperature is the setting that determines when the heater is turned on as it rises above the set value.

Set the temperature at which the heater should get enabled, Range: -20 ~ 0, 1 for each step.

Value

-20

DisableT

Set the temperature at which the heater should get disabled. Range: 10 ~ 30, 1 for each step.

If the ambient temperature exceeds the Disable Temperature when the heater is switched on, then the heater must be turned off and the driver must switch to the slow sampling.

Disable temperature, 10 ~ 30, 1 for each step.

Value

20

DurationHeater

This is the amount of time that the heater will stay on once the heater has been enabled.

The heater remains at 100% power unless the user switches it off by tapping on the heater icon or presses the Disable Heater Hotkey or the temperature reading indicates that the device is warm enough.

This setting can be set from 1 to 10 minutes.

Value

5 min

SampleTimes

This is the number of DeltaT temperature samples that are taken to determine if the heater should be activated.

Set the Sample Window. Range: 3 ~ 10, 1 for each step.

Value

10

SlowInterval

The heater driver will monitor the ambient temperature using slow or fast sampling interval or the heater on mode.

The heater must start by using the Slow Sampling Interval. During slow sampling, when the ambient temperature falls below the Enable Temperature, the driver must be switched to the Fast Sampling Interval and start the Chill Time.

Set the slow monitoring interval (minutes). Range: 1 ~ 10, 1 for each step.

Value

3 min

FastInterval

During slow sampling, when the ambient temperature falls below the Enable Temperature, then the driver must switch to the Fast Sampling Interval and start the Chill Time.

During fast sampling, the heater driver must request the device to be in unattended mode instead of suspend. This is because the sample interval may be less than the suspend or resume time. When the device goes to unattended mode, the display must remain off but the sampling will continue.

While in fast sampling after the Chill time expires, if the rise in ambient temperature over an interval exceeds Delta T, the heater must be turned on and the Heater Duration shall be started.

Value

2 sec

ChillTime

This setting is to ensure that the device is really cold enough for the heaters to be turned on.

The Chill Time temperature must remain same or below the Enable Temperature for the heaters to turn on. This is used to save the battery if the user is in the freezer for brief periods of time.

Once the device is in the freezer for the Chill Time (if any), a cold storage icon will appear on the task bar. The icon displayed will be either the snowflake or the heater symbol. One of the icons will be present for remaining time in the freezer.

The snowflake icon indicates that the device is cold enough to need defrosting. The heater icon indicates that the heaters are currently on (regardless of how or when it was turned on).

Chill time (minutes), 1 ~ 60, 1 for each step.

This setting can be set from 0 – 60 minutes.

Value

5 min

DurationLcd(s)

When the heaters are switched on, they alternate between heating the LCD display and heating the Scan Window.

Running both scanner heater element and LCD heater elements simultaneously can put the system at risk of browning out. To prevent this, the driver will alternatively enable the scanner heater element or the LCD heater element.

The scanner heater element and LCD heater element will have different programmable durations.

Duration: LCD heater (seconds), 5 ~ 60, 5 seconds for each step.

Value

10 sec

DurationScan

When the heaters are switched on, they alternate between heating the LCD display and heating the Scan Window.

Running both scanner heater element and LCD heater elements simultaneously can put the system at risk of browning out. To prevent this, the driver will alternatively enable the scanner heater element or the LCD heater element.

The scanner heater element and LCD heater element will have different programmable durations.

Duration: Scanner heater (seconds), 5 ~ 60, 5 seconds for each step.

Value

20 sec

LowBatteryPercent

The low battery threshold will force the heater to be turned off if the battery level drops below the set value in the utility.

Low battery threshold (%), 5 ~ 75, 5 for each step.

Value

25%

PoweronTime

Set Power on time(ms). Range: 0 ~ 50, 10 for each step and 50 ~ 750, 50 for each step.

Value

10 ms

Preemptive

This setting allows the user to enable or disable Preemptive Heating on the device.

This setting has two options:

- **Enable (1)** - Preemptive Delay Timer is used.
- **Disable (0)** - Preemptive Delay Timer is not used and preemptive heating is not automatically started.

It starts when the Chill Time expires (if any). While the Preemptive Delay Timer is running, the snowflake icon is displayed.

When the Preemptive Delay Timer expires, the heaters are turned on at the Preemptive Mode Duty Cycle, and the snowflake icon is replaced by the heater icon.

The device must stay in preemptive mode until a freezer exit is detected. The Duty Cycle allows the user to reduce the battery used while in preemptive mode.

The Preemptive Delay Timer allows the user to save battery during automatic pre-heating. If the user is typically in the freezer for 30 minutes at a time, then the Preemptive Delay Timer must be set to around 25 minutes.

When the heaters are switched on, it alternates between heating the display and heating the scan window.

To detect the freezer exit, it looks for a quick rise in temperature delta over a brief period of time.

This value can be adjusted to make it more or less sensitive.

Value

Disable

PreemptiveDelay

This setting allows the user to enable or disable Preemptive Delay on the device.

This setting has two options:

- **Enable (1)** - Preemptive Delay Timer is used.
- **Disable (0)** - Preemptive Delay Timer is not used and preemptive heating is not automatically started.

It starts when the Chill Time expires (if any). While the Preemptive Delay Timer is running, the snowflake icon is displayed.

When the Preemptive Delay Timer expires, the heaters are turned on at the Preemptive Mode Duty Cycle, and the snowflake icon is replaced by the heater icon.

The device must stay in preemptive mode until a freezer exit is detected. The Duty Cycle allows the user to reduce the battery used while in preemptive mode.

The Preemptive Delay Timer allows the user to save battery while still getting automatic pre-heating. If the user is typically in the freezer for 30 minutes at a time, then the Preemptive Delay Timer must be set to around 25 minutes.

When the heaters are switched on, it alternates between heating the display and heating the scan window.

To detect the freezer exit, it looks for a quick rise in temperature delta over a brief period of time.

This value can be adjusted to make it more or less sensitive.

Preemptive Delay (min), 0 ~ 240, 10 min for each step.

Value

30 min

PreemptiveDuty

The Duty Cycle allows the user to reduce the battery used while in preemptive mode.

This is performed by allowing the heater to reduce the duty time that is turned on.

Set Preemptive Duty_cycle (%). Range: 10 ~ 100, 10 for each step.

Value

50%

DriverMode

This setting is used to set Manual or Automatic mode.

This setting has two options:

- **Manual (1)** - Manual mode requires keys to be mapped to enable and disable the heater via a keypress.
- **Automatic (0)** - Automatic mode will monitor the temperature values to enable and disable the heater automatically.

Automatic mode can be used optionally for Preemptive Mode to pre-heat the LCD and scan window.

Value

Manual

KeyBlanking

This setting allows the user to enable or disable KeyBlanking on the device.

This setting has two options:

- **Enable (1)**
- **Disable (0)**

When a barcode scan is performed, the heater must be “blanked” for the duration of the scan to avoid a possible brown out condition.

The scanner driver must initiate a handshake before it turns on the scan illumination.

The heater driver must acknowledge the handshake and turn off the heater if it is currently on. The heater driver must prevent turning the heater to on until the end of scan handshake is received or one minute elapses.

Value

Enable

Defroster Settings

Enable Defroster

This setting allows the user to enable or disable the Defroster Setting on the device.

Note: Defroster Setting is applicable only for VM1A.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable**
- **Disable**

Value

Enable

Defroster Trip Point

This setting is used to set the Defroster Trip Point value on the device.

The supported values from device config ranges between -10 and 50.

Note: Defroster Trip Point Setting is applicable only for VM1A.

You can type a desired Defroster Trip Point value in the text box provided.

Value

0

Defroster Operation Mode

This setting is used to set Defroster Operation Mode on the device.

Note: Defroster Operation Mode Setting is applicable only for VM1A.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Automatic**
- **Manual**

Value

Manual

Defroster State

This setting is used to set Defroster State on the device.

Note: Defroster State is applicable only for VM1A.

Note: This setting can be applied only when Defroster Mode is in Manual mode; For Automatic mode, the State will be always OFF.

Select the desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **0** = OFF
- **1** = ON

Value

1

Vehicle Dock Settings

VDock Mode

This setting is used to set the VDock Mode on the device.

Select the desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **VDock Mode**
- **Scan Handle Mode**

Value

VDock Mode

Honeywell Launcher Placeholder

HLPH Password

This setting is used to provide password for HLPH Password on the device.
The correct HLPH password grants access to the device following a reboot.
You can type the HLPH password in the text box provided.

Value

SampleHLPH#1

Clear HLPH Password

This setting allows the user to enable or disable Clear HLPH Password option on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Clear HLPH Password on the device.
- **Disable** will deactivate the Clear HLPH Password on the device.

Value

Disable

Auto Install Settings

Auto Install

This setting allows the device to automatically install the applications without user interference.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will allow the Auto Install function on the device.
- **Disable** will disallow the Auto Install function on the device.

Value

Disabled

Auto Install Notification

This setting allows the user to enable or disable Auto Install Notifications on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Auto Install Notifications on the device.
- **Disable** will deactivate the Auto Install Notifications on the device.

Value

Enable

Auto Install Verify Apps

This setting allows the user to enable or disable Auto Install Verify Apps option on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Auto Install Verify Apps on the device.
- **Disable** will deactivate the Auto Install Verify Apps on the device.

Value

Enable

EZConfig Settings

Enable User Password

This setting is used to enable password protection for the EZConfig.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will enable the User Password option for EZConfig.
- **Disable** will disable the User Password option for EZConfig.

Value

Disabled

User Password

This setting is used to provide the password for encrypting the EZConfig Barcode.

Note: The same password must be provided while generating the EZConfig Barcode as well.

You can type a desired user password in the text box provided.

Value

EZconfig#1

Honeywell Provisioning Mode Settings

Provisioning Mode

Provisioning mode is set when provisioning configurations have unrestricted access.

Note: The Provisioning Mode will be 'Off' by default, but it can be turned 'On' manually in the settings.

Select the Provisioning Mode to be configured to the device.

The setting has three options:

- **Auto**
- **Always Enabled**
- **Always Disabled**

Value

Auto

Provisioning Mode Password Settings

By providing the Provisioning Mode Password, the user will be prompted to enable the Provision Mode.

You can type a desired provisioning mode password in the text box provided.

Value

Provisionpassword#1

Provisioning Mode Whitelist Applications

This setting enables the user to add the package names to the provisioning mode white list. The whitelisted packages will have continuous access to Honeywell Provisioning folders.

Use comma (,) to separate multiple entries.

Note: A maximum of three packages can be whitelisted at a time.

Use the text box provided to enter the package names.

Value

org.example.demo

Provisioning Intents Unrestricted

This setting allows the user to enable or disable the Provisioning Intents Unrestricted option on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will enable the Provisioning Intents Unrestricted setting on the device.
- **Disable** will disable the Provisioning Intents Unrestricted setting on the device.

Value

Enable

Honeywell Restriction settings

Restrictions - Emergency Settings

Hide Emergency Button

This setting allows the user to hide or show the Emergency Button on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Yes** will hide the Emergency Button on the device.
- **No** will show the Emergency Button on the device.

Value

Yes

Disable Emergency Alerts

This setting allows the user to enable or disable the Emergency Alerts on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will allow the Emergency Alerts on the device.
- **Disable** will disallow the Emergency Alerts on the device.

Value

Enable

Disable Amber Alerts

This setting allows the user to enable or disable the Amber Alerts on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will allow the Amber Alerts on the device.
- **Disable** will disallow the Amber Alerts on the device.

Value

Enable

Disable Extreme Alerts

This setting allows the user to enable or disable the Extreme Alerts on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will allow the Extreme Alerts on the device.
- **Disable** will disallow the Extreme Alerts on the device.

Value

Enable

Disable Severe Alerts

This setting allows the user to enable or disable the Severe Alerts on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will allow the Severe Alerts on the device.
- **Disable** will disallow the Severe Alerts on the device.

Value

Enable

Restrictions - Network Settings

Restrict Network Location Provider

Network Location Provider allows the user to determine the location of the device by using the mobile connectivity.

This setting provides option to enable or disable the Restrict Network Location Provider setting on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Restrict Network Location Provider setting on the device.
- **Disable** will deactivate the Restrict Network Location Provider setting on the device.

Value

Enable

Selecting Enable will activate the Restrict Network Location Provider setting, i.e., Network Location Provider option will be restricted (inaccessible to user) and Disable will do the opposite.

Restrict Roaming Data

Roaming Data controls the accessibility to data usage on the device outside the registered region.

This setting provides option to enable or disable Restrict Roaming Data setting on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Restrict Roaming Data on the device.
- **Disable** will deactivate the Restrict Notification LED on the device.

Value

Enable

Selecting Enable will activate the Restrict Roaming Data setting, i.e., Roaming Data will be restricted (inaccessible to user) and Disable will do the opposite.

Restrictions - Notification Settings

Restrict Cacert Notification

This setting provides option to enable or disable Restrict Cacert Notification on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Restrict Cacert Notification on the device.
- **Disable** will deactivate the Restrict Cacert Notification on the device.

Value

Enable

Selecting Enable will activate the Restrict Cacert Notification, i.e., Cacert Notification option will be restricted (inaccessible to user) and Disable will do the opposite.

Restrict Notification LED

Notification LED allows or restricts the LED notification pop-up on the device.

This setting provides option to enable or disable Restrict Notification LED on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Restrict Notification LED on the device.
- **Disable** will deactivate the Restrict Notification LED on the device.

Value

Enable

Selecting Enable will activate the Restrict Notification LED, i.e., Notification LED option will be restricted (inaccessible to user) and Disable will do the opposite.

Restrict System Notification

This setting provides option to allow or restrict the System Notifications on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will allow the System Notifications on the device.
- **Disable** will restrict the System Notifications on the device.

Value

Enable

Restrictions - Quick Menu Settings

Hide Wi-Fi

This setting is used to configure the device to allow or restrict the Wi-Fi option in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Hide Wi-Fi option in the Quick Settings menu.
- **Disable** will deactivate the Hide Wi-Fi option in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Hide Wi-Fi, i.e., Wi-Fi will be restricted (inaccessible to user) in the Quick Settings menu and Disable will do the opposite.

Hide Bluetooth

This setting is used to configure the device to allow or restrict the Bluetooth option in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Hide Bluetooth option in the Quick Settings menu.
- **Disable** will deactivate the Hide Bluetooth option in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Hide Bluetooth, i.e., Bluetooth will be restricted in the Quick Settings menu (inaccessible to user) and Disable will do the opposite.

Hide Do Not Disturb

This setting is used to configure the device to allow or restrict the Do Not Disturb option in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Hide Do Not Disturb option in the Quick Settings menu.
- **Disable** will deactivate the Hide Do Not Disturb option in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Hide Do Not Disturb, i.e., Do Not Disturb setting will be restricted in the Quick Settings menu (inaccessible to user) and Disable will do the opposite.

Hide Cellular

This setting is used to configure the device to allow or restrict the Cell Settings in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Hide Cellular option in the Quick Settings menu.
- **Disable** will deactivate the Hide Cellular option in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Hide Cellular, i.e., Cellular setting will be restricted in the Quick Settings menu (inaccessible to user) and Disable will do the opposite.

Hide Airplane Mode

This setting is used to configure the device to allow or restrict the Airplane Mode option in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Hide Airplane Mode in the Quick Settings menu.
- **Disable** will deactivate the Hide Airplane Mode in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Hide Airplane Mode, i.e., Airplane Mode will be restricted in the Quick Settings menu (inaccessible to user) and Disable will do the opposite.

Hide Auto Rotate

This setting is used to configure the device to allow or restrict the Auto Rotate option in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Hide Auto Rotate in the Quick Settings menu.
- **Disable** will deactivate the Hide Auto Rotate in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Hide Auto Rotate, i.e., Auto Rotate will be restricted in the Quick Settings menu (inaccessible to user) and Disable will do the opposite.

Hide Flashlight

This setting is used to configure the device to allow or restrict the Flashlight option in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Hide Flashlight in the Quick Settings menu.
- **Disable** will deactivate the Hide Flashlight in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Hide Flashlight setting, i.e., Flashlight setting will be restricted in the Quick Settings menu (inaccessible to user) and Disable will do the opposite.

Hide Location

This setting is used to configure the device to allow or restrict the Device Location option in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Hide Location in the Quick Settings menu.
- **Disable** will deactivate the Hide Location in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Hide Location setting, i.e., Device Location will be restricted in the Quick Settings menu (inaccessible to user) and Disable will do the opposite.

Hide Cast

This setting is used to configure the device to allow or restrict the Cast Setting in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Hide Cast in the Quick Settings menu.
- **Disable** will deactivate the Hide Cast in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Hide Cast setting, i.e., Cast setting will be restricted in the Quick Settings menu (inaccessible to user) and Disable will do the opposite.

Restrict Settings

This setting is used to configure the device to allow or restrict the Restrict Settings icon in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Restrict Settings in the Quick Settings menu.
- **Disable** will deactivate the Restrict Settings in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Restrict Settings, i.e., Settings option will be restricted in the Quick Settings menu (inaccessible to user) and Disable will do the opposite.

Restrict Battery

This setting is used to configure the device to allow or restrict the Restrict Battery Settings in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Restrict Battery setting in the Quick Settings menu.
- **Disable** will deactivate the Restrict Battery setting in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Restrict Battery setting, i.e., Battery option will be restricted in the Quick Settings menu (inaccessible to user) and Disable will do the opposite.

Restrict Multi-User

This setting is used to configure the device to allow or restrict the Multi-User Settings in the Quick Settings menu.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Restrict Multi-User in the Quick Settings menu.
- **Disable** will deactivate the Restrict Multi-User in the Quick Settings menu.

Value

Enable

Selecting Enable will activate the Restrict Multi-User, i.e., Multi-User option will be restricted in the Quick Settings menu (inaccessible to user) and Disable will do the opposite.

Restrictions - Storage Settings

Restrict SD Card Access

This setting provides option to enable or disable Restrict SD Card Access on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Restrict SD Card Access on the device.
- **Disable** will deactivate the Restrict SD Card Access on the device.

Value

Enable

Selecting Enable will activate the Restrict SD Card Access, i.e., SD Card Access will be restricted (inaccessible to user) and Disable will do the opposite.

Restrictions - MDM Settings

Restrict Factory Reset in Boot Menu

This setting provides option to enable or disable provision of Restrict Factory Reset in boot menu.

Note: Restrict Factory Reset in Boot Menu is supported on Oreo and Pie.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will show the Factory Reset option in boot menu.
- **Disable** will hide the Factory Reset option in boot menu.

Value

Enable

Disable Android Share Option

This setting provides option to allow or disallow Android Share option on the device.

Note: This setting is applicable only for CN80G.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will allow Android Share option on the device.
- **Disable** will disallow Android Share option on the device.

Value

Enable

Restrict Clipboard

This setting allows the user to enable or disable Clipboard on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will allow Clipboard on the device.
- **Disable** will disallow Clipboard on the device.

Value

Enable

Restrict Guest User

This setting allows the user to enable or disable Guest User on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will allow Guest User on the device.
- **Disable** will disallow Guest User on the device.

Value

Enable

Network Settings

DHCP Host Name

DHCP (Dynamic Host Configuration Protocol) is a standardized networking protocol used primarily for assigning dynamic IP addresses.

This optional parameter can be passed to the DHCP server with a DHCP request to provide additional information about the client.

The length of the DHCP host name is restricted to 35 characters and cannot include blank spaces.

Value

00:00:00:a1:2b:cc

Captive Portal HTTPS URL

This setting allows the user to set the Captive Portal Server Address on the device.

You can type a desired value in the text box provided.

Value

None

Background Data Setting

This setting is used to allow or restrict usage of cellular data for applications running in the background.

You can define which application in the background can use cellular data.

Use semicolon (;) to separate multiple values.

The setting has two options:

- 0 = Allow
- 1 = Restrict

Value

For example: `com.android.chrome:1; com.google.android.youtube:0`

In this example, Google Chrome in the background is restricted to use cellular data and YouTube is allowed to use cellular data in background.

Airplane Mode On

Airplane Mode controls the option to cut off all wireless connections to the device.

Use this setting to enable or disable Airplane Mode on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Airplane Mode on the device.
- **Disable** will deactivate the Airplane Mode on the device.

Value

Disable

NFC Settings

Beam Enabled

Android beam is a device-to-device data transfer tool that uses Near-Field Communication (NFC) and Bluetooth to send photos, videos, contact information, links to webpages, navigation directions and more from one device to another just by bumping them together.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Android Beam on the device.
- **Disable** will deactivate the Android Beam on the device.

Value

Disable

NFC Enabled

Near Field Communications (NFC) is a set of standards for portable devices. It allows the devices to establish peer-to-peer radio communications, passing data from one device to another by touching or putting the devices very close together.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Near Field Communication (NFC) on the device.
- **Disable** will deactivate the Near Field Communication (NFC) on the device.

Value

Disable

Mobile Data Enable

Enable/Disable Mobile Data.

This has two options:

- **Enable** – Enables the Mobile Data.
- **Disable** – Disables the Mobile Data.

Ethernet Settings

Ethernet Enable

This setting allows the user to configure the Ethernet settings on the device.

To enable or disable the operation of the Ethernet Adapter on the device, select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Ethernet settings on the device.
- **Disable** will deactivate the Ethernet settings on the device.

Value

Enable

Static or DHCP Selection

This setting is used to enable or disable the Ethernet Static/DHCP on the device.

If Dynamic (DHCP) is selected, an IP Address for the Ethernet adapter will be automatically fetched from the DHCP Server.

If Static is selected, an IP Address for the Ethernet adapter will be assigned based on the values selected for IP Address, Gateway Address, Network Mask, Primary DNS and Secondary DNS.

To enable or disable the Ethernet Static/DHCP, select a desired option from the drop-down list box provided.

This setting has two options:

- **Enable** will activate the Ethernet static on the device.
- **Disable** will activate the DHCP on the device.

Value

Enable

Static IP Value

This setting allows the user to set the Static IP value on the device.

Type the Static IP in the format xxx.xxx.xxx.xxx in the text box provided.

Value

192.168.12.34

Network Prefix Length

Network Prefix Length is the leftmost contiguous bits of an address which identifies the network portion of the address.

It is also used with uni-cast addresses to separate the prefix portion of the address from the Interface ID.

Value

In the Address: 2001:0db8:0000:0000:0000:0000:0001, 2001:0db8 is the prefix.

Gateway

This setting allows the user to set the Static Gateway on the device.

Type the Static Gateway in the format xxx.xxx.xxx.xxx in the text box provided.

Value

192.168.1.1

DNS 1

This setting allows the user to set the primary DNS server address to be assigned on the device.

Type the Static DNS 1 in the format xxx.xxx.xxx.xxx in the text box provided.

Value

192.168.12.31

DNS 2

This setting allows the user to set the secondary DNS server address to be assigned on the device.

Type the Static DNS 2 in the format xxx.xxx.xxx.xxx in the text box provided.

Value

192.168.12.212

Proxy Name

This setting allows the user to manually enter the proxy server's details to gain the internet access via the Ethernet.

You can enter the address of the proxy in the text box provided.

Value

proxy.example.com

192.168.1.100

Proxy Port

This setting allows the user to manually enter the proxy server's details to gain the internet access via The Ethernet.

You should specify Port, Proxy Server and Bypass List whenever Ethernet Proxy Server configuration is performed to help ensure that all three values are synchronized.

Complete IP address will be the combination of Proxy hostname and Proxy port details.

Value

6060

Bypass Proxy

The setting is used to provide access to any addresses that should bypass the Proxy Server to gain internet access on the device via the Ethernet.

Enter the Bypass Proxy address in the text box separated by commas.

Proxy URL: Set URL for proxy auto-config.

Proxy Type: Select proxy type.

This settings has 3 options.

- None
- Manual
- Proxy_auto config.

Value

localhost, 127.0.0.1, bescom-mo.gov

Wi-Fi Settings

Wi-Fi Frequency Band

Wi-Fi Frequency Band is a range of frequency values the device can connect to.

Select the Wi-Fi frequency band to be configured to the device.

The setting has three options:

- **0 = Auto** will automatically connect the device to the valid frequency band.
- **1 = 5 GHz** will only connect the device to 5GHz frequency band.
- **2 = 2.4GHz** will only connect the device to 2.4GHz frequency band.

Value

1

Wi-Fi ESE Enable

The ESE (Embedded Secure Element) is a tamper-proof chip embedded in the device. It ensures the data is stored in a safe place and authorization is maintained to fetch the information.

To enable or disable the Wi-Fi ESE, select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Wi-Fi ESE on the device.
- **Disable** will deactivate the Wi-Fi ESE on the device.

Note: Wi-Fi will be automatically disabled during the setting change and then restored back.

Value

Enable

Wi-Fi FT Enable

Wi-Fi FT (Fast Transition) allows the device to roam quickly in environments implementing WPA2 Enterprise security, by ensuring that the device does not need to re-authenticate to the server every time it roams from one access point to another.

To enable or disable the Wi-Fi FT, select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Wi-Fi Fast Transition on the device.
- **Disable** will deactivate the Wi-Fi Fast Transition on the device.

Note: Wi-Fi will be automatically disabled during the setting change and then restored back.

Value

Enable

Data Stall Recovery

Select Enable/Disable for Data Stall Recovery. To apply this setting, Wi-Fi will be disabled and restored back.

This has two options:

- **Enable** – Enables the Data Stall Recovery.
- **Disable** – Disables the Data Stall Recovery.

Wi-Fi gDot11 Mode

Dot 11 is a fast, secure, and reliable Wi-Fi service which delivers seamless network connectivity.

Select the desired option to be configured to the device. The valid value ranges from 0-9.

- **0 = auto**
- **1 = abg**
- **2 = 11b**
- **3 = 11g**
- **4 = 11n**
- **5 = 11g only**
- **6 = 11n only**
- **7 = 11b only**
- **8 = 11ac only**
- **9 = 11ac**

Value

7

Wi-Fi Power Save

Wi-Fi Power Save will analyse patterns in Wi-Fi traffic and adjusts the wireless connection accordingly thereby reducing battery usage.

To enable or disable Wi-Fi Power Save, select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Wi-Fi Power Save on the device.
- **Disable** will deactivate the Wi-Fi Power Save on the device.

Note: Wi-Fi will be automatically disabled during the setting change and then restored back.

Value

Enable

Wi-Fi gP2P Enabled

Peer-to-peer (P2P) computing or networking is a distributed application architecture that partitions tasks or workloads between peers.

To enable or disable Wi-Fi gP2P feature on the device, select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the P2P feature on the device.
- **Disable** will deactivate the P2P feature on the device.

Value

Enable

Wi-Fi WMM Configuration

Wi-Fi Multimedia is a specification that enhances Quality Of Service (Qos) on a network by prioritizing data packets according to the categories: Voice, Video, Best effort and Background.

Select the WMM configuration to be applied to the device.

The setting has three options:

- 0 = Auto join any AP
- 1 = Enable Qos only
- 2 = Enable but Qos

Value

1

Wi-Fi Beacon Loss

Set the Beacon loss of the device to a desired level. The valid value ranges from 10 to 200.

To adjust the Beacon loss of the device, you can type a value in the text box provided.

Value

63

Force Wi-Fi Priority

The Force Wi-Fi Priority lets you set Wi-Fi connection priority on the device. It periodically monitors for signal strength and switches between Wi-Fi networks accordingly.

To enable or disable Force Wi-Fi Priority on the device, select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Force Wi-Fi Priority on the device.
- **Disable** will deactivate the Force Wi-Fi Priority on the device.

Note: Wi-Fi will be automatically disabled during the setting change and then restored back.

Value

Enable

Wi-Fi Operating Channel Enable

This setting enables WLAN subsystem to operate on the selected channels.

To enable or disable this setting on the device, select a desired option from the dropdown list box provided.

The setting has two options:

- 0 = Disable
- 1 = Enable

Note: Wi-Fi will be automatically disabled during the setting change and then restored back.

Value

1

Select the channels

This setting allows the user to enter the channels over which the WLAN will operate on the device.

The setting "Wi-Fi Operating Channel Enable" needs to be enabled prior to selection of channels here.

This function allows the user to select the desired channel for the Wi-Fi.

Note: Wi-Fi will be automatically disabled during the setting change and then restored back.

Value

1-14, 36, 40, 44, 48, 52, 56, 60, 64, 100, 104, 108, 112, 116, 120, 124, 128, 132, 136, 140, 149, 153, 157, 161, 165.

RSSI Threshold

RSSI (Received Signal Strength Indicator) Threshold is a measure of maximum power level that a RF client device can receive from an access point or router.

Set the Roaming RSSI threshold to a desired level. The valid value ranges from -90 to -40.

To adjust the Roaming RSSI threshold on the device, you can type a value in the text box provided.

Value

-72

RSSI Difference

Set the Roam RSSI (Received Signal Strength Indicator) difference to a desired level. The valid value ranges from 5 to 50.

Note: Wi-Fi will be automatically disabled during the setting change and then restored back.

To adjust the Roam RSSI difference on the device, you can type a value in the text box provided.

Value

24

Roaming Band

Wi-Fi Roaming is the process of a client moving an established Wi-Fi network association from one access point to another access point within the same Extended Service Set (ESS) without losing connection.

Roaming Band defines the range of the network upto which the device can connect.

To enable or disable the Roaming band setting on the device, select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Roaming Band setting on the device.
- **Disable** will deactivate the Roaming Band setting on the device.

Note: Wi-Fi will be automatically disabled during the setting change and then restored back.

Value

Disable

Reset Roaming Parameters

This setting allows the user to reset the existing roaming parameters on the device.

To enable or disable Reset Roaming Parameters on the device, select a desired option from the drop-down list box provided.

Note: Wi-Fi will be automatically disabled during the setting change and then restored back.

Value

Enable

WLAN Country Code

This setting is used to set WLAN Country Code on the device.

You can type a desired value in the text box provided.

Value

BE/ Belgium

Clear WLAN Country Code

This setting allows to clear WLAN Country Code on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Clear WLAN Country Code on the device.
- **Disable** will deactivate the Clear WLAN Country Code on the device.

Value

Enable

Wi-Fi Available Notification Enabled

This option controls the notification of open Wi-Fi networks on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the notification of open Wi-Fi networks.
- **Disable** will deactivate the notification of open Wi-Fi networks.

Value

Disable

Wi-Fi Enabled

This setting provides options to configure the Wi-Fi function on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Wi-Fi function on the device.
- **Disable** will deactivate the Wi-Fi function on the device.

Value

Disable

WWAN Settings

Cellular Data Enabled

This setting allows the user to enable or disable Cellular Data on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Cellular Data on the device.
- **Disable** will deactivate the Cellular Data on the device.

Value

Disable

Roaming Data Enabled

Roaming Data controls the accessibility to data usage on the device outside the registered region.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Roaming Data on the device.
- **Disable** will deactivate the Roaming Data on the device.

Value

Disable

WWAN APN Profile

Name

This setting provides option to enter the APN (Access Point Name) name to be used on the device.

Type the required APN in the text box provided.

Value

Smart Internet

APN

An APN (Access Point Name) is the name of a gateway between a GSM, GPRS, 3G or 4G mobile network and another computer network, frequently the public Internet.

This setting specifies the web address of the service provider.

Value

vodafone-service-provider

APN Proxy

This setting specifies the address of the proxy server. This may be given as an IP address (for example, numbers connected with dots or colons such as 10.0.0.1) or as a hostname.

You can type the desired APN Proxy in the text box provided.

Many carriers do not require a proxy.

Value

192.168.12.101

Port

This field relates to the Proxy field, and if a proxy is being used, both must be set. There is no default value for this field and leaving it blank will disable use of the proxy.

Consult your carrier's recommended APN settings to see what port number you need to use if you are using an HTTP proxy. If you do not need to use an HTTP proxy this should remain empty.

Value

7070

Username

This setting allows the user to enter a user name that can be used to authenticate to an APN.

A network accessed via an APN may or may not require authentication (Authentication is done using an username and a password).

Value

beeline.username

APN Password

This setting allows the user to authenticate to an APN using a password in order to access a network.

A network accessed via an APN may or may not require authentication (Authentication is done using an username and a password).

Value

beeline-password-beeline

Server

This setting allows the user to enter a WAP Gateway Server address to be used for an APN.

This field is usually left blank.

Value

192.168.12.1

MMSC

This setting allows the user to enter the Multimedia Messaging Service Center (MMSC) address required to send and receive MMS messages over the network accessed via an APN.

Value

http://mmsc.proxy.com

MMS Proxy

This setting refers to the address or name of an HTTP proxy to be used only for communicating with the MMSC (Multimedia Messaging Service Center) to send and receive MMS messages over the network accessed via an APN.

If an MMS Proxy is required, an MMS Port is also generally required.

Value

Testproxy name

MMS Port

This setting refers to the port number of an HTTP proxy to be used only for communicating with the MMSC (Multimedia Messaging Service Center) to send and receive MMS messages over the network accessed via an APN.

If an MMS Proxy is required, an MMS Port is also generally required.

Value

8080

MCC

MCC stands for Mobile Country Code. This option specifies the carrier network that the APN configuration should be used for.

The MCC generally match the SIM Card being used or the APN will not be usable.

Value

404

MNC

MNC Stands for Mobile Network Code. This option specifies the carrier network that the APN configuration should be used for.

The MNC generally match the SIM Card being used or the APN will not be usable.

Value

49

Authentication Type

Authentication Type is a method used to establish a data connection on the device.

Select authentication type to be configured to the device.

The setting has four options:

- 0 = None
- 1 = PAP
- 2 = CHAP
- 3 = PAP / CHAP

Value

3

Type

This feature specifies which types of data communication should use this APN configuration. Different types of communication may use different configurations.

Value

MMS

Protocol

This setting specifies whether to enable IPv4, IPv6 or both.

This can be set independently for home and roaming networks.

Select the option to be configured to the device.

The setting has three options:

- 0 = IPV4
- 1 = IPV6
- 2 = IPV4 / IPV6

Value

2

Roaming Protocol

This setting specifies whether to enable IPv4, IPv6 or both on the device.

This can be set independently for home and roaming networks.

Select the option to be configured to the device.

The setting has three options:

- **0** = IPV4
- **1** = IPV6
- **2** = IPV4 / IPV6

Value

1

Bearer

This is an optional field allowing you to exclude this APN configuration based on the communication technology.

Select the option to be configured to the device.

The setting has three options:

- **0** = LTE
- **1** = eHRPD
- **2** = Unspecified (default)

Value

2

MVNO Type

This setting allows the user to select a desired MVNO (Mobile Virtual Network Operator) Type on the device. It also restricts use of the APN to certain MVNOs or subscriber accounts.

Select the MVNO Type to be configured to the device.

The setting has four options:

- **0** = None, No MVNO will be used to configure for the APN.
- **1** = SPN, the MVNO will be specified via an SPN (Service Provider Name) value for the APN.
- **2** = IMSI, the MVNO will be specified via an IMSI (International Mobile Subscriber Identity) value for the APN.
- **3** = GID, the MVNO will be specified via an GID (Group Identifier) value for the APN.

Value

3

MVNO Match Data

This setting allows the device to match the APN (Access Point Name) on the MVNO (Mobile Virtual Network Operator) and the carrier to allow data transmission through the connected channel.

The exact value to be specified depends on the MVNO Type specified. Consult your MVNO carrier for information on the MVNO Type and MVNO Match Data value to be used.

If no APN is provided in the MVNO match data, device will automatically fetch the default APN on the device.

Value

4E, 302720x94, BEN NL

Bluetooth Settings

Bluetooth Whitelist Enabled

This setting allows the user to enable or disable the Bluetooth Whitelist functionality on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Bluetooth Whitelist functionality on the device.
- **Disable** will deactivate Bluetooth Whitelist functionality on the device.

Value

Enable

Add Bluetooth Whitelist

This setting is used to provide the OUI (Organizationally Unique Identifier) information to Bluetooth Whitelist.

You can type a desired value in the text box provided.

Use semicolon (;) to separate the OUIs.

Value

00:11:22;11:22:33

Clear Bluetooth Whitelist

This setting allows the user to clear the Bluetooth Whitelist values on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Clear Bluetooth Whitelist functionality on the device.
- **Disable** will deactivate Clear Bluetooth Whitelist functionality on the device.

Value

Enable

Bluetooth Device Name

This setting allows the user to provide a name for the device's Bluetooth network.

You can type a desired value in the text box provided.

Value

CT60

Enable Bluetooth Silent Pairing

This setting controls whether the device will be permitted to pair with remote Bluetooth devices without requiring user confirmation.

Note: This feature is different from auto-pairing; it skips the confirmation step after device pairing has been initiated by the user.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Bluetooth Silent Pairing functionality on the device.
- **Disable** will deactivate the Bluetooth Silent Pairing functionality on the device.

Value

Enable

Bluetooth Enable

This setting allows the user to enable or disable Bluetooth function on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Bluetooth function on the device.
- **Disable** will deactivate Bluetooth function on the device.

Value

Enable

Bluetooth FTP Profile

The Bluetooth FTP profiles provide standards which allow devices to use Bluetooth in the intended manner.

This setting allows the user to enable or disable Bluetooth FTP Profile on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Bluetooth FTP Profile on the device.
- **Disable** will deactivate Bluetooth FTP Profile on the device.

Value

Enable

Suppress Prompt for ScanHandle

This setting is used to suppress the prompt whether scan handle is attached or not. Select the option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Yes** = Hide
- **No** = Display Value Hide

Value

Hide

Key Repeat Disable

This setting is used to enable or disable Key Repeat on long press (supported on Oreo and Pie).

This has two options:

- **Enable** – Enable Key Repeat on long press.
- **Disable** – Disable Key Repeat on long press.

OS SDK Setting

OS SDK Setting will whitelist the application packages allowed to perform sensitive operations provided by the Honeywell SDK..

Use comma (,) as separator in between Package names.

Set to 0 to clear whitelist [Requires FW: 86.xx.06+].

Value

com.package.name1,com.package.name2

Date and Time

Auto Time

This setting provides option to fetch the date, time, and time zone automatically from the network.

To enable or disable the Auto Time option, select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Auto Time setting on the device.
- **Disable** will deactivate the Auto Time setting on the device.

Value

Enable

Time Format

This setting controls the Time Format in which time will be displayed on the device.

The setting has two options:

- **12** hour clock runs from 1 am to 12 noon and then from 1 pm to 12 midnight.
- **24** hour clock uses the numbers 00:00 to 23:59 (midnight is 00:00).

Value

12

Date and Time

This setting enables the user to set the appropriate date and time on the device and to set the display style of Date and Time on the device.

Set date and time in the format yyyy-mm-dd, hh:mm.

Value

2019-09-12, 10:52

Select Time Zone

This setting allows the user to select whether time zone configuration will be performed manually or automatically by connecting to a NITZ (Network Identity and Time Zone) source.

Select the desired time zone from the drop-down list box.

Value

America/Los_Angeles

Sets the Time from NTP

This setting allows the user to enter the address of the Network Time Protocol (NTP) Server to be used to perform automatic date and time configuration on a device when the Auto Time mode is configured on the device.

Value

us.pool.ntp.org

Show NTP Server Option

This setting controls whether to show or hide the NTP Server option in the device UI in settings.

The setting has two options:

- **On** = Show
- **Off** = Hide

Value

Off

Doze Mode

Doze Mode Settings

Doze Mode prevents certain tasks from running when the device is in idle state to reduce power consumption.

To enable or disable the Doze Mode Settings, select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Doze Mode Settings on the device.
- **Disable** will deactivate the Doze Mode Settings on the device.

Value

Enable

Logger Settings

HXLogger Settings

HXLogger enables the logging option on the device. The logs will be placed in a folder structure in the internal storage of the device and the reports related to applications or errors or other information will be logged here.

This setting allows the user to enable or disable the HX Logger setting on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the HXLogger Settings on the device.
- **Disable** will deactivate the HXLogger Settings on the device.

Value

Enable

HXLogger Settings

Logger Path

This setting is used to set the path of the logger folder on the device.

You can type a desired value in the text box provided.

Value

Default path = /storage/IPSM/logger

ANR Plugin

This setting allows the user to enable or disable ANR Plugin on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the ANR Plugin on the device.
- **Disable** will deactivate the ANR Plugin on the device.

Value

Enable

Tombstone Plugin

This setting allows the user to enable or disable Tombstone Plugin on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Tombstone Plugin on the device.
- **Disable** will deactivate the Tombstone Plugin on the device.

Value

Enable

TCPDump Plugin

This setting allows the user to enable or disable TCPDump Plugin on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the TCPDump Plugin on the device.
- **Disable** will deactivate the TCPDump Plugin on the device.

Value

Enable

TCPDump Interface Value

This setting is used to set TCPDump Interface Value on the device.

You can type a desired value in the text box provided.

Value

12

Enable Snapshot Plugin

This setting is used to set whether to enable Snapshot Plugin or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Snapshot Plugin on the device.
- **Disable** will deactivate the Snapshot Plugin on the device.

Value

Enable

Snapshot Log Interval

This setting is used to set log interval in seconds on the device.

You can type a desired value in the text box provided.

Value

10

Snapshot Log Keep Time

This setting is used to set log keep time in seconds on the device.

You can type a desired value in the text box provided.

Value

50

Enable SnapShot topcmd

This setting is used to set whether to enable Top Command or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Top Command on the device.
- **Disable** will deactivate the Top Command on the device.

Value

Enable

Enable SnapShot CPUInfo

This setting is used to set whether to enable SnapShot CPUInfo or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the SnapShot CPUInfo on the device.
- **Disable** will deactivate the SnapShot CPUInfo on the device.

Value

Enable

Enable SnapShot MemInfo

This setting is used to set whether to enable SnapShot MemInfo or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the SnapShot MemInfo on the device.
- **Disable** will deactivate the SnapShot MemInfo on the device.

Value

Enable

Enable SnapShot DiskInfo

This setting is used to set whether to enable SnapShot DiskInfo or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the SnapShot DiskInfo on the device.
- **Disable** will deactivate the SnapShot DiskInfo on the device.

Value

Enable

Enable SnapShot ProcessInfo

This setting is used to set whether to enable SnapShot ProcessInfo or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the SnapShot ProcessInfo on the device.
- **Disable** will deactivate the SnapShot ProcessInfo on the device.

Value

Enable

Enable Dumpsys Plugin

This setting is used to set whether to enable Dumpsys Plugin or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Dumpsys Plugin on the device.
- **Disable** will deactivate the Dumpsys Plugin on the device.

Value

Enable

Dumpsys Log Interval

This setting is used to set Dumpsys Log Interval in seconds on the device.

You can type a desired value in the text box provided.

Value

50

Dumpsys Log KeepTime

This setting is used to set Dumpsys Log KeepTime in seconds on the device.

You can type a desired value in the text box provided.

Value

50

Enable Dumpsys AudioInfo

This setting is used to set whether to enable Dumpsys AudioInfo or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Dumpsys AudioInfo on the device.
- **Disable** will deactivate the Dumpsys AudioInfo on the device.

Value

Enable

Enable Dumpsys Battery Info

This setting is used to set whether to enable Dumpsys Battery Info or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Dumpsys Battery Info on the device.
- **Disable** will deactivate the Dumpsys Battery Info on the device.

Value

Enable

Enable Dumpsys Mem Info

This setting is used to set whether to enable Dumpsys Mem Info or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Dumpsys Mem Info on the device.
- **Disable** will deactivate the Dumpsys Mem Info on the device.

Value

Enable

Enable Dumpsys Location Info

This setting is used to set whether to enable Dumpsys Location Info or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Dumpsys Location Info on the device.
- **Disable** will deactivate the Dumpsys Location Info on the device.

Value

Enable

Enable Dumpsys Wi-Fi Info

This setting is used to set whether to enable Dumpsys Wi-Fi Info or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Dumpsys Wi-Fi Info on the device.
- **Disable** will deactivate the Dumpsys Wi-Fi Info on the device.

Value

Enable

Enable Dumpsys Wi-Fi Scanner Info

This setting is used to set whether to enable Dumpsys Wi-Fi Scanner Info or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Dumpsys Wi-Fi Scanner Info on the device.
- **Disable** will deactivate the Dumpsys Wi-Fi Scanner Info on the device.

Value

Enable

Enable Dumpsys Power Info

This setting is used to set whether to enable Dumpsys Power Info or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Dumpsys Power Info on the device.
- **Disable** will deactivate the Dumpsys Power Info on the device.

Value

Enable

Enable DiagMdLog Plugin

This setting is used to set whether to enable DiagMdLog Plugin or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the DiagMdLog Plugin on the device.
- **Disable** will deactivate the DiagMdLog Plugin on the device.

Value

Enable

Enable Camera Plugin

This setting is used to set whether to enable Camera Plugin or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Camera Plugin on the device.
- **Disable** will deactivate the Camera Plugin on the device.

Value

Enable

Language and Input Settings

Locale Country

This setting allows the user to set the country code on the device, like 'US'.

You can select the appropriate country code from the drop-down list provided.

Value

US

Locale Language

This setting allows the user to select the language of preference for navigation on the device.

You can select a desired language from the drop-down list provided.

Value

English

Default Input Method

This setting enables the user to set the Default Input Method on the device.

You can type a desired default input method in the text box provided.

Value

com.android.hsm.sip/.SIPSoftKeyboard

Show Hardware Input Method

This setting is used to configure the device whether to show or hide the virtual keyboard when physical keyboard is active.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will show the Hardware Input Method on the device.
- **Disable** will hide the Hardware Input Method on the device.

Value

Enable

Enable Keyboard Suggestion

This setting is used to set whether to enable Keyboard Suggestion or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Keyboard Suggestion on the device.
- **Disable** will deactivate the Keyboard Suggestion on the device.

Value

Enable

EnablePublixSetting HonKeyboard

This setting is used to set whether to enable Publix setting in Honeywell Keyboard or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Publix setting in Honeywell Keyboard.
- **Disable** will deactivate the Publix setting in Honeywell Keyboard.

Value

Enable

Autofill Service

This setting is used to set whether to enable Autofill Service or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Google Autofill Service**
- **None**

Value

None

Enable Google Keyboard Emoji

This setting is used to enable or disable Google keyboard emoji.

- **0 = Disable**
- **1 = Enable**

Enable Keypress Sound for Physical Keyboard

This setting is used to set whether to enable Keypress Sound for physical keyboard or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Keypress Sound for physical keyboard on the device.
- **Disable** will deactivate the Keypress Sound for physical keyboard on the device.

Value

Enable

Vibrate on Key Press

This setting is used to set whether to keep vibration enabled on keypress on the device or not.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate vibration on keypress on the device.
- **Disable** will deactivate vibration on keypress on the device.

Value

Enable

Pointer Speed

This setting allows the user to change the speed at which mouse pointer moves.

Valid value ranges between -7 and +7.

You can type a desired value in the text box provided.

Value

0

Spell Checker Enabled

This setting allows the user to know when words are misspelled and corrects misspelled words as you type.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Spell Checker on the device.
- **Disable** will deactivate the Spell Checker on the device.

Value

Enable

Selected Spell Checker

Selected Spell Checker service is one of the services managed by the text service manager and helps to check the spelling for a selected text.

You can type the package name of the spell checker service that you want to enable for spell checking.

Value

Sample Package

Enabled Input Methods

This setting enables the user to set input method list.

Use colon as a separator for multiple entries.

For example:

`com.android.hsm.sip/.SIPSoftKeyboard:com.android.inputmethod.pinyin/.PinyinIME.`

Value

`com.android.hsm.sip/.SIPSoftKeyboard:com.android.inputmethod.pinyin/.PinyinIME.`

Text to Speech

TTS Default Rate

Set the Text to Speech (TTS) default rate of the device to a desired level.

The text to speech default rate ranges from 0 to 8.

Select a desired value from the drop-down list box provided.

- 0 - Very slow
- 1 - Slow
- 2 - Normal
- 3 - Fast
- 4 - Faster
- 5 - Very Fast
- 6 - Rapid
- 7 - Very Rapid
- 8 - Fastest

Value

2

Location

Wi-Fi Scan Always Enabled

This setting controls the device to always keep scanning for available Wi-Fi networks.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Wi-Fi Scan Always Enabled on the device.
- **Disable** will deactivate the Wi-Fi Scan Always Enabled on the device.

Value

Enable

Bluetooth Low Energy Scan Always Enabled

This setting allows the user to set whether to keep Bluetooth Low Energy Scan always enabled or not.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Bluetooth Low Energy Scan Always Enabled on the device.
- **Disable** will deactivate the Bluetooth Low Energy Scan Always Enabled on the device.

Value

Enable

Location Settings

Select the Location Mode. These options are available in Android N and O. The three options other than "off" will make the Location Mode on in Android Pie.

There are 4 options available for this setting.

- Off
- Sensors only
- Location providers allowed
- High accuracy

Printing Configuration

Enable Cloud Print Service

This setting is used to set whether to enable cloud print service or not.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Enable Cloud Print Service on the device.
- **Disable** will deactivate the Enable Cloud Print Service on the device.

Value

Enable

Screen Lock Settings

Use these options to set Screen Lock related settings.

None

Enter 1 to set screen lock to None.

Note: For Pie and above Android versions, enter 'Saved Screen Lock Password' to make this setting take effect.

Saved Screen Lock Password

Set current saved password, default is 0000. (Supported on Pie and above Android versions).

Secure Start-Up Enabled

Set whether to enable Secure start-up or not. If enabled, screen lock PIN is required to start your device. (Supported on Oreo and above Android versions).

Password Quality

Set password quality.

Screen Lock Password

Set screen lock pin, at least 4 numbers.

Note: For Pie and above Android versions, enter 'Saved Screen Lock Password' to set new PIN.

Clear Screen Lock Password

Enter 1 to clear the Screen Lock.

Note: For Pie and above Android versions, enter 'Saved Screen Lock Password' to make this setting take effect.

Security

Lock on Power Key Press Always Enabled

This setting enables the device to lock on pressing power key on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Lock on Power Key Press Always Enabled on the device.
- **Disable** will deactivate Lock on Power Key Press Always Enabled on the device.

Value

Enable

Silently Activate Device Admin Applications

Set the application package names where the packages can be enabled as device admin without user intervention. Packages are separated by a colon (:), for example, <com.application1:com.application2>.

Show Password Enabled

This setting is used to enable or disable to show password characters in text editors or not.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Show Password Enabled on the device.
- **Disable** will deactivate Show Password Enabled on the device.

Value

Enable

Users

Add Users From Locked Screen Enabled

This setting is used to determine whether users are allowed to add more users or guest from lockscreen or not.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Add Users From Lock Screen Enabled on the device.
- **Disable** will deactivate the Add Users From Lock Screen Enabled on the device.

Value

Enable

Sound and Notification Settings

Haptic Feedback Enabled

This setting is used to enable vibration on the device when soft keys are pressed and on certain UI (User Interface) interactions.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Haptic Feedback on the device.
- **Disable** will deactivate the Haptic Feedback on the device.

Value

Enable

Alarm Volume

This setting enables the user to set the Alarm Volume on the device to a desired level.

You can type a desired value in the text box provided. The valid alarm volume ranges from 0 to 7.

Value

5

Music Volume

This setting enables the user to set the Music Playback Volume on the device to a desired level. The valid alarm volume ranges from 0 to 7.

You can type a desired value in the text box provided.

Value

5

Ring Volume

This setting enables the user to set the Ringing Volume on the device to a desired level. The valid alarm volume ranges from 0 to 7.

You can type a desired value in the text box provided.

Value

5

Vibrate When Ringing

This setting controls the vibration option on the device during an incoming call.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Vibrate When Ringing option on the device.
- **Disable** will deactivate the Vibrate When Ringing option on the device.

Value

Enable

Notification Sound

This setting is used to set the Notification Sound on the device.

The system supports the Notification sound in two formats:

- Format 1 starts with "**content://**" which indicates system-wide default sound.
- Format 2 starts with "**file://**" which indicates that audio file from storage area.

Value

For example:

1. content://media/internal/audio/media/96
2. file://volume/audio/1.mp3

Ringtone Sound

This setting is used to set the Ringing Tone on the device.

The system supports the Ringing tone in two formats:

- Format 1 starts with "**content://**" which indicates system-wide default sound.
- Format 2 starts with "**file://**" which indicates that audio file from storage area.

Value

For example:

1. content://media/internal/audio/media/174
2. file://volume/audio/12.mp3

DTMF Tone Enabled

This setting is used to turn on the sounds for dial pad on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the DTMF Tone on the device.
- **Disable** will deactivate the DTMF Tone on the device.

Value

Enable

Sound Effects Enabled

This setting is used to turn on the sounds for screen selections on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Sound Effects on the device.
- **Disable** will deactivate the Sound Effects on the device.

Value

Enable

Lockscreen Sounds Enabled

This setting is used to turn on the sound for screen lock on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Lockscreen Sounds on the device.
- **Disable** will deactivate the Lockscreen Sounds on the device.

Value

Enable

Charging Sounds Enabled

This setting enables the sound notification when the device is plugged for charging.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Charging Sounds on the device.
- **Disable** will deactivate the Charging Sounds on the device.

Value

Enable

Show Notifications On Locked Screen Enabled

This setting allows the user to enable or disable the display of notifications on the screen when the device screen is locked.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Show Notifications on Locked Screen option on the device.
- **Disable** will deactivate the Show Notifications on Locked Screen option on the device.

Value

Enable

Power Mode Settings

Power Mode

Select a desired power mode to be configured to the device from the drop-down list box provided.

Note: Power Mode Settings is applicable only for VM1A.

The setting has five options:

- **Auto**
- **AC or DC Mode**
- **Ignition Control Mode**
- **UPS Mode**
- **Ignition Control Losing Mode**

Value

Auto

Switch State to Sleep

This setting is used to set the inactivity timeout after which device will go into sleep mode.

Note: Power Mode Settings is applicable only for VM1A.

Select a desired Timeout Value to be configured to the device from the drop-down list box provided.

The setting has ten options:

- Never
- 5 seconds
- 15 seconds
- 30 seconds
- 1 minute
- 2 minutes
- 5 minutes
- 10 minutes
- 30 minutes
- 1 hour

Value

15 seconds

Switch State to Shutdown

This setting is used to set the inactivity timeout after which device will shutdown.

Note: Power Mode Settings is applicable only for VM1A.

Select a desired Timeout Value to be configured to the device from the drop-down list box provided.

The setting has sixteen options.

- Never
- 1 minute
- 2 minutes
- 3 minutes
- 5 minutes
- 10 minutes
- 15 minutes
- 20 minutes
- 25 minutes
- 30 minutes
- 45 minutes
- 1 hour
- 2 hours
- 3 hours
- 4 hours
- 5 hours

Value

Never

Unattended Mode

This setting is used to set whether to enable or disable unattended mode on the device.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Unattended Mode on the device.
- **Disable** will deactivate the Unattended Mode on the device.

Value

Enable

Web Applications SDK

Port

This setting is used to provide the Port Number on the device.

You can type a desired value in the text box provided.

Value

6060

Enabled

This setting is used to enable or disable the Web Interface Settings.

Select a desired option to be configured to the device from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Web Interface Settings on the device.
- **Disable** will deactivate the Web Interface Settings on the device.

Value

Enable

Accessibility

Accessibility Display Magnification Enabled

This setting is used to enable or disable Accessibility Display Magnification on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Accessibility Display Magnification on the device.
- **Disable** will deactivate the Accessibility Display Magnification on the device.

Value

Enable

High Text Contrast Enabled

This setting enables or disables whether to draw text with high contrast while in accessibility mode.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the High Text Contrast on the device.
- **Disable** will deactivate the High Text Contrast on the device.

Value

Enable

In-Call Power Button Behavior

This setting controls the behavior of the power button while on call and the screen is on. Pressing the power button while on call will end the call.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the In-Call Power Button Behavior on the device.
- **Disable** will deactivate the In-Call Power Button Behavior on the device.

Value

Enable

Long Press Timeout

This setting provides options to increase or decrease the time duration for a touch on the screen to register as a touch and hold action.

Select a desired option from the drop-down list box provided.

The setting has two options:

- Short
- Medium
- Long

Value

Short

Accessibility Display Inversion Enabled

This setting is used to enable or disable Accessibility Display Inversion on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Accessibility Display Inversion on the device.
- **Disable** will deactivate the Accessibility Display Inversion on the device.

Value

Enable

Accessibililty Captioning

This feature provides option whether to enable Caption (Timed text) on video content or not.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Accessibility Captioning on the device.
- **Disable** will deactivate the Accessibility Captioning on the device.

Value

Enable

Accessibility Captioning Locale

This setting is used to select a valid input for Caption Locale on the device.

Select a desired option from the drop-down list box provided.

Value

Bodo (India)

Accessibility Captioning Font Scale

This setting is used to select valid input for Accessibility Captioning Font Scale on the device.

Select a desired option from the drop-down list box provided.

The setting has five options:

- **0.25**
- **0.5**
- **1**
- **1.5**
- **2**

Value

0.25

Accessibility Display Daltonizer

Accessibility Display Daltonizer is a color correction setting which is used to modify color space adjustment on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Accessibility Display Daltonizer on the device.
- **Disable** will deactivate the Accessibility Display Daltonizer on the device.

Value

Enable

Accounts

Data Auto-Sync

Data Auto-Sync enables to synchronize app data across multiple devices automatically. In other words, you open an app in one device and pick up exactly where you left on another.

This setting is used to enable or disable Data Auto-Sync on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Data Auto-Sync on the device.
- **Disable** will deactivate the Data Auto-Sync on the device.

Value

Enable

Battery

Battery Upper Limit

This setting is used to provide the value of Upper Limit for Battery on the device as a percentage. You can type a desired value in the text box provided.

When you charge your device, as soon as battery actually reaches the Upper Limit %, it will show 100% in the view.

Value

100

Battery Lower Limit

This setting is used to provide the value of Lower Limit for Battery on the device as a percentage. You can type a desired value in the text box provided.

When you remove device from the charge, the battery percentage will be according to the lower limit and upper limit as per this formula:

If $(A \geq UL)$ $R = 100 \%$ else if $(A \leq LL)$ $R = A$ else $R = (100-LL) * (A-LL) / (UL-LL) + LL$

where ,

A - Actual battery

UL - Upper Limit

LL - Lower Limit

Value

10

UPS30BAY

This setting is used to show or hide UPS30BAY.

This setting has two options:

- **Show** – Show UPS30BAY.
- **Hide** – Hide UPS30BAY.

This is only applicable for the wireless 30Bay.

UPS would like the charge rack to always look like power is applied. The request is for the SW at the low level to handle the power cycling that occurs normally as part of the charge complete mechanism.

Enable Fast Charge

This setting is used to enable or disable fast charge (supported on Pie).

This setting has two options.

- **Enable** – Enable fast charge.
- **Disable** – Disable fast charge.

Sensors

Keep Device Awake on Motion Detection

This setting enables to keep the display of the device ON when motion is detected.

Select a desired option from the drop-down list box provided.

Note: This setting is not applicable for VM1A.

The setting has two options:

- **Yes** will enable the Keep Device Awake on Motion Detection option on the device.
- **No** will disable the Keep Device Awake on Motion Detection option on the device.

Value

Enable

Wake Device Up on Motion Detection

This setting enables to wake up when any motion on the device is detected.

Note: This setting is not applicable for VM1A.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Yes** will enable the Wake Device Up on Motion Detection option on the device.
- **No** will disable the Wake Device Up on Motion Detection option on the device.

Value

Enable

Suspend Device When Face Down

This setting turns the screen off automatically when you put the device into your pocket or onto a table. The feature helps to improve battery life by turning off the display when not in use.

Note: This setting is not applicable for VM1A.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Yes** will enable the Suspend Device When Face Down option on the device.
- **No** will disable the Suspend Device When Face Down option on the device.

Value

Yes

Developer Settings

Bluetooth HCI Log

This setting enables Bluetooth HCI snoop log configuration on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Bluetooth HCI Log option on the device.
- **Disable** will deactivate the Bluetooth HCI Log option on the device.

Value

Enable

Enable Bug Report

This setting allows the user to enable or disable bug reporter service on the device.

Note: This setting is not applicable for VM1A.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Bug Report option on the device.
- **Disable** will deactivate the Bug Report option on the device.

Value

Enable

Enable View Attributes

This setting controls whether views are allowed to save their attribute data or not.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Yes** will enable the Enable View Attributes option on the device.
- **No** will disable the Enable View Attributes option on the device.

Value

Yes

Enable Show Taps

This setting controls whether to show touch positions on screen or not.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Yes** will enable the Enable Show Taps option on the device.
- **No** will disable the Enable Show Taps option on the device.

Value

Yes

Show Pointer Location

This setting controls whether to show pointer locations onscreen or not.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Yes** will enable the Show Pointer Location option on the device.
- **No** will disable the Show Pointer Location option on the device.

Value

Yes

USB Audio Automatic Routing Disabled

This setting allows the user to set whether automatic routing of system audio to USB audio peripheral should be disabled or not. Select a desired option from the drop-down list box provided.

The setting has two options:

- **Yes** will enable the Anonymous Identity setting on the device.
- **No** will disable the Anonymous Identity setting on the device.

Value

Yes

Enable All ANR Visibility

This setting enables the device to show all invisible Application Not Responding (ANRs) running in the background in a dialog box.

Select a desired option from the drop-down list box provided.

- **Enable** will activate the Enable All ANR Visibility feature on the device.
- **Disable** will deactivate the Enable All ANR Visibility feature on the device.

Value

Enable

Aggressive Wi-Fi To Mobile Handover

This setting allows the user to set whether to enable aggressive handover of Wi-Fi to cellular data connection when Wi-Fi signal is low or not.

Note: This setting is supported on operating systems below Pie.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Aggressive Wi-Fi To Mobile Handover option on the device.
- **Disable** will deactivate the Aggressive Wi-Fi To Mobile Handover option on the device.

Value

Enable

Keep Mobile Data Always Active

This setting is used to set whether to keep cellular data always active or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Yes** will enable the Keep Mobile Data Always Active option on the device.
- **No** will disable the Keep Mobile Data Always Active option on the device.

Value

Yes

Boot From Charger Mode

This setting is used to set whether to enable boot from charger mode or not on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Boot From Charger Mode on the device.
- **Disable** will deactivate the Boot From Charger Mode on the device.

Value

Disable

Enable ADB

This setting is used to control your device over USB from a computer, copy files back and forth, install and uninstall apps, run shell commands and more.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Enable** will activate the Enable ADB on the device.
- **Disable** will deactivate the Enable ADB on the device.

Value

Enable

OS Update Package URL

Specify a URL with a specific OS firmware update package to download and install. The OTA (Over-The-Air) package filename in the URL must be the same as that provided by Honeywell and cannot be changed.

Value

URL Protocols supported - File, HTTP, HTTPS, FTP and SFTP.

Enable OS Downgrade with Enterprise Reset

This setting will allow or disallow the system firmware downgrades on the device.

Select a desired option from the drop-down list box provided.

The setting has two options:

- **Yes** will allow the system firmware downgrades on the device.
- **No** will disallow the system firmware downgrades on the device.

Note: On some devices, the downgrade operation will also perform a enterprise reset (user storage will be wiped) [Requires FW: 86.xx.13+].

Value

Yes

Data Processing Settings

Data Editing Plugin

Data Editing Plugin

Data Editing Plugin specifies the plugin to manipulate the bar code data.

The data editing plug-in interface will display a list of plug-ins (broadcast receivers with EDIT_DATA action) that are installed on the device.

Data Collection Service will obtain all these plugins by querying for receivers that can handle "com.honeywell.decode.intent.action.EDIT_DATA" intent.

Value

None.

A "None" plugin can be selected in case user requires no plugin.

Editing Settings

This setting will navigate the user to the Edit Settings activity in the plugin.

Value

None.

Data Collection Service will check if there exists an activity in the selected plugin to edit the plugin settings.

If edit settings activity is present, then the "Edit Settings" preference is enabled on the device otherwise this option will be disabled.

Data Intent

Action

Action is a string that specifies the generic action to perform. The action determines how the rest of the intent is structured—particularly the information that is contained in the data and extras.

Value

```
ACTION_VIEW = "com.example.action.view"
```

You should use this in an intent when you have some data to view through another app, such as a photo to view in a gallery app, or an address to view in a map app.

Category

Category is a string containing additional information about the kind of component that should handle the intent. Any number of category descriptions can be placed in an intent, but most intents do not require a category.

Value

```
CATEGORY_LAUNCHER
```

Class Name

This setting allows the user to provide a class name on the device.

Enter the Class Name in the text box provided.

Value

```
Democlass
```

Data Intent

The Barcode Data Intent enables the reception and processing of barcode data without using an SDK or library.

To enable or disable the Data Intent settings, select a desired option from the drop-down list box provided.

The setting has two options:

- **True** will activate the Data Intent Settings on the device.
- **False** will deactivate the Data Intent Settings on the device.

Value

False

Package Name

This setting allows the user to provide a package name on the device.

Value

org.example.demo

Charset

Charset controls the Character Set that is supported to interpret bar code binary data on the device.

The user is allowed to select a desired charset from the available list on the device.

Value

ISO-8859-1

Launch Browser

This setting enables the device to launch a browser when barcode data begins with http:// or https://.

If the bar code starts with http:// or https:// , the browser opens using the bar code data as a URL.

To enable or disable the Launch Browser setting on the device, select a desired option from the drop-down list box.

The setting has two options:

- **True** will activate the Launch Browser setting on the device.
- **False** will deactivate the Launch Browser setting on the device.

Value

True

Launch EZConfig

This setting allows the user to enable or disable special handling of EZConfig barcodes.

This setting applies to EZConfig bar codes that are encoded with the Aztec symbology and contain specific header data.

To enable or disable Launch EZConfig on the device, select a desired option from the drop-down list box.

The setting has two options:

- **True** will activate Launch EZConfig on the device.
- **False** will deactivate Launch EZConfig on the device.

Value

True

Prefix

This setting allows the user to set the Prefix, which is the text that is prepended to the bar code data.

The user is allowed to set a desired value for prefix which is added to the scanned barcode data automatically.

Value

Examples : \n, \t.

For instance the barcode data scanned by the device is 1DANA#%12 and the prefix set on the device is \n, then the final data that appears in the edit box will be the combination of the prefix and the Scanned data. i.e. \n1DANA#%12.

Scan to Intent

This setting enables the device to launch an app specified by a barcode when data begins with //.

To enable or disable Scan to Intent setting on the device, select a desired option from the drop-down list box.

The setting has two options:

- **True** will activate the Scan to Intent setting on the device.
- **False** will deactivate the Scan to Intent setting on the device.

Value

True

Suffix

This setting allows the user to set the Suffix, which is the text that is appended to the bar code data.

Value

Examples : \n, \t.

For instance the barcode data scanned by the device is 1DANA#%12 and the suffix set on the device is \n, then the final data that appears in the edit box will be the combination of the suffix and the Scanned data. i.e. 1DANA#%12\n.

Symbology Prefix

This setting determines the symbology identifier to be used if any prefix needs to be added to the barcode data.

Select the setting to be configured to the device from the drop-down list box.

The setting has three options:

- **None**
- **Honeywell**
- **AIM**

Value

None

Wedge as keys

This is a list of character values to wedge as keys, represented as a common-separated list of decimal values.

Value

9, 10

Wedge

This setting allows the user to enable or disable the wedge option in the data processing settings.

To enable or disable the Wedge Setting on the device, select a desired option from the drop-down list box.

The setting has two options:

- **True** will activate the Wedge setting on the device.
- **False** will deactivate the Wedge setting on the device.

Value

True

Decode Settings

Center Decode

Center decode setting enables bias decoding to the center window on the device.

This setting is useful in situations where several bar codes may be very close together in the imager field-of-view.

Value

50

This value defines the "center" area of the bar code.

Window Bottom

This setting allows the user to set the Window Bottom value on the device to a desired level. The Window Bottom value ranges from 0 to 100.

You can type a desired Window Bottom value within the range in the text box provided.

Value

50

Window Left

This setting allows the user to set the Window Left value on the device to a desired level. The Window Left value ranges from 0 to 100.

You can type a desired Window Left value within the range in the text box provided.

Value

50

Window Right

This setting allows the user to set the Window Right value on the device to a desired level. The Window Right value ranges from 0 to 100.

You can type a desired Window Right value within the range in the text box provided.

Value

50

Window Top

This setting allows the user to set the Window Top value on the device to a desired level. The Window Top value ranges from 0 to 100.

You can type a desired Window Top value within the range in the text box provided.

Value

50

Decode Security

This setting controls the reading tolerance of the decoder. Lower setting values will be more lenient when reading low quality barcodes while higher values will be stricter.

You can type a desired Decode Security value within the range in the text box provided.

Value

2

Decode Set

This setting allows the user to adjust the decode set properties on the device.

Select the value to be configured to the device from the drop-down list box provided.

Value

None

DPM Mode

This setting specifies whether DPM decoding is enabled during the execution of decode.

Select the DPM mode to be configured to the device from the drop-down list box.

The setting has three options:

- **No DPM Optimization**
- **Dotpeen PDM decoding**
- **Reflective DPM decoding**

Value

No DPM optimization

Region of Interest

This setting allows the user to set the Region of Interest (ROI) that is processed by the decoder.

Select the Region of Interest to be set for decoding.

The setting has five options:

- **Disable** ROI is disabled and the entire original image is sent to the decoder.
- **Standard** Use the aimer position to weight activity. Activity calculated on the row and the column in the middle of each cell. The ROI window may not include the aimer.
- **Standard, aimer centered** Activity calculated on the row and the column in the middle of each cell. The ROI window will always include the aimer.
- **DPM, aimer centered** Activity calculated on 4 rows and 2 columns in each cell. The ROI window will always include the aimer.
- **Kiosk/Presentation application** Ignore aimer position, no weight activity. Activity calculated on the row and the column in the middle of each cell. The ROI window may not include the aimer.

Value

Disable

Video Mode

Video Mode specifies whether normal or inverse decoding for linear symbologies is enabled during the execution of decode.

Select the Video Mode to be configured to the device from the drop-down list box.

The setting has three options:

- **Normal**
- **Inverse**
- **Normal and Inverse**

Value

Normal

Imager Settings

Exposure Mode

This setting configures the device to automatically update exposure to improve image quality.

Select the desired exposure mode to be configured to the device using the drop-down list box.

Value

Context Sensitive Exposure

Exposure (μ s)

This setting determines the exposure time in microseconds when fixed exposure setting is being enabled on the device.

Select an exposure time value to be configured to the device using the up and down arrows inside the spin box provided or the user can also type a valid value within the range.

Value

4800

Gain

This setting determines the sensitivity of image sensor when fixed exposure is enabled on the device.

Select a gain value to be configured to the device using the up and down arrows inside the spin box provided or the user can also type a valid value within the range.

Value

1024

Illumination Intensity

This setting allows the user to set intensity of imager light on the device.

You can type a desired Illumination Intensity value within the range in the text box provided.

Value

100

Maximum Exposure Time (μs)

This setting determines the Maximum Exposure time in microseconds when automatic exposure is enabled on the device.

You can type a desired Maximum Exposure Time in the text box provided.

Value

60000

Maximum Gain

This setting determines the maximum sensitivity of image sensor when automatic exposure is enabled.

You can type a desired Maximum Gain value within the range in the text box provided.

Value

1024

Override Recommended Values

This setting allows the user to set custom image on the device.

To enable or disable the Override Recommended Values setting on the device, select a desired option from the drop-down list box.

The setting has two options:

- **True** will activate the Override Recommended Values setting on the device.
- **False** will deactivate the Override Recommended Values setting on the device.

Value

False

Rejection Limit

This setting determines the maximum number of images to ignore because of unacceptable exposure result. The valid value ranges from 0 to 100.

You can type a desired Rejection Limit value within the range in the text box provided.

Value

5

Sampling Method

This setting defines how image quality is determined by software controlled exposure modes.

To adjust the Sampling Method on the device, select the desired sampling method to be configured using the drop-down list box provided.

Value

Center Weighted Sampling

Target Acceptable Offset

This setting determines the acceptable difference from target calculated value of image during automated exposure control. The valid value ranges from 0 to 255.

You can type a desired Target Acceptable Offset value within the range in the text box provided.

Value

40

Target Percentile

This setting determines the target percentile of target value for the automatic exposure mode on the device. The valid value ranges from 0 to 100.

You can type a desired Target Percentile value within the range in the text box provided.

Value

97

Target Value

This setting determines the target calculated value of image during automated exposure control. The valid value ranges from 0 to 255.

You can type a desired Target value within the range in the text box provided.

Value

100

Notification Settings

Bad Read Notification

This setting allows the user to enable or disable bad read notification on the device.

The bad read notification consists of a red blink of the Scan Status LED, an error beep, and an optional short vibration.

To enable or disable the Bad Read Notification setting on the device, select a desired option from the drop-down list box.

The setting has two options:

- **True** will activate the Bad Read Notification setting on the device.
- **False** will deactivate the Bad Read Notification setting on the device.

Value

False

Good Read Notification

This setting allows the user to enable or disable good read notification on the device.

The good read notification consists of a green blink of the Scan Status LED, a short beep, and an optional short vibration.

To enable or disable the Good Read Notification setting on the device, select a desired option from the drop-down list box.

The setting has two options:

- **True** will activate the Good Read Notification setting on the device.
- **False** will deactivate the Good Read Notification setting on the device.

Value

True

Vibrate on Notification

This setting allows the user to enable or disable vibration on the device when there is a good or bad read notification.

To enable or disable the Vibrate on Notification setting on the device, select a desired option from the drop-down list box.

The setting has two options:

- **True** will activate the Vibrate on Notification setting on the device.
- **False** will deactivate the Vibrate on Notification setting on the device.

Value

False

Trigger Settings

Same Symbol Timeout

Enable Same Symbol Timeout

This setting allows the scanner to reread the same barcode after a time interval during continuous scanning.

To enable or disable the Same Symbol Timeout setting on the device, select a desired option from the drop-down list box.

The setting has two options:

- **True** will activate the Same Symbol Timeout setting on the device.
- **False** will deactivate the Same Symbol Timeout setting on the device.

Value

False

Same Symbol Timeout

This setting allows the user to set the time period in seconds before the scanner can reread the same barcode in continuous trigger scan mode.

This can be adjusted to prevent inadvertent scans of the same barcode if the code is left in the scan field longer than the Decode Timeout limit.

You can type a desired Same Symbol Timeout value within the range in the text box provided.

Value

1000 seconds

Decode Timeout

This setting allows the user to set the timeout value in seconds after which the scanner automatically turns off if the scan button is pressed and nothing has successfully decoded.

You can type a desired Decode Timeout value within the range in the text box provided.

Value

20 seconds

Enable Scan Trigger

This setting allows the user to enable or disable activating the imager by pressing the side scan buttons or the virtual scan button in the Scan Demo app.

To enable or disable the Scan Trigger setting on the device, select a desired option from the drop-down list box.

The setting has two options:

- **True** will activate the Scan Trigger setting on the device.
- **False** will deactivate the Scan Trigger setting on the device.

Value

True

Scan Delay

This setting allows the user to set the minimum amount of time in seconds before the scanner can read another bar code.

You can type a desired Scan Delay value within the range in the text box provided.

Value

0

Trigger Scan Mode

This setting allows the user to set the trigger scan mode to allow continuous or normal scanning.

To adjust the Trigger Scan Mode on the device, select a desired option from the drop-down list box.

The setting has four options:

- **One shot**
- **Continuous**
- **Read on release**
- **Read on second trigger press**

Value

One Shot

Honeywell
9680 Old Bailes Road
Fort Mill, SC 29707

www.honeywellaidc.com